

FURUNO

CHART RADAR



Models:

FAR-3000 series

FURUNO FAR-3000 Chart Radar offers the and navigation safety by greatly enhanced

Newly developed antennas with enhanced high durability and reliability



- ▶ Newly designed antenna scanners to suppress the aerodynamic drag and prevent a spike in temperature
- ▶ Less maintenance required through use of the DC brushless motor
- ▶ Ethernet network link between antenna unit and below deck processor unit

The analog signals are converted into the digital signals within the antenna unit and sent to the below deck processor unit via Ethernet network. This network technology eliminates loss of signal gain between antenna unit and processor unit that may be seen in conventional Radar system.
- ▶ Optional LAN Signal Converter enables users to extend the cable between antenna unit and processor unit or to utilize the existing cables when retrofitting

NEW Solid State transceiver available (for S-band)

- ▶ Less noise and much clearer targets

FURUNO's Solid State Radar technology generates clearer echo images, which allows users to obtain clearer picture of what are around their vessel, including weak targets from small craft.



Solid State

The newly developed Power Amplifier generates properly modulated radio frequency to the targets around the vessels. Also, the receiver catches the weak signals, which are processed inside the Power Amplifier module to reduce the **clutters**.



Power Amplifier Module
of the Solid State transceiver

- ▶ Fan-less antenna design requires less maintenance
- ▶ Lower maintenance hours and costs compared to Magnetron radar

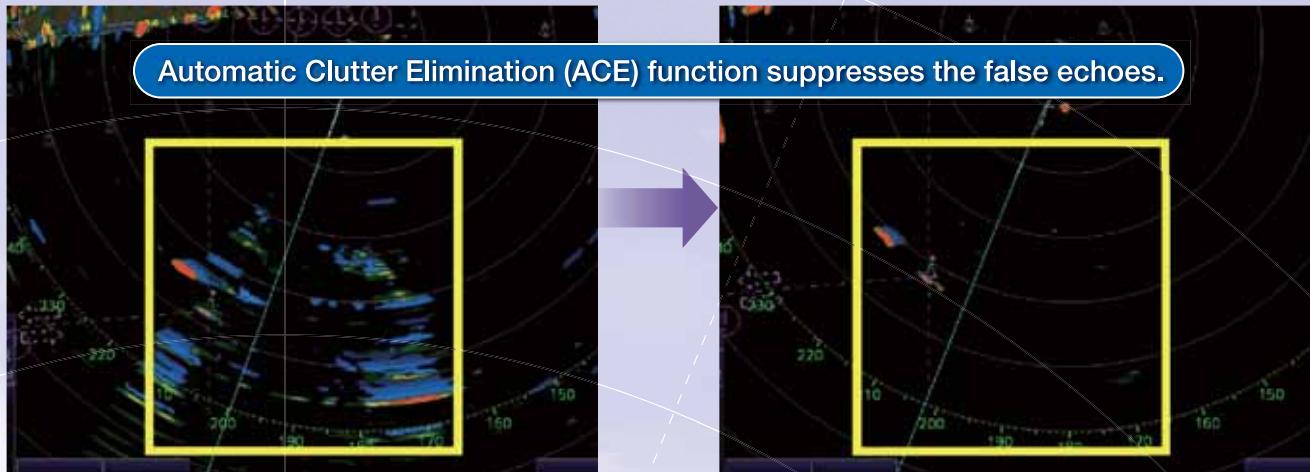
No need to replace the Magnetron

reliable situation awareness target detection

► Automatic Clutter Elimination (ACE) function provides clear echoes

Users can quickly adjust the radar image with a single action. When Automatic Clutter Elimination (ACE) function is activated, the system automatically adjusts the clutter reduction filter and gain control according to the sea and weather conditions selected (Calm/Rough Sea/Hard Rain).

Our advanced echo averaging architecture is also incorporated into Automatic Clutter Elimination (ACE) function. Users can avoid complicated adjustment processes, resulting in clear echo images.

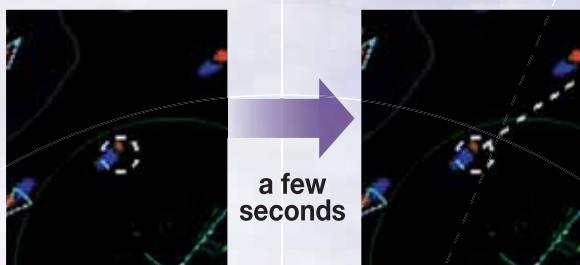


Automatic Clutter Elimination (ACE)
OFF

Automatic Clutter Elimination (ACE)
ON

► Improved Target Tracking (TT) function

- Target acquisition takes only a few seconds



- Acquired target does not jump to adjacent target
- Reliable and stable tracking of high-speed and rapidly maneuvering vessels

► Advanced Interference Reduction (IR) function

Target Echo does not become smaller even with IR on

► 27" wide LCD monitor (model: MU-270W) selectable

- Easy switching of the screen between DVI1 and DVI2 with a locally supplied switching box
- Automatic switching the signal source from DVI1 to DVI2, when the DVI1 signal fails

► Complies with the following regulations:

- IEC62388 Ed. 2.0
- IEC61174 Ed. 3.0
- IEC62288
- IEC61162-1 Ed. 4.0
- IEC61162-2



Multifunction display (MFD) capability*

FURUNO offers workstations that combine flexibility and redundancy. Users may easily select ECDIS, Chart Radar, Conning display or Alert Management System at any multi-function display. Navigators will enjoy reduced workload and significant freedom to move about the bridge. All necessary information is available on a variety of displays and at locations that may be altered as required.

*MFD capability is to be implemented as software update



Radar (Chart ON)

Radar (Chart OFF)

ECDIS

Conning Information Display

Sensor Adapter

► Common sensor adaptor makes installation and maintenance easy

The Sensor Adapter acts as a central medium to gather all of the sensor data and collectively feed it to all FAR-3000 Chart Radar and FMD-3200/3300 ECDIS in the network. Since the sensor adapter can be extended to interface with all the sensors within the network, individual cable connections in the sensor-to-Chart Radar/ECDIS interface can be greatly reduced.



Navigation sensors can be directly interfaced with the processor's 8 serial I/O ports.

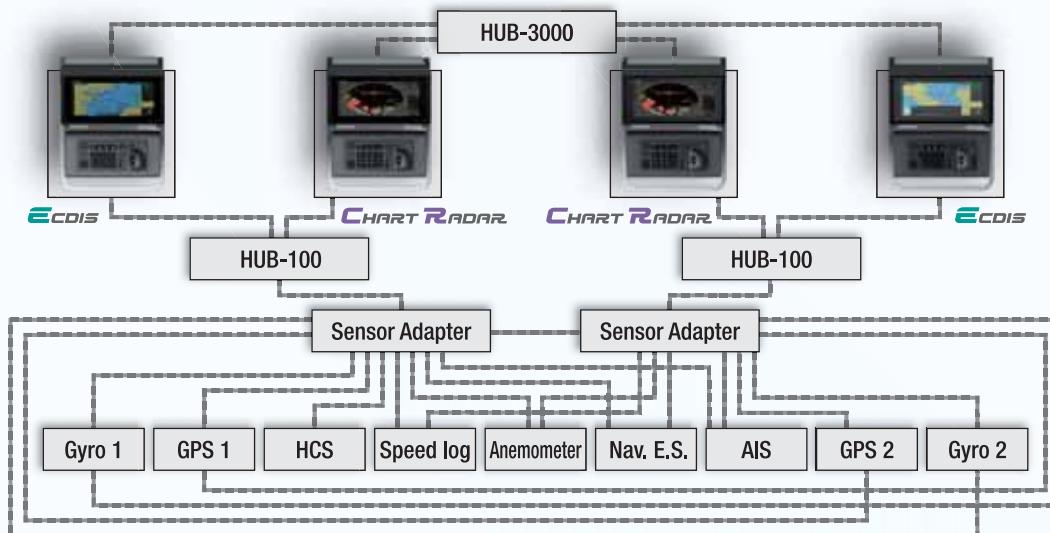
Sensor adapters are required under the following conditions:

- The sensor data is to be shared amongst multiple networked Chart Radar and ECDIS systems,
- The number of sensors interfaced is more than the number of the ports the processor has (8 serial I/O ports, 1 digital IN and 6 digital OUT), and/or
- The networked sensors include analog sensors.

In order to integrate onboard sensors into the navigation network, the sensor adapter may be interfaced with the switching hub HUB-100 from which distribution of the sensor data throughout the network is possible. Alternatively, multiple sensor adapters may be interfaced via Ethernet to integrate onboard sensors for use in the shipboard network.

System diagram for the new Chart Radar

Model: FAR-3000



FURUNO's new user interface delivers straightforward operation



Unique & smart operation tool – “Status bar” and “InstantAccess bar™”

The user interface of the Radar utilizes carefully organized operational tools: The Status bar and The InstantAccess bar™. These operational tools deliver straightforward, task-based operation by which the operator can quickly perform tasks without having to navigate an intricate menu tree.

Status bar

Status bar contains information about the operating status, i.e., MFD operating mode, main tasks assigned to each MFD operating mode.

InstantAccess bar™

InstantAccess bar contains all the tasks (functions or actions) corresponding to the operation mode currently selected so that quick access to necessary functions/actions can be made.



Stress-free operation with the well-designed control unit



Intuitive operation

All operations can be controlled with the trackball.

Contextual menu

The context menu contains all the available actions related to the selected icon or area, it provides quick access to tasks.



SPECIFICATIONS

PRODUCT NAME

MARINE RADAR

GENERAL

Range Scales and Ring Intervals

Range scales (NM)	0.125	0.25	0.5	0.75	1	1.5	2	3	4	6
Ring intervals (NM)	0.025	0.05	0.1	0.25	0.25	0.25	0.5	0.5	1	1
Number of Rings	5	5	5	3	4	6	4	6	4	6

Range scales (NM)	8	12	16	24	32	48	72	96
Ring intervals (NM)	2	2	4	4	8	8	12	16
Number of Rings	4	6	4	6	4	6	6	6

1, 2, 4, 8, 16, 32, 72 NM cannot be selected on IMO radar.

ANTENNA UNIT

Radiator Type Slotted waveguide array

Beamwidth and Sidelobe

Radiator Type	XN12CF	XN20CF	XN24CF	SN36CF
Length	4 ft	6.5 ft	8 ft	12 ft
Frequency	X band: 9410±30 MHz		S band: 3050±30 MHz	
Beamwidth (H) (-3 dB)	1.9°	1.23°	0.95°	1.8°
Beamwidth (H) (+20 dB)	4.5°	2.9°	2.4°	4.5°
Beamwidth (V)	20°	20°	20°	25°
Sidelobe (within ±10°)	-24 dB	-28 dB	-28 dB	-24 dB
Sidelobe (outside ±10°)	-30 dB	-32 dB	-32 dB	-30 dB

TRANSCEIVER UNIT

Transceiver Unit	Magnetron			Solid State		
Frequency	RTR-105 RTR-106 RTR-108			RTR-107 RTR-109		
	X band: 9410±30 MHz			S band: 3050±30 MHz		
	①PON: 3043.75 MHz/QON: 3063.75±5 MHz			②PON: 3053.75 MHz/QON: 3073.75±5 MHz		
Output Power	12 kW	25 kW	30 kW	250 W		

Pulse length, Pulse Repetition Rate (PRR) and Range scale

Magnetron

Pulse length (μs)	0.07	0.15	0.3	0.5	0.7	1.2
PRR (Hz)	3000*	3000*	1500	1200	1000	600**
Range scale (NM)	0.125/0.25/ 0.5/0.75/ 1.5/2	0.5/0.75/ 1/1.5/2/3/4	0.75/1/1.5/ 2/3/4/6/ 8/12	1.5/2/3/ 4/6/8/12/ 16/24	3/4/6/8/ 12/16/24	6/8/12/16/ 24/32/48/ 96

Solid State

Pulse length (μs)	PON	0.07	0.18	0.3	0.5	0.7	1.2
	QON	5.0	7.5	12.5	17.5	18.3	18.3
PRR (Hz)		2400***	2000****	1500	1060	1000	600 (96 NM)
Range scale (NM)	0.125/0.25/ 0.5/0.75/ 1.5/2	0.5/0.75/ 1/1.5/2/3/4	0.75/1/1.5/ 2/3/4/6/8	3/4/6/8/ 12/16/24	3/4/6/8/ 12/16/24	6/8/12/16/ 24/32/48/ 96	

* 2200 Hz on TT range = 32 NM

** 500 Hz on 96 NM range

*** 1800 Hz on TT range = 32 NM

**** 1500 Hz on TT range = 32 NM

PROCESSOR UNIT

Chart Materials IMO/IHO S57 edition-3 ENC vectorized material (IHO S-63 ENC data protection scheme), C-MAP and CM-93/3 vectorized materials

Data Presentation

Own Ship

Own ship's mark and numeral position in lat/lon, speed and course

Target Data(TT: ARPA, AIS)

Range, bearing, speed, course, CPA/TCPA, BCR/BCT

Target information from AIS (waypoint, ship's hull and status)

Position Calculation

Navigation by result from external position sensor

Dead reckoning with gyro and log data from gyro, log, and position sensors to be fed to mathematical filter to generate highly accurate position and speed

Planning by rhumb line, great circle

Off-track display, waypoint arrival alarm, shallow depth alarm

User chart creation and display

Create and display notes data

Position, and other data at time of man overboard are recorded MOB mark is displayed on the screen

DISPLAY UNIT

Display Unit	MU-190	MU-231	MU-270W
Display Type	19" color LCD	23.1" color LCD	27" color wide LCD
Resolution	SXGA (1280x1024 pixels)	UXGA (1600x1200 pixels)	WUXGA (1920x1200 pixels)

INTERFACE

Processor Unit

DVI	2 ports, DVI-D (Video signal from DVI-1 and DVI-2 is identical)
LAN	1 port, DVI-I Ver. 1.1 (RGB for VDR)
USB	2 ports, Ethernet 1000 Base-T (for Interswitch and Sensor Adapter)
COM	1 port, 100 Base-TX (for Radar sensor)
Serial I/O	4 ports, USB 2.0 type-A

8 ports IEC61162-1/2 (2 ports), IEC61162-1 (6 ports)

Sentences

Input	ABK, ACK, ACM, ALR, CUR, DBT, DPT, DTM, GGA, GLL, GNS, HBT, HDT, MTW, MWV, RMC, THS, VBW, VDM, VDR, VHW, VTG, ZDA
-------	---

Output ABM, ACK, ALC, ALF, ALR, ARC, BBM, EVE, HBT, OSD, RSD, TBL, TTD, TTM, VSD

Digital Input 1 port (for ACK signal input)

Contact Closure 6 ports

1 port for system fail, 1 port for power fail, 2 ports for normal close, and 2 ports for normal open

Sensor Adapter

Control and Serial Input

LAN	1 port, Ethernet 100 Base-TX
Serial	8 ports

IEC 61162-1/2 (4 ports), IEC 61162-1 (4 ports)

Analog Input 3 ports/unit, -10 to +10 V/0 to 10 V, 4 to 20 mA selectable

Digital Input 8 ports/unit, normal close or open, selectable

Digital Output 8 ports/unit, normal close or open, selectable

POWER SUPPLY

Monitor unit

MU-270W 100-230 VAC; 0.7-0.4 A, 1 phase, 50/60Hz

MU-231 100-230 VAC; 1.0-0.6 A, 1 phase, 50/60Hz

MU-190 100-230 VAC; 0.7-0.4 A, 1 phase, 50/60Hz

Processor unit 100/230 VAC, 1 phase, 50/60 Hz

Power Supply Unit

	Input Voltage	Input Current
PSU-014	100-230 VAC	3.7 A
PSU-015	1 phase	6.4 A
PSU-016	50/60 Hz	2.8 A
PSU-018	50/60 Hz	5.6 A

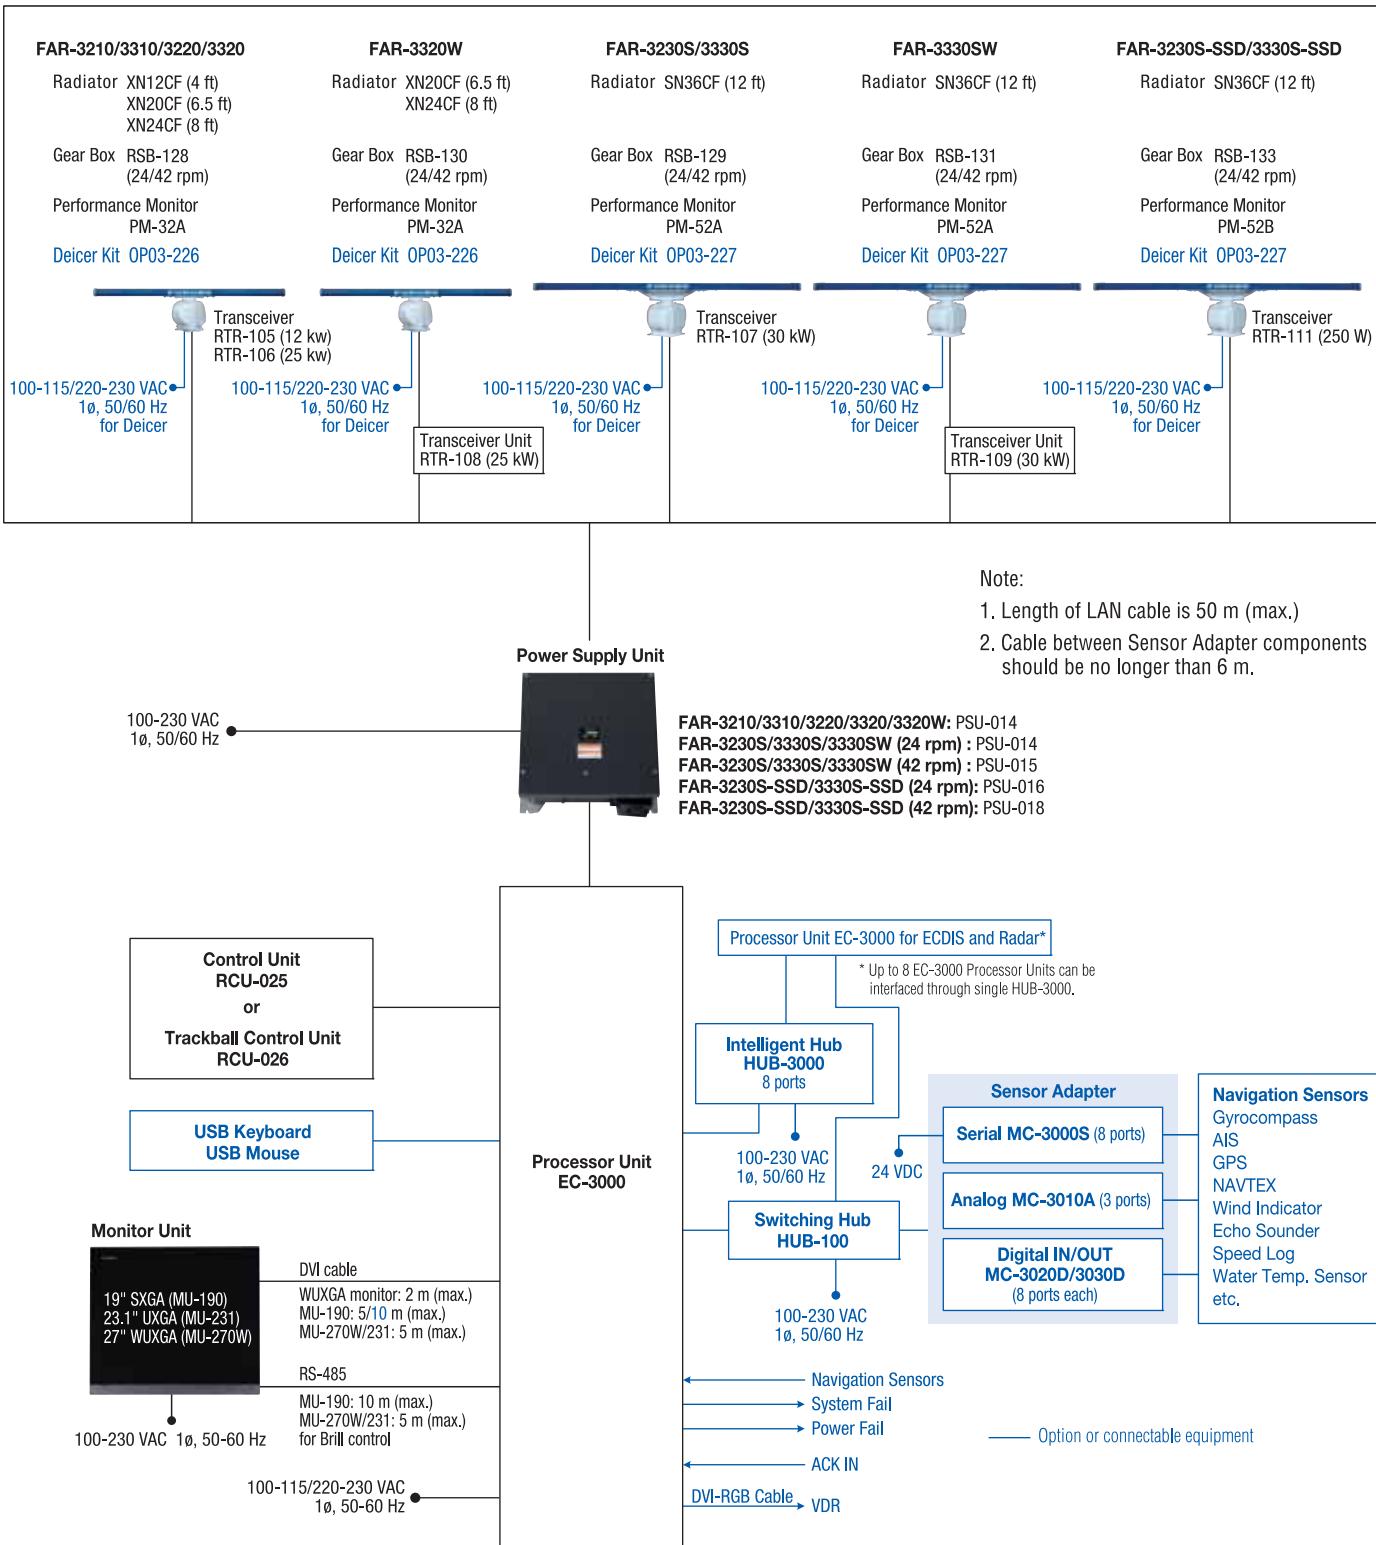
ENVIRONMENTAL CONDITIONS

Unit	Ambient Temperature	Relative Humidity	Degree of protection	Vibration	
Antenna Unit	-25°C to +55°C (storage +70°C)	93 % or less at 40°C	IP56	IEC 60945 Ed. 4	
Power Supply Unit	-15°C to +55°C		IP20		
Processor Unit			IP20		
Control Unit			IP22		
Sensor Adapter			IP22		
Monitor Unit			IP22		

EQUIPMENT LIST

Standard			
Display Unit	MU-190/231/270W	1 unit	
Processor Unit	EC-3000	1 unit	
Control Unit		1 unit	
Radar Control Unit	RCU-025	1 unit (specify when ordering)	
Trackball Control Unit	RCU-026		
Antenna Radiator	XN12CF/XN20CF/XN24CF/SN36CF	1 unit	
Transceiver	RTR-105/106/107/108/109/111	1 unit	
Gear Box	RSB-128/129/130/131/133	1 unit	
Performance Monitor	PM-32A/52A/52B	1 unit	
Power Supply Unit	PSU-014/015/016/018	1 unit	
Cable between Power Supply Unit and Antenna Unit		1 pc	
LAN Cable between Processor Unit and Power Supply Unit		1 pc	
Standard Spare Parts and Installation Materials		1 set	
Option			
Sensor Adapter	MC-3000S/3010A/3020D/3030D		
Sub Display Radar Cable	RW-00136		
Deicer	OP-00226/227		
Junction Box (for foremast mounting)	RJB-001		
Composite Cable between Junction Box and Antenna/Power Supply Unit (for foremast mounting)	RW-9600		
LAN Signal Converter (for foremast mounting)	OP03-223		
Switching Hub for sensor network	HUB-100		
Intelligent Hub for interswitch network	HUB-3000		


INTERCONNECTION DIAGRAM



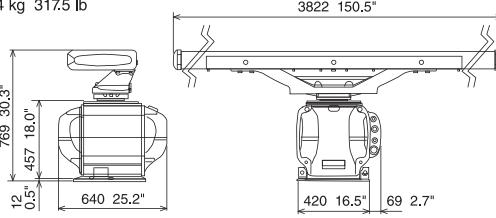
Model	Output Power	Transceiver Unit	Gear Box	Radiator Length	Rotation	Power Supply Unit		Display Unit	
						24 rpm	42 rpm		
FAR-3210	X band 12 kW	RTR-105	RSB-128 RSB-130 RSB-129 RSB-131 RSB-133	4 ft (XN12CF)	24/42 rpm	PSU-014	PSU-015 PSU-016 PSU-014 PSU-014 PSU-016	19.0" SXGA (MU-190)	
FAR-3310				6.5 ft (XN20CF)				27" WUXGA (MU-270W) or 23.1" UXGA (MU-231)	
FAR-3220				8 ft (XN24CF)				19.0" SXGA (MU-190)	
FAR-3320	X band 25 kW	RTR-106		6.5 ft (XN20CF)				27" WUXGA (MU-270W) or 23.1" UXGA (MU-231)	
FAR-3320W		RTR-108		8 ft (XN24CF)				27" WUXGA (MU-270W) or 23.1" UXGA (MU-231)	
FAR-3230S	S band 30 kW	RTR-107	RSB-129	12 ft (SN36CF)		PSU-014 PSU-015 PSU-014 PSU-014 PSU-016	PSU-015 PSU-018 PSU-015 PSU-015 PSU-018	19.0" SXGA (MU-190)	
FAR-3230S-SSD	S band 250 W	RTR-111	RSB-133					19.0" SXGA (MU-190)	
FAR-3330S	S band 30 kW	RTR-107	RSB-129					27" WUXGA (MU-270W) or 23.1" UXGA (MU-231)	
FAR-3330SW	S band 30 kW	RTR-109	RSB-131					27" WUXGA (MU-270W) or 23.1" UXGA (MU-231)	
FAR-3330S-SSD	S band 250 W	RTR-111	RSB-133					27" WUXGA (MU-270W) or 23.1" UXGA (MU-231)	

Antenna Unit for FAR-3210/3310/3220/3320/3320W

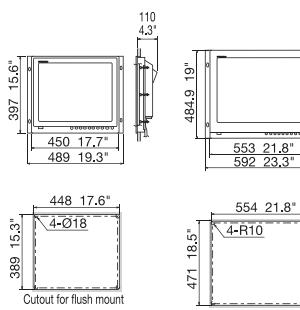
Radiator XN12CF 46.2 kg 101.9 lb
 XN20CF 48.1 kg 106.1 lb
 XN24CF 49.3 kg 108.7 lb

**Antenna Unit for FAR-3230S/3330S/3330SW/3230S-SSD/3330S-SSD**

Radiator SN36CF 144 kg 317.5 lb

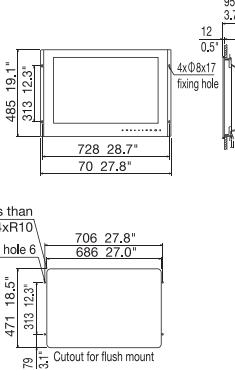
**Monitor Unit**

MU-190
8.8 kg 19.4 lb

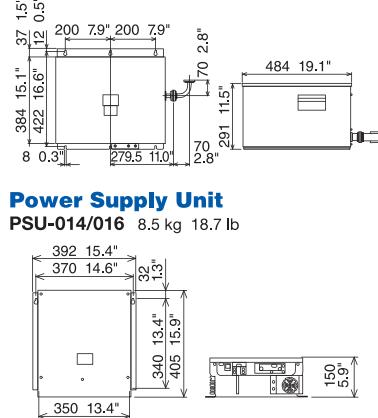


MU-231
12.8 kg 28.2 lb

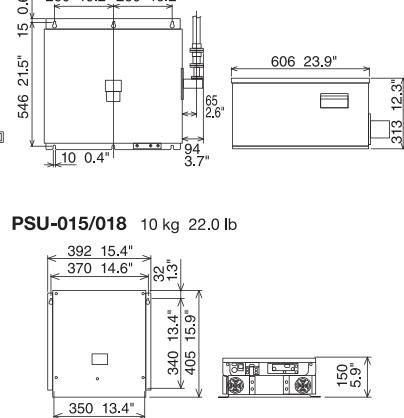
MU-270W
13 kg 28.7 lb

**Transceiver Unit for FAR-3320W**

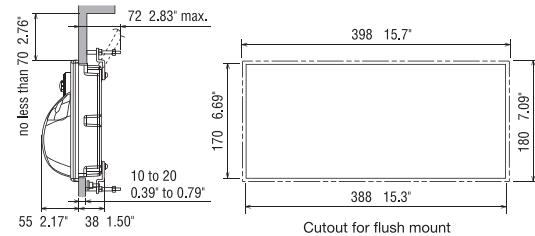
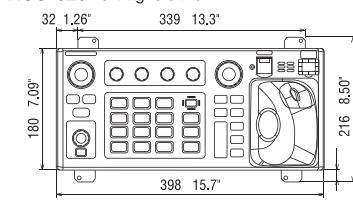
RTR-108 17 kg 37.5 lb

**Transceiver Unit for FAR-3330SW**

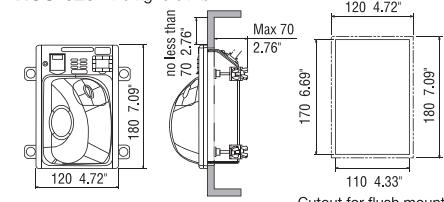
RTR-109 22 kg 48.5 lb

**Control Unit**

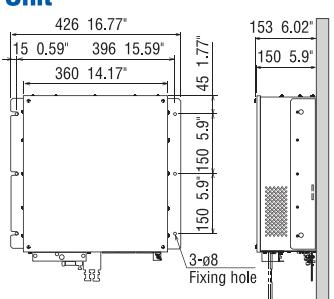
RCU-025 3.1 kg 6.84 lb

**Trackball Control Unit**

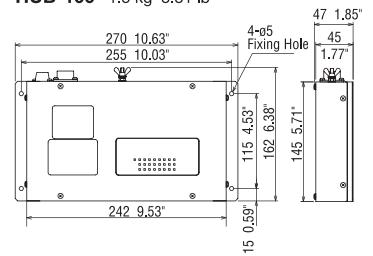
RCU-026 1.5 kg 3.31 lb

**Processor Unit**

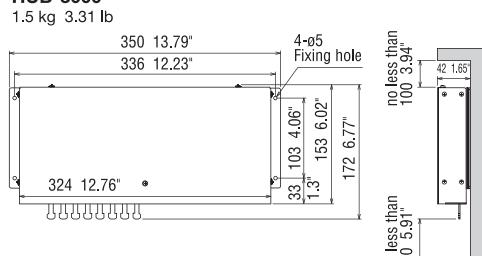
EC-3000
14 kg 30.9 lb

**Switching Hub**

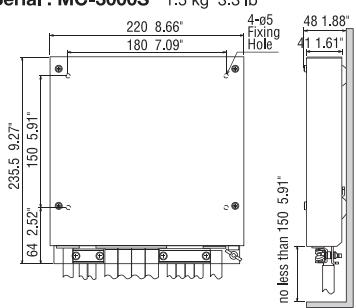
HUB-100 1.5 kg 3.31 lb

**Intelligent Hub**

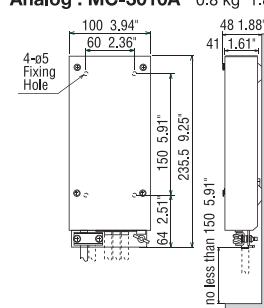
HUB-3000
1.5 kg 3.31 lb

**Sensor Adapter**

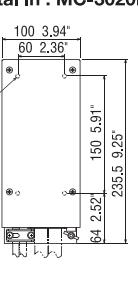
Serial : **MC-3000S** 1.5 kg 3.3 lb



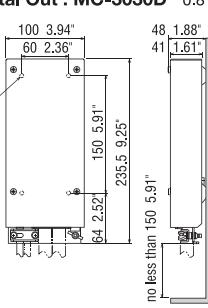
Analog : **MC-3010A** 0.8 kg 1.8 lb



Digital In : **MC-3020D** 0.8 kg 1.76 lb



Digital Out : **MC-3030D** 0.8 kg 1.76 lb



All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.

Nishinomiya, Hyogo, Japan
www.furuno.com

FURUNO U.S.A., INC.

Camas, Washington, U.S.A.
www.furonusa.com

FURUNO (UK) LIMITED

Havant, Hampshire, U.K.
www.furuno.co.uk

FURUNO NORGE A/S

Alesund, Norway
www.furuno.no

FURUNO DANMARK A/S

Hvidovre, Denmark
www.furuno.dk

FURUNO SVERIGE AB

Västra Frölunda, Sweden
www.furuno.se

FURUNO FINLAND OY

Espoo, Finland
www.furuno.fi

FURUNO POLSKA Sp. Z o.o.

Gdynia, Poland
www.furuno.pl

FURUNO DEUTSCHLAND GmbH

Rellingen, Germany
www.furuno.de

FURUNO FRANCE S.A.S.

Bordeaux-Mérignac, France
www.furuno.fr

FURUNO ESPAÑA S.A.

Madrid, Spain
www.furuno.es

FURUNO ITALIA S.r.l.

Genoa, Italy
www.furuno.it

FURUNO HELLAS S.A.

Glyfada, Greece
www.furuno.gr

FURUNO (CYPRUS) LTD

Limassol, Cyprus
www.furuno.com.cy

FURUNO EURUS LLC

St. Petersburg, Russian Federation
www.furuno.ru

FURUNO SHANGHAI CO., LTD.

Shanghai, China
www.furuno.com/cn

FURUNO CHINA CO., LTD.

Hong Kong

FURUNO KOREA CO., LTD.

Busan, Korea

FURUNO SINGAPORE PTE LTD

Singapore
www.furuno.sg