

FURUNO

Marine Electronics Catalog



FURUNO

Those who demand the best recognize Furuno as the penultimate provider of quality marine electronics.

For nearly 80 years, Furuno has continuously reimagined marine electronics, creating innovative solutions with new equipment that delivers exceptional performance and unrivaled simplicity. Whether you're earning your living on the water or simply enjoying the boating lifestyle, you can trust that Furuno is synonymous with quality, performance, and reliability.

Furuno provides the ultimate in navigation ease and safety on the water by manufacturing every piece of equipment to rigorous commercial standards, making each operation more intuitive and every trip more enjoyable than the last. Backed by an unrivaled worldwide network spanning every corner of the globe, Furuno delivers unparalleled service and equipment maintenance wherever you navigate. Our guarantee to provide the highest quality in all our products includes a two-year parts and labor warranty program.


For Furuno, the best is not an option, it's a promise.



Table of Contents

NavNet Series	07
Radar	27
Flex Function Displays	41
GPS/Chart Plotters	43
Fish Finders	49
Sonars	55
Multibeam Sonars	61
Autopilots	65
Instruments/Data Organizers	69
Monitors	71
Remote Displays	73
Satellite Compasses	75
Communications	81
Technical Specifications	89
Recommended Systems	143
Furuno's Global Network	147



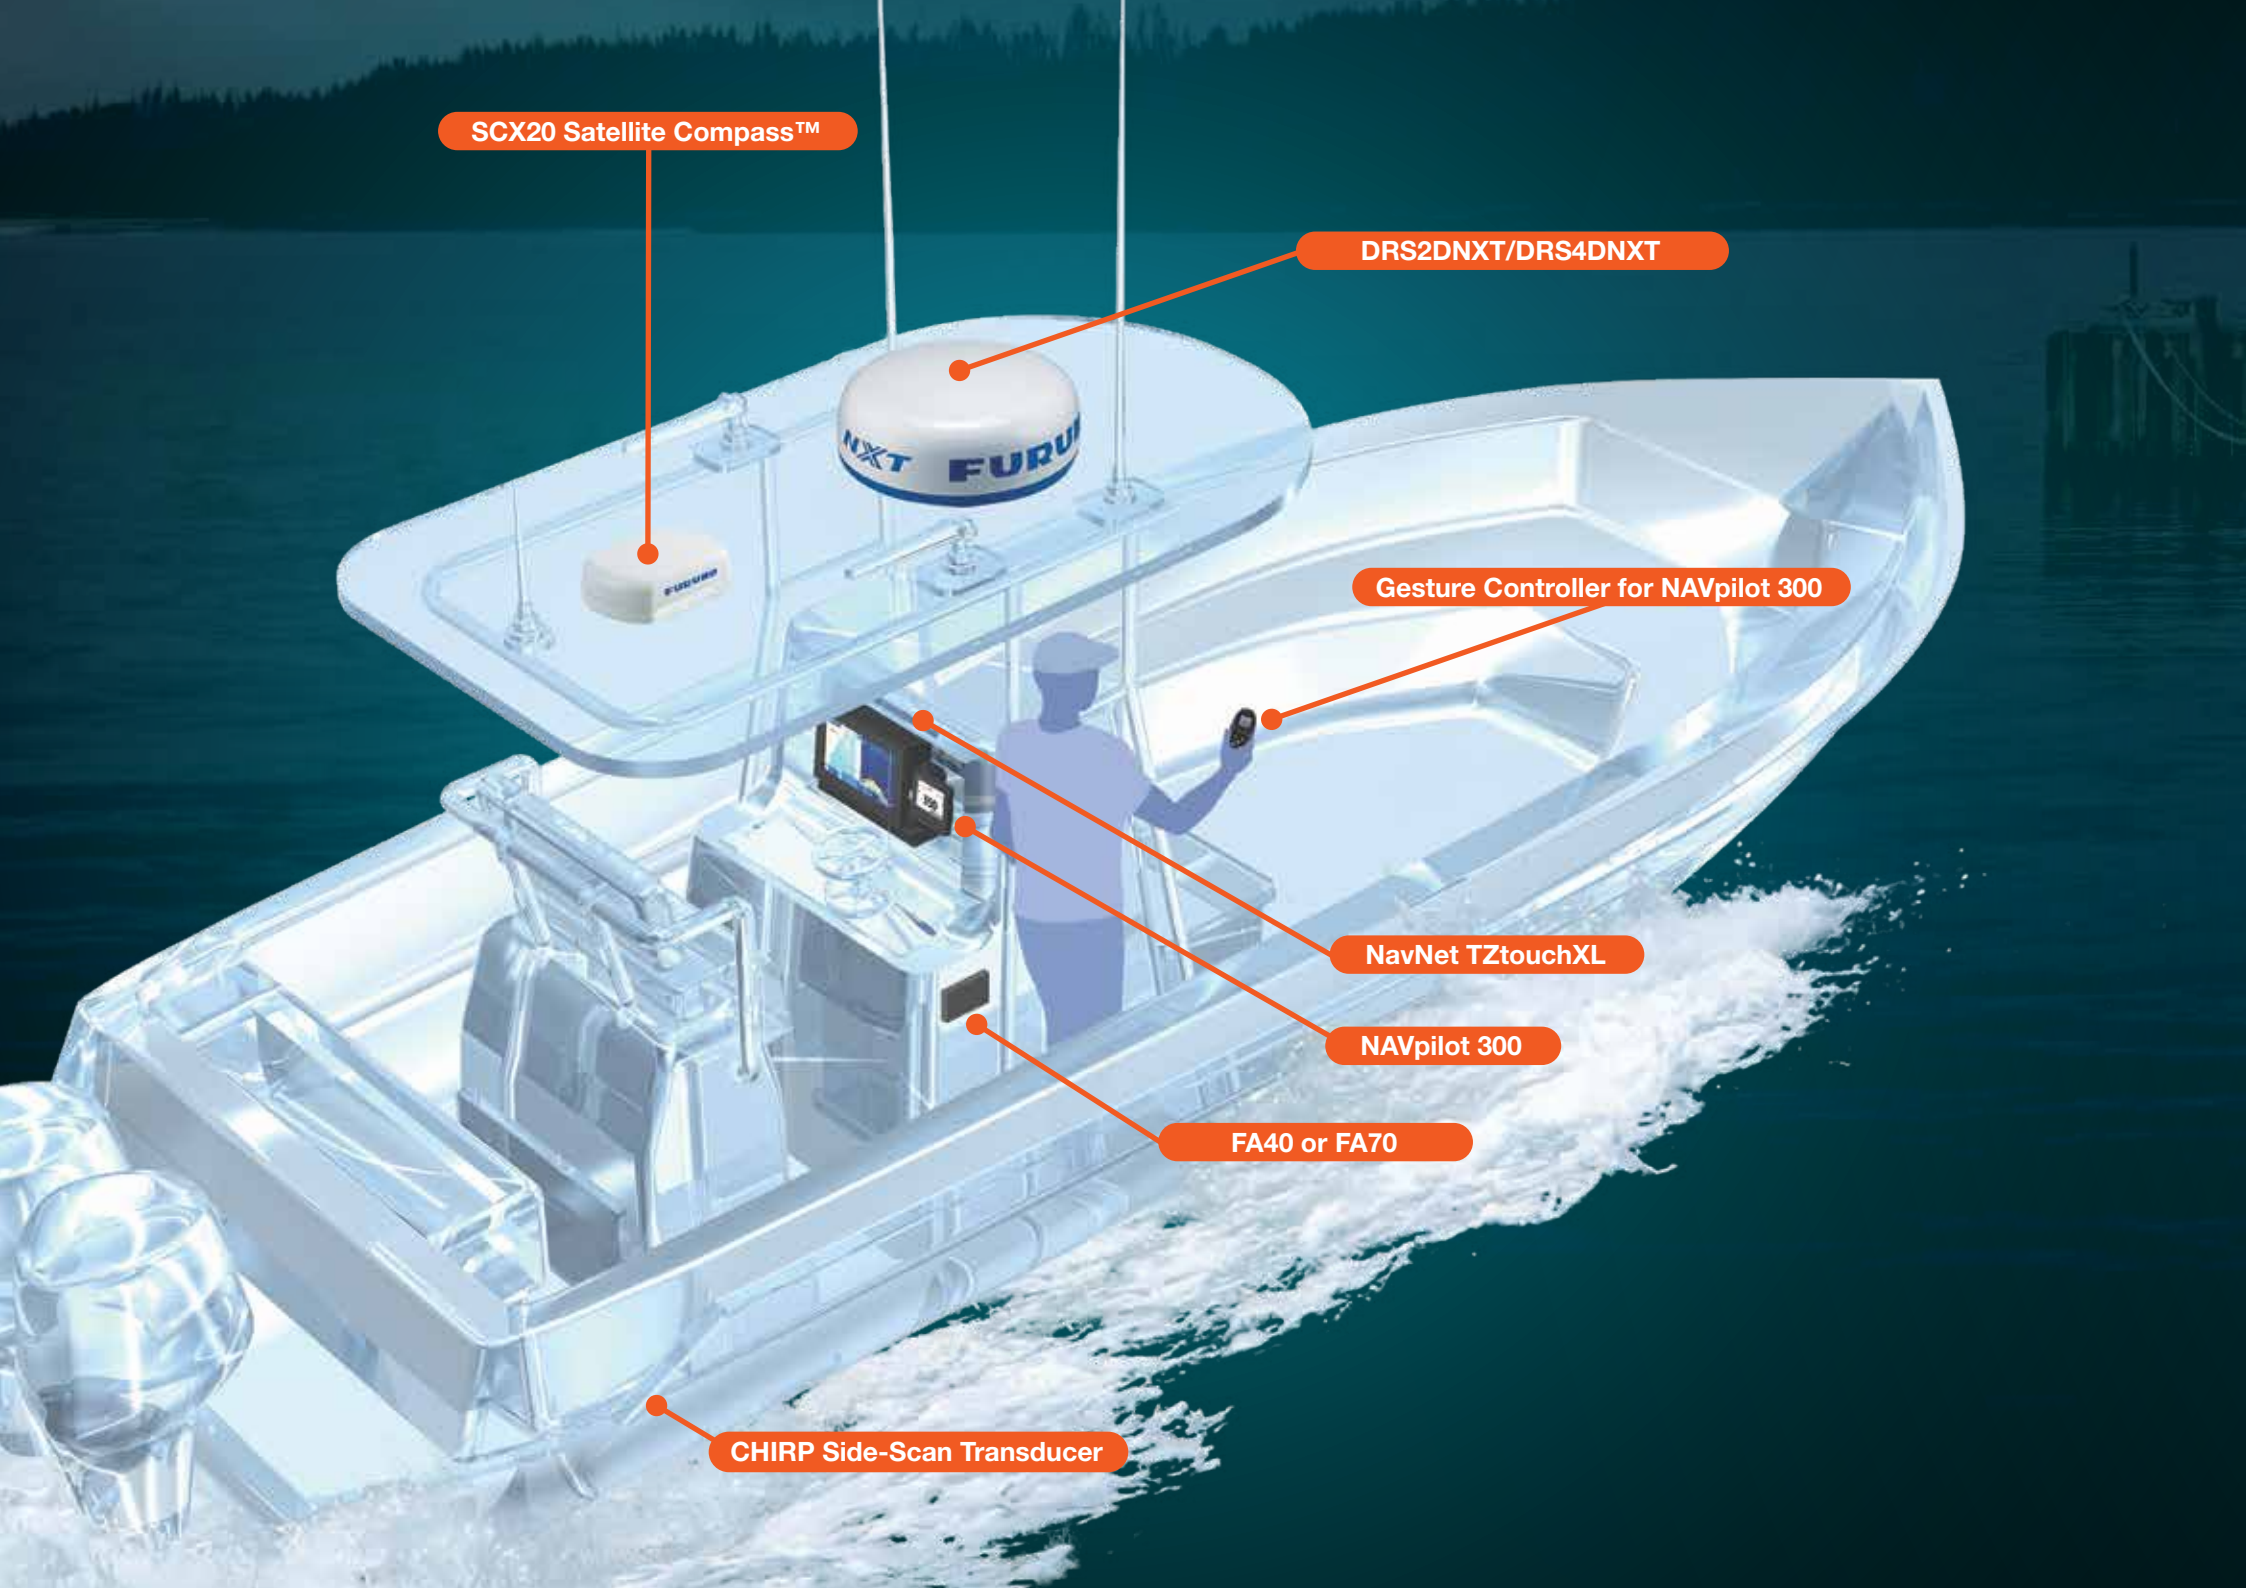

SCX20 Satellite Compass™

DRS2DNXT/DRS4DNXT

Gesture Controller for NAVpilot 300

NavNet TZtouchXL

NAVpilot 300

FA40 or FA70

CHIRP Side-Scan Transducer

Powerful Technology, Compact Design

- NEW Automatic Identification System (AIS) Receiver and Class-B+ AIS Transceiver
- Revolutionary quad-antenna, solid-state Satellite Compass™ for NMEA 2000
- Self-learning, adaptive Autopilot with Gesture Controller
- NEW 10", 13", or 16" TZtouchXL with Built-in Dual Channel* 1 kW TruEcho CHIRP™ Fish Finder, CHIRP Side-Scan**, and GPS Receiver

*TZT10X Single Channel only **CHIRP Side-Scan Transducer required, TZT10X connect via network to display



Satellite Compass™
Model **SCX20**



AIS Receiver
Model **FA40**



Class-B+ AIS Transceiver
Model **FA70**



NAVpilot
Model **NAVpilot 300**



Gesture Controller





Solid-State Radome
Model **DRS2DNXT/
DRS4DNXT**

NEW

NEW


Hybrid Control MFD
with built-in
TruEcho CHIRP™
Fish Finder
Model **TZT10X**

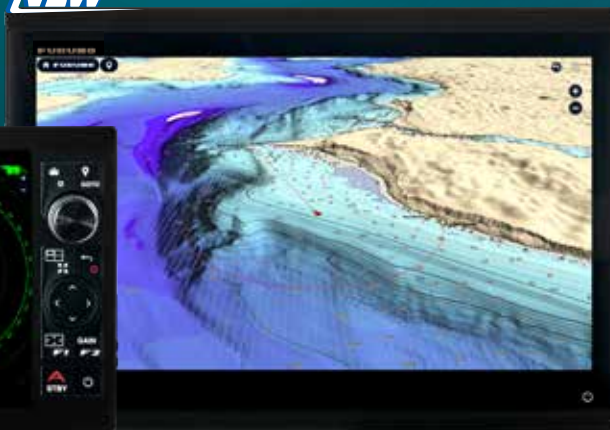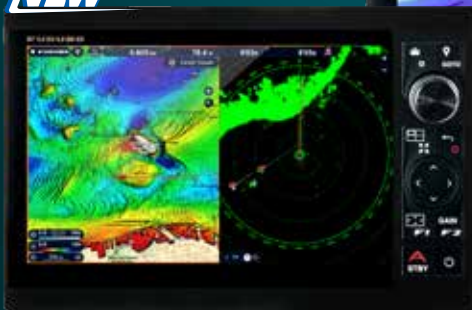

Multi-Touch MFD
with built-in
TruEcho CHIRP™
Fish Finder
Model **TZT16X**

NAVnet

TZ
touchXL

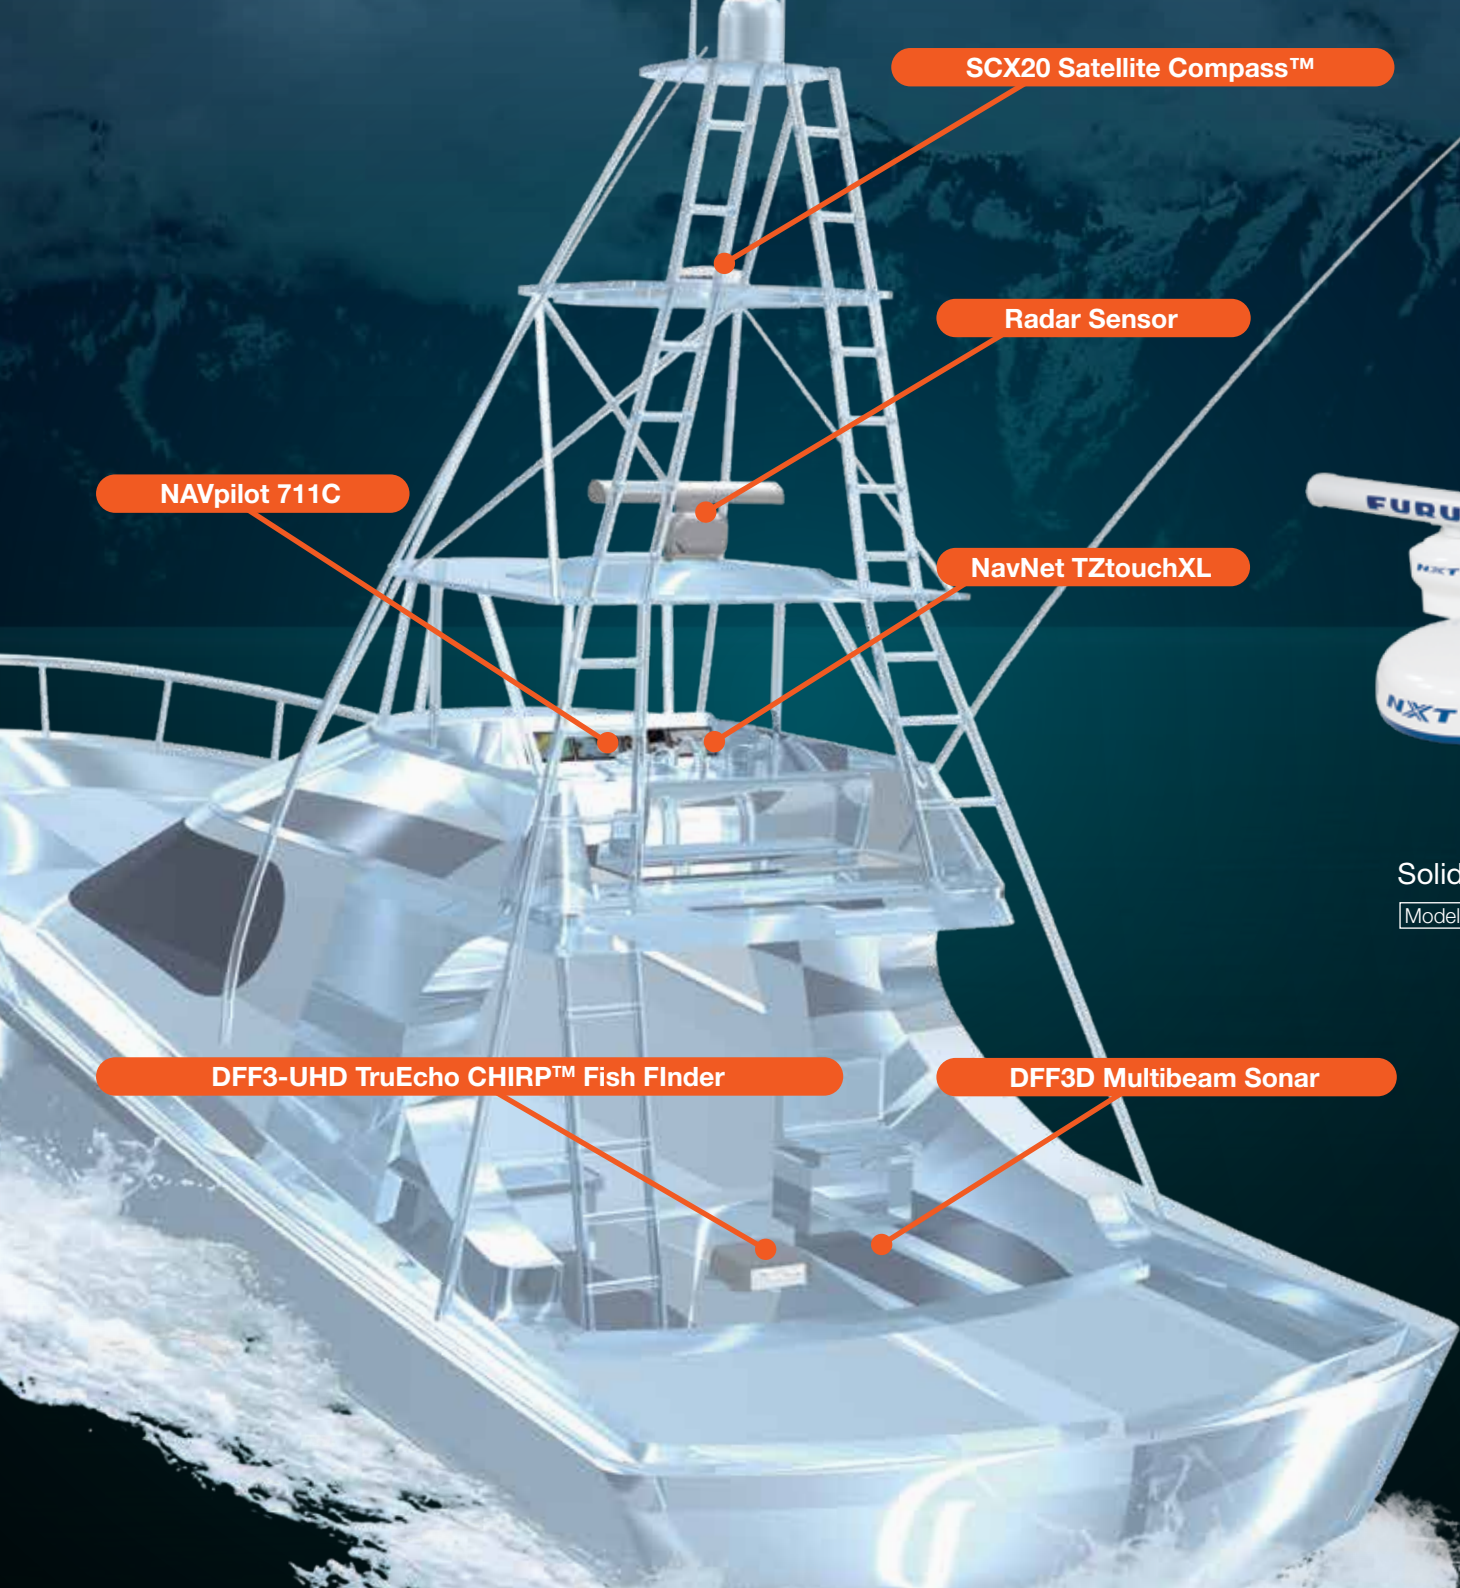

SCX20 Satellite Compass™

Radar Sensor

NAVpilot 711C

NavNet TZtouchXL

DFF3-UHD TruEcho CHIRP™ Fish Finder

DFF3D Multibeam Sonar



Satellite Compass™
Model **SCX20**



Solid-State Doppler Radar
Model **DRS NXT Series**




Radar Sensor
Model **DRS X-Class Series**

Powerful Tools for Powerful Boats

- New Xtra Large 16", 22", and 24" Multi-Touch IPS MFDs
- Built-in Dual Channel 1 kW TruEcho CHIRP™ *
- High-power sensor options - 2/3 kW TruEcho CHIRP™ Network Fish Finder & 100 W or 200 W Solid-State Doppler Radars
- Built-in CHIRP Side-Scan feature, just add CHIRP Side-Scan transducer*

* (TZT16X)


NEW

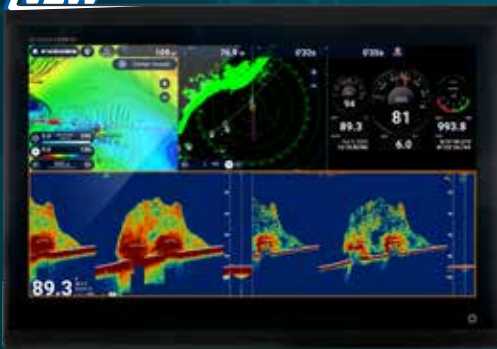

Multi-Touch IPS MFD with built-in TruEcho CHIRP™ Fish Finder

Model **TZT16X**


NEW

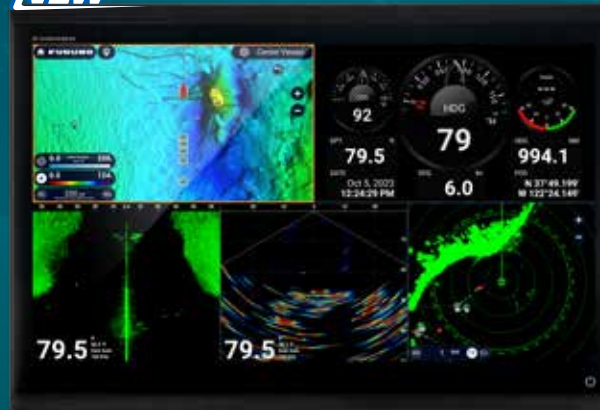

Multi-Touch IPS MFD 22" Display Splits Up To Six Windows

Model **TZT22X**

NEW

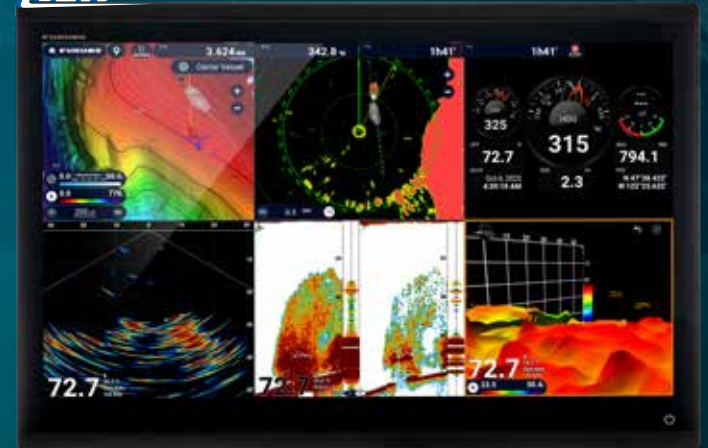

Multi-Touch IPS MFD 24" Display Splits Up To Six Windows

Model **TZT24X**



NAVpilot

Model **NAVpilot 711C**



Black Box Network TruEcho CHIRP™ Fish Finder

Model **DFF3-UHD**




Black Box Network Multibeam Sonar

Model **DFF3D**


NAVnet

TZ
touchXL

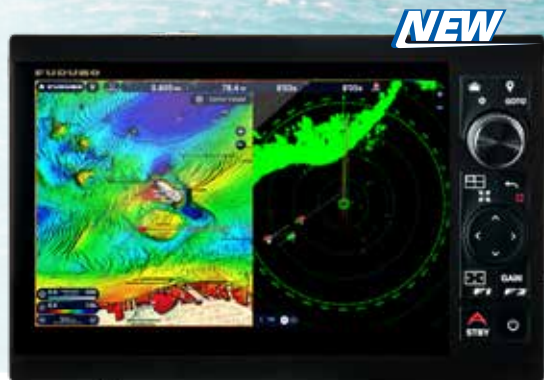


Model TZT10X - 10"

10" Hybrid Control MFD 1920x1200 (WUXGA)
with built-in TruEcho CHIRP™ Fish Finder / Side-Scan

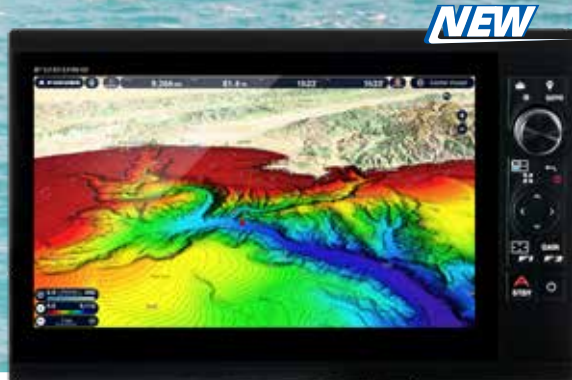

Model TZT13X - 13"

13" Hybrid Control MFD 1920x1080 (FHD)
with built-in TruEcho CHIRP™ Fish Finder / Side-Scan

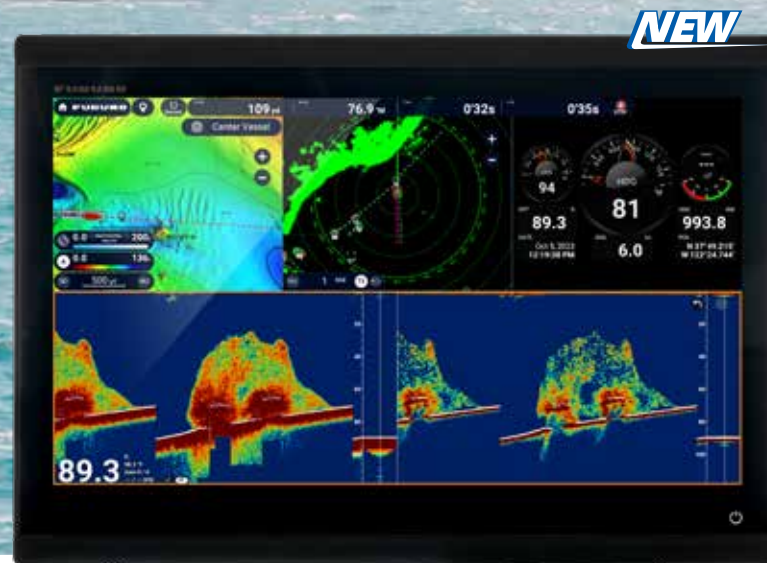

Model TZT16X - 16"

16" Multi Touch MFD 1920x1080 (FHD)
with built-in TruEcho CHIRP™ Fish Finder / Side-Scan

TZtouchXL Multi Function Displays

Explore the future of navigation with NavNet TZtouchXL Multi Function Displays. Extra-large, super-wide 16", 22", and 24" all-glass MFDs with exceptional clarity from all angles that enhance the functionality and style of your helm. Or go with the hybrid controls of the 10" & 13" options that make navigating intuitive and easy under any sea conditions, no matter the size of your vessel. Rest your hand on the RotoKey™ as you crash through the waves and navigate to your charted destination.

The FURUNO flagship series offers new features that help you discover more and make smarter navigation decisions. The redesigned TZ MAPS chart engine provides you with the highest quality maps created from official hydrographic charts worldwide. Plus, they incorporate new BathyVision depth contours and terrain shading with details as fine as 3 in (7.5 cm). Automatically plot your routes with Furuno's intelligent AI Routing. Additionally, get brand-new technologies called Risk Visualizer™ and AI Avoidance Routing when you connect an NXT Radar to not only tell you when a target is dangerous but automatically draw you a route you can take to avoid a collision.


With the blazing fast hexa-core processor in TZtouchXL, you'll have the confidence to scroll, pan, and zoom completely seamlessly. Navigating in a native 3D environment gives you a realistic perspective and an expanded view of the area around your boat, and the all-new TZ MAPS are perfect for planning and navigating routes.

3rd-Party Devices Compatible With NavNet Command Center



NEW

NEW

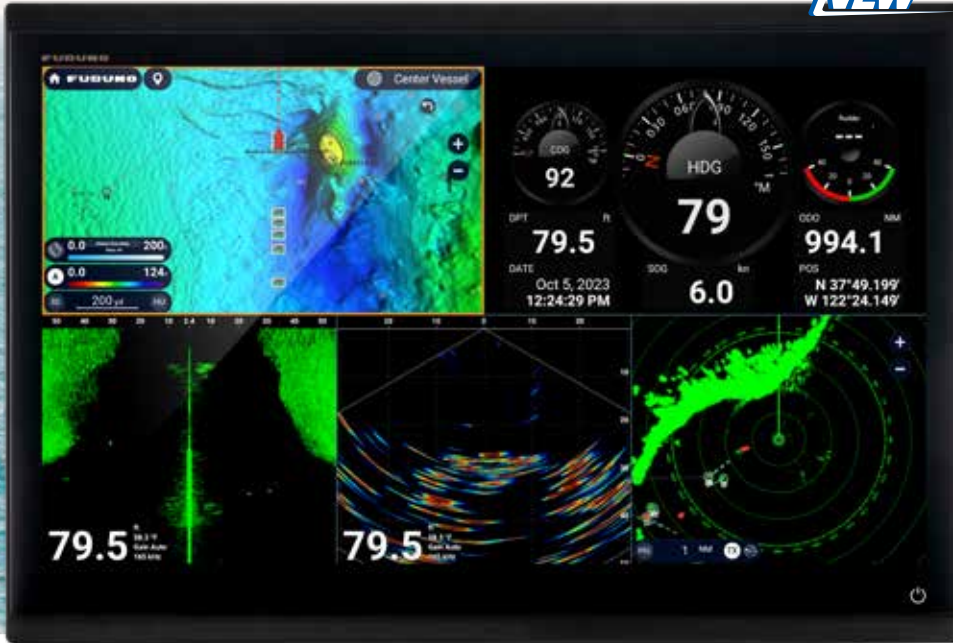

Model TZT22X - 22"


22" Multi Touch MFD 1920x1080 (FHD)

TZtouchXL KEY FEATURES

- New 10" and 13" Hybrid-Control MFDs
- New 16", 22", and 24" All-Glass IPS MFDs
- Ultra-sharp full HD Multi Touch with simplified yet powerful User Interface
- 10 Screen layouts, including 6-way split screen (TZT10X/13X/16X/22X/24X)
- New AI Routing™ utilizes chart info such as water depth and channels to create a suggested route
- New Risk Visualizer™ shows potential collision based on the current position and movement of surrounding vessels*



* Requires connection to DRS NXT Radar

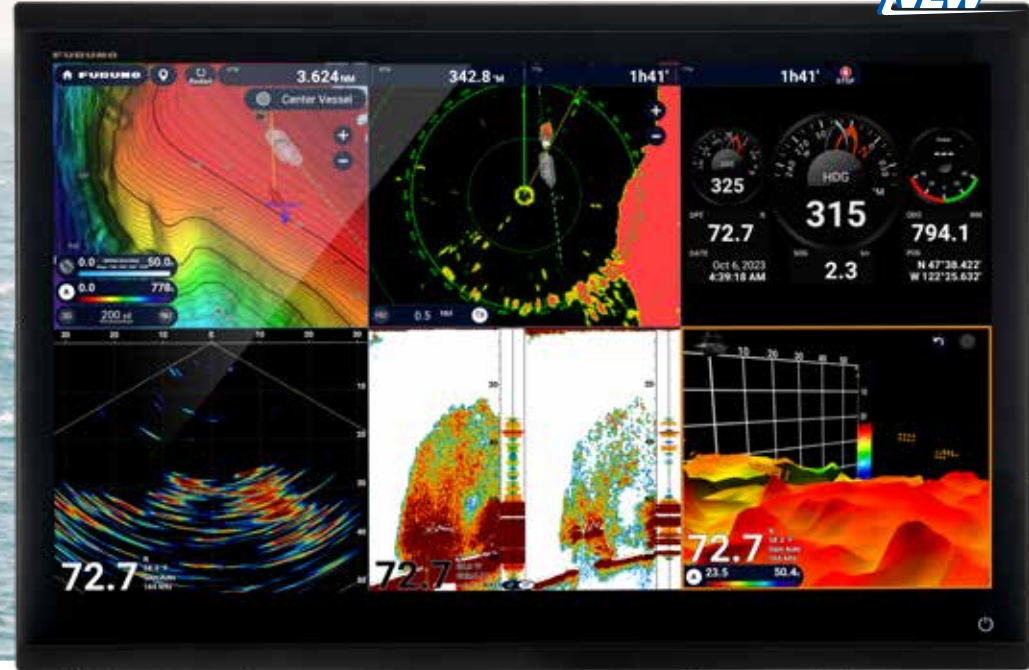

Model TZT24X - 24"

▶▶▶ Spec P88



24" Multi Touch MFD 1920x1080 (FHD)

- New Collision Avoidance Routing automatically calculates a safe route based on the current position and movement of surrounding vessels to avoid a collision*
- Built-in TruEcho CHIRP™ or CW Fish Finder (TZT10X/13X/16X)
- Built-in CHIRP Side-Scan (TZT10X/13X/16X)
- Improved auto gain optimizes performance at all ranges
- All-new TZ MAPS cartography with a modern yet familiar feel
- Simple mounting options, including low profile flush-mount, or edge-to-edge flat mount for a sophisticated all-glass appearance
- Easily connect a variety of sensors through Ethernet or NMEA2000, including Radar, Fish Finder, Multibeam Sonar, Autopilot, Satellite Compass™, and more
- Sync up a variety of data with smartphone or tablet
- Connect a wide range of remote controllers
- NavNet Command Center integrates 3rd-party devices using a built-in HTML browser

Maps That Get Better Everyday: Vector or Raster?

Thanks to our agreements with many hydrographic offices around the world, TZ MAPS offers coverage for Europe, North America, the Caribbean, & the Pacific. Each zone includes both vector data and raster maps (scanned and georeferenced paper maps). Plus, with our new color palettes, you can now make your vector charts look like traditional raster charts as seen below.

- Make vector charts look identical to raster paper charts
- Free 1-year chart updates
- Detailed land information
- Community Edit & POI
- 8 different color palettes
- Subscription updates available after first year
- Use your TZ MAPS across multiple MFDs, TimeZero software, or TZ iBoat app
- High-resolution satellite photos

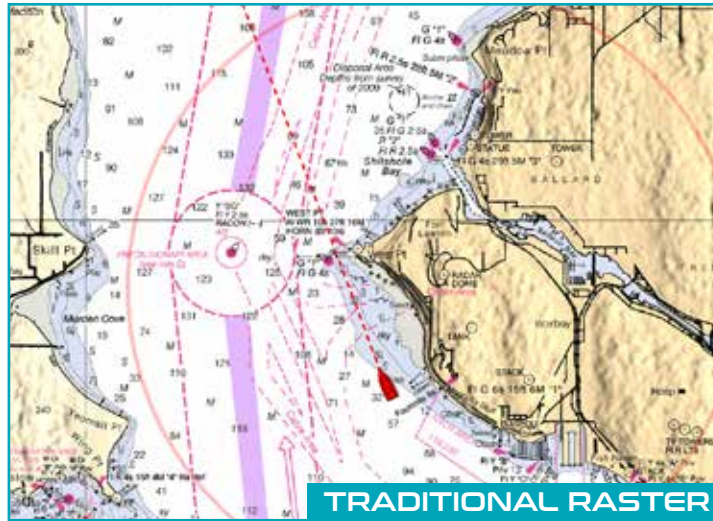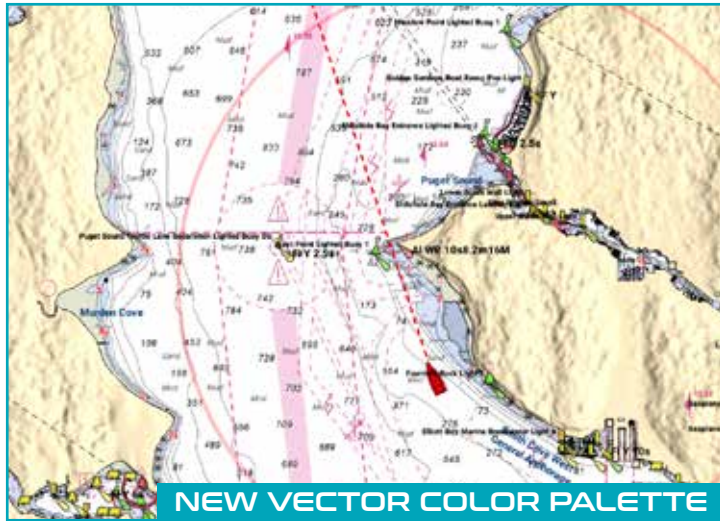



Dynamic Fishing Maps

- Choose the amount of contour lines with a single tap
- 5 levels of contours down to within 3 in (7.5 cm)
- Add dynamic color shading based on your custom settings
- Adjust terrain shading to add as much topography as desired for high resolution depth shading
- Combined depth shading plus fishing charts

BathyVision... Reveal The Secrets Of The Seabed Like Never Before

The seabed holds many secrets! However, thanks to the advanced functionality and highly detailed information provided by our all-new BathyVision, those secrets of the seabed will be revealed!

TZ MAPS offer the best bottom data available and BathyVision lets you display dynamic & intuitive high-resolution relief shading in color and/or with contour lines. It is possible to configure the density of contour lines to about 3 in (7.5 cm) & associated shading to focus precisely on high-potential fishing areas.

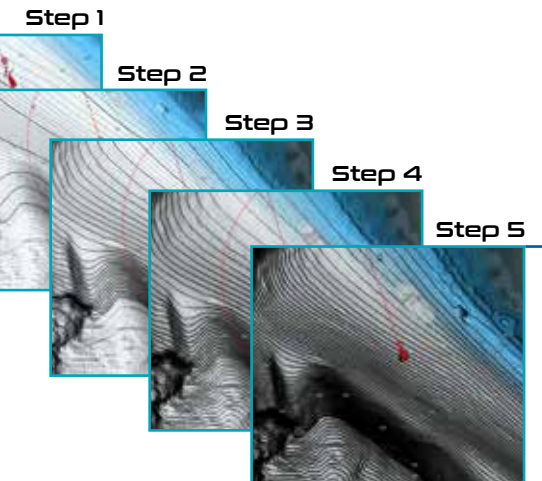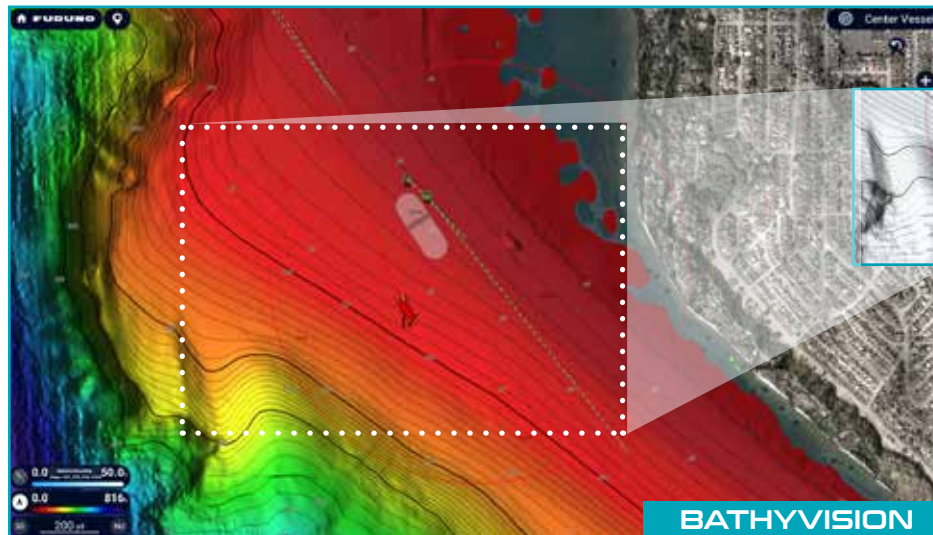

TZ MAPS: An All-New Chart Engine Providing Game-Changing Safety Technology...

NEW Community Maps (Coming Soon)

- Users create or edit vector chart objects
- Works online or offline (cached)
- Upload photos, comments, and ratings



NEW AI Routing

- New AI algorithm analyzes nautical chart elements: water depths, channels, and the recommended routes to ensure seamless & secure navigation
- Swift & precise solution for planning your next voyage
- Calculate the optimal route in seconds



NEW Risk Visualizer

The new Risk Visualizer™ shows potential collision areas based on the current position and movement of all surrounding vessels.

- Quick and intuitive read on potentially dangerous targets
- Color-coded alerts for collision
Green = Normal / Red = Hazardous



NEW AI Avoidance Route*

- Uses a proprietary AI Routing algorithm to automatically calculate the best routes for safety

* Requires DRS-NXT Radar Sensor

Collision w/ Target

High Collision Risk

Recommended AI Avoidance Route to avoid a collision



Standard



International (S-52 std)



Sunlight



French HO (SHOM)



Canadian HO (CHS)




NOAA



Explorer



Cruise

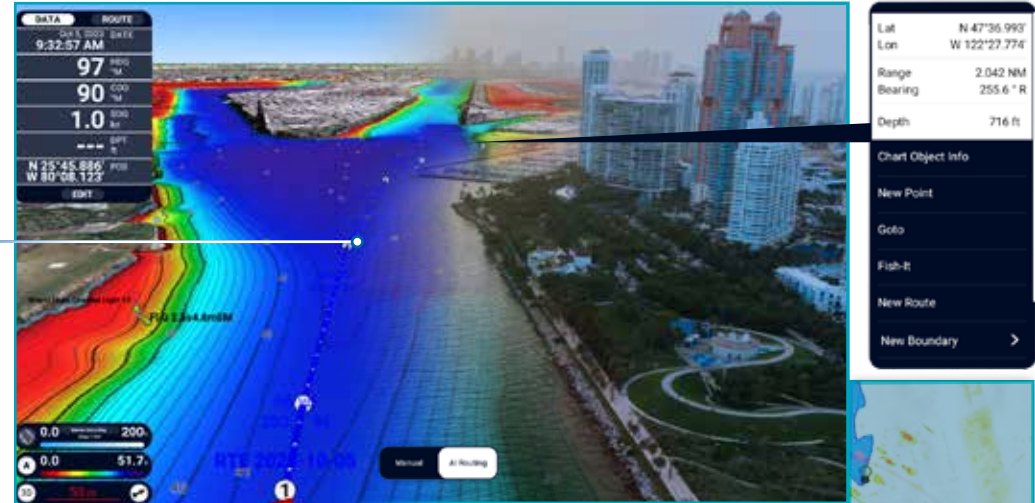

NavNet Series

NAVnet TZ3 touch




Model TZT9F - 9"

9" Hybrid Control MFD 1280x720 (HD)
with built-in TruEcho CHIRP™ Fish Finder


Model TZT12F - 12"

12" Hybrid Control MFD 1280x800 (WXGA)
with built-in TruEcho CHIRP™ Fish Finder

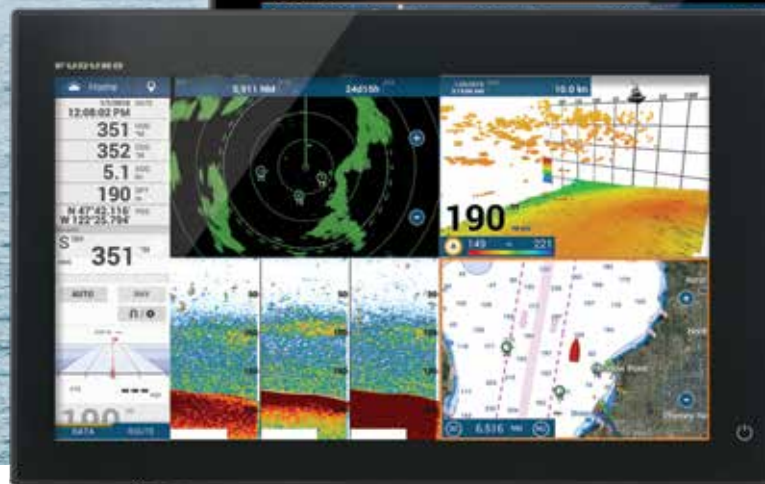

Model TZT16F - 16"

16" Multi Touch MFD 1920x1080 (FHD)
with built-in TruEcho CHIRP™ Fish Finder

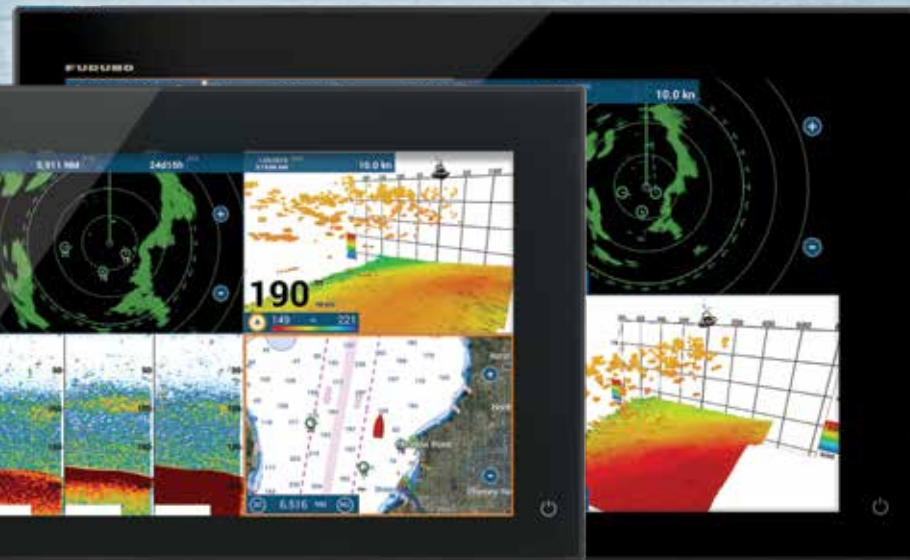


Model TZT19F - 19"

19" Multi Touch MFD 1920x1080 (FHD)
with built-in TruEcho CHIRP™ Fish Finder

▶▶▶ Spec P91

TZtouch3 KEY FEATURES

- CHIRP Side-Scan: see up to 750 ft (228 m) to each side
- Follow-It: Uses PBG data to create a constant depth route for NAVpilot to follow*
(*Requires contour data from DFF3D)
- DFF3-UHD high-power 2/3 kW TruEcho CHIRP™ / Max depth scales to over 15,000 ft (4,500 m)
- Fish-It and Drift-It: save time, fuel, and increase fish catch
- True Dual-Channel 1kW TruEcho CHIRP™ Fish Finder**
(**TZT12F/16F/19F only, TZT9F Single-Channel only)
- Internal GPS receiver* (*TZT19F utilizes an external GPS receiver)
- Quad-Core CPU
- Compatible with CZone digital switching
- NavNet Command Center integrates 3rd-Party devices using a built-in HTML browser
- Can wirelessly download up to two weeks of weather data with an internet connection

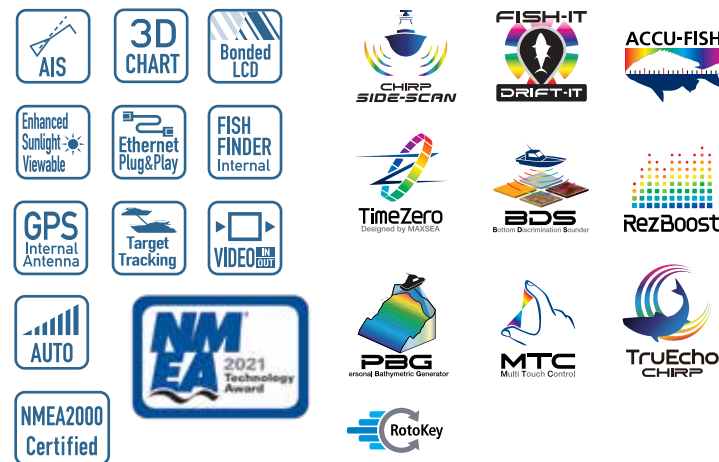

REMOTE OPTIONS

TZtouchXL, TZtouch3, & TZT2BB



Model TZT2BB

MFD Black Box
1920 x 1080 (16:9),
1280 x 1024 (5:4),
1024 x 768 (4:3)

▶▶▶ Spec P91

Multi Touch Marine Display* with TZT2BB Processor Unit (Model MPU004) and Control Unit** (Model MCU005)
*Local supply **Option

TZT2BB KEY FEATURES

- Internal RezBoost™ Fish Finder, with NEW Sunlight color palette
- PBG (Personal Bathymetric Generator), Fish-It/Drift-It, Follow-It, Marker Zoom, and more!*
- Full HD HDMI video input available
- Video Converter Kits stream compatible Sonar video data directly to TZT2BB
- Compatible with CZone Digital Switching
- Fast processor (CPU) for impressive performance
- Seamless, smooth chart operation with TimeZero™ Technology
- Enhanced touch gestures like edge swiping for frequently used functions
(* Optional sensors required)

Model MCU002 Remote Control Unit



Model MCU004 Remote Control Unit



Model MCU006 Control Unit

NEW



Model MCU006H Control Unit

NEW



- Available in vertical (MCU006) & horizontal (MCU006H) configurations
- 10 dual-purpose keys + a large RotoKey joystick
- Edge Swipe control
- Control of every NavNet TZtouchXL, or TZtouch3 in the network

Model MCU005 Control Unit (option)



Model TEU001B / TEU001S Touch Encoder Unit (option)

Black Design

Silver Design



- The GUI has been renewed and refined, focusing on usability and ease of operation
- Independent display and operation of dual screens with built-in dual CPU
- Add Autopilot, Instruments, Radar, AIS, & other sensors to your NavNet network
- Connect up to 5 NavNet TZT3/TZT2 displays on one network (with v8.01 TZT2 software or higher)
- Wirelessly download up to two weeks of weather data with an internet connection
- Tablet & smartphone apps: NavNet Remote, NavNet Viewer & NavNet Controller for your iOS and Android™ devices
- Manual Fuel Management enables visual evaluation of fuel levels and consumption
- NavNet Command Center for TZT2BB integrates 3rd Party Apps through a built-in browser

Plot Your Adventure With Confidence

TZ First Mate Keeps Track of Your Catch & Location

When you're out on the water, you want to be on top of your game. So, you train like the professionals. You prepare all of your equipment. And before you head out, you do your homework. The good news is TZtouchXL & TZtouch3 just made it all easier with TZ Cloud and the TZ First Mate App.

See page 22 for more details.



MapMedia Vector & Raster Chart Library

Freely choose the charts that fit your individual needs. Easily select either raster, vector or fishing charts. MapMedia brings an authentic vector and raster chart library to your NavNet TZtouch3. "C-MAP" vector cartography are optional world-wide charts that can be easily purchased and unlocked. MapMedia cartography integrates cutting edge algorithms with high resolution image processing techniques to deliver a fusion of digital navigation charts and satellite photography. Free NOAA raster and vector charts are available for the U.S. only.



Raster Charts



Vector Charts

TZ Cloud: Never Lose Waypoints or Routes Again

Create your routes at home using TZ Navigator, a web browser*, or TZ iBoat iOS App, then retrieve them from the cloud & download to your TZtouchXL & TZtouch3. Also, create events on your MFD and retrieve them at home because the data is synchronized automatically & securely to My TIMEZERO. TZ Cloud also stores marks, routes, boundaries, photos, and catch data! (*cloud.mytimezero.com raster planning charts for US only)



Satellite PhotoFusion™ & CMOR Charts (U.S. only)

Satellite photography is included in the MapMedia raster and vector charts, simply called Satellite PhotoFusion™. Land areas (zero depth) are completely opaque, displayed as satellite photos on the chart. As the depth increases, the satellite image is merged with the chart data to provide you with added detail on seabed areas in shallow water without losing vital chart information. Satellite PhotoFusion™ is an optional feature designed to work exclusively with Furuno.

CMOR's high-resolution, shaded-relief bathymetric bottom images help navigators identify suitable locations for fishing and diving. (CMOR available in U.S. only)




Satellite PhotoFusion™



CMOR Charts

Powerful Additions To Boost Your Catch

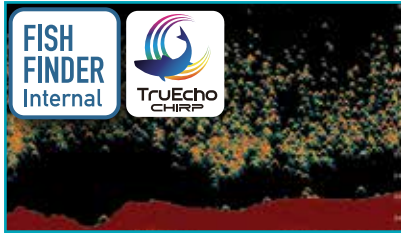

Find More Fish With TruEcho CHIRP™

TZtouchXL & TZtouch3's internal 1 kW TruEcho CHIRP™ Fish Finder is designed to operate across a wide range of frequencies utilizing a broadband transducer, delivering significant advantages to signal clarity & target definition. For deep water there are two options. The 2 kW/3 kW DFF3-UHD TruEcho CHIRP™ Fish Finder for entire TZtouchXL & TZtouch3 lines, or the DI-FFAMP for TZT12F/16F/19F. Both get you down to 9,800 feet while improved auto gain optimizes performance at all ranges.


Drift-It, Fish-It... Catch-It!

The Fish-It & Drift-It features help you locate the correct spot to start your drift so you'll pass right over your fishing point. Tapping on a location on the chart, Fish Finder, or DFF3D creates a temporary "fishing go-to point" with dynamic range rings, a course line between the point and the boat, and a temporary track line. Now activate Drift-It to automatically create a starting point for the vessel to drift directly over your Fish-It spot. Select a 3-minute, 5-minute, or even a 20-minute drift, navigate to the starting point, and drift to the Fish-It location in the time selected.



CHIRP Side-Scan is built-in to TZtouchXL & TZtouch3



Furuno's CHIRP Side-Scan for NavNet TZtouchXL & TZtouch3 scans both port and starboard, allowing boaters to see the shape of bottom structure in high definition. CHIRP Side-Scan reveals the shape of fish targets and fish-hoarding structure up to 750 ft (200 m) off each side of your vessel. It's ideal for fishing or simply showing hidden, uncharted bottom structure in rich detail in 1/4, 1/2, or full-screen presentations on NavNet TZtouchXL & TZtouch3 with internal Fish Finders (excludes TZT9F). Available with Thru-hull, Paired, or Transom Mount Transducer.

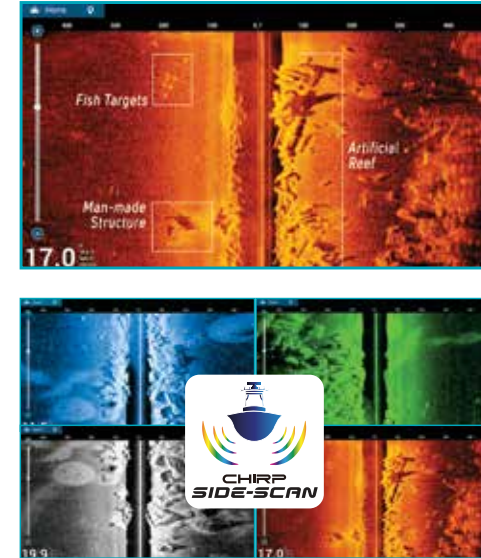

(Software ver. 3.50 or higher required for TZtouch3; ver. 9.50 or higher required for TZT2BB. CHIRP Side-Scan can be displayed on TZT2BB, TZT9F, TZT22X, and TZT24X when networked to a TZT10X, TZT13X, TZT16X, TZT12F, TZT16F, or TZT19F.)

Use DFF3D With Your Fish Finder

This powerful combination helps you get on the fish like never before. Use your standard Fish Finder on low-frequency to go deep. Then use the DFF3D for your high-frequency to see fish in the water column. With the 3D History and Triple Beam Modes, you can easily see which side of the boat the fish are located, so you know where to drop your line.

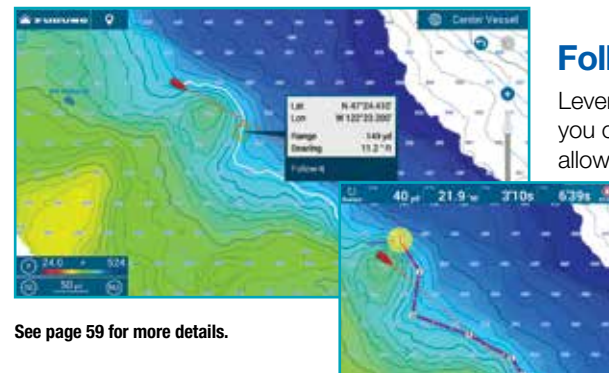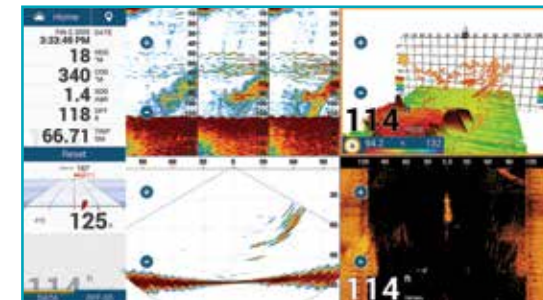

See page 59 for more details.

Follow-It Feature

Leverage your recorded PBG data like never before. Now you can create a constant depth route from the PBG data, allowing you to select Follow-It from the menu and send it to your NAVpilot Autopilot. Then the NAVpilot will automatically follow the depth route all the way around a ridge or trough. This is particularly useful when you want to keep your bait at a certain depth while trolling without having to adjust your reel.

(Software ver. 3.5 or higher required for TZtouch3; ver. 9.5 or higher required for TZT2BB.)

NavNet Series



Model DRS2DNXT / Model DRS4DNXT



Model DRS6ANXT



Model DRS12ANXT



Model DRS25ANXT

Solid-State Radar



KEY FEATURES

- Solid-State pulse compression Doppler Radar with no preheating time and low energy consumption (no magnetron)
- Revolutionary Target Analyzer™ function instantly identifies hazardous targets
- Acquire up to 100 targets with Fast Target Tracking, Auto Target Acquire, and manual selections
- RezBoost™ beam sharpening to increase resolution
- Effective horizontal beam width* can reach 0.7° with DRS6A/12A/25ANXT (XN13A), 2.0° with DRS4DNXT, and 2.6° with DRS2DNXT
- Bird Mode to find the best fishing grounds by tracking birds
- Simple installation, external PSU is not required
- Smart-connector cable for simplified cable installations

* when using RezBoost™

DOMES	OPEN ARRAYS - 3.5', 4', OR 6'		
DRS2DNXT/DRS4DNXT	DRS6ANXT	DRS12ANXT	DRS25ANXT



2008-2014,
2016, 2018-2023

Model DRS2D/4DNXT

NXT Radome

▶▶ Spec P96


Model DRS6A/12A/25ANXT

NXT Radar Array

▶▶▶ Spec P96


Spot Hazardous Targets Instantly

The NXT series are the first Radars in the world to use Furuno's exclusive Target Analyzer™ function. Targets approaching your vessel automatically change color to help you identify potentially dangerous targets. Green echoes are stationary targets or moving away from you, while red echoes are hazardous targets moving toward your vessel. Echoes dynamically change color as targets approach or get farther away from your vessel.

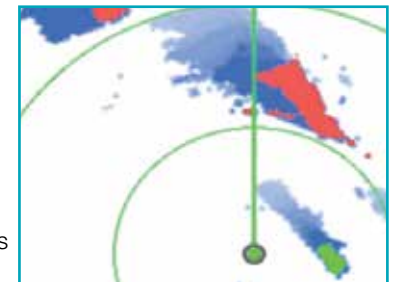

RezBoost™ Beam Sharpening

Furuno's exclusive RezBoost™ technology has been incorporated into our Radar units for enhanced resolution and impressive performance.

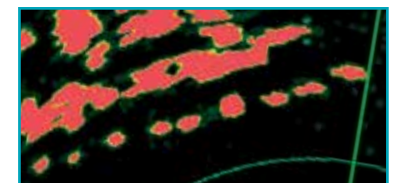



Model DRS4DL+


Compact Radome >>> Spec P97

Model DRS6AX/12AX/25AX

X-Class Radar Array >>> Spec P97

Bird Mode

The DRS X-Class and NXT Series feature a Bird Mode that helps you identify birds congregating around schools of fish near the sea surface. Bird Mode works by automatically adjusting the gain and sea settings for optimal visibility.

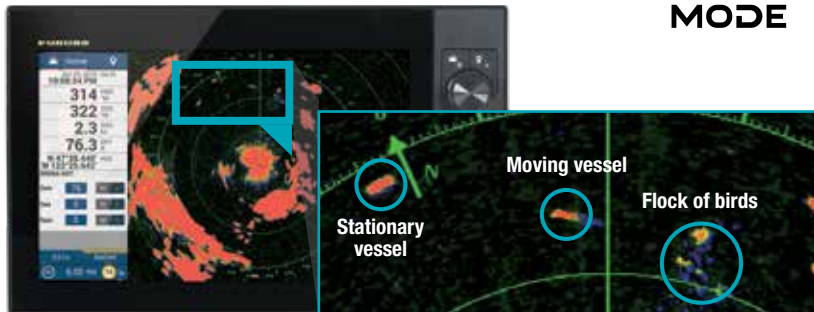

X-Class (Magnetron) Radar



KEY FEATURES

- Digital Signal Processing enhances short and long range detection
 - Dual range scanning for two different Radar ranges
 - Enhanced auto gain anti-clutter controls and auto tuning
 - Bird Mode helps you identify birds, automatically adjusting the gain & sea for optimal detection
 - Fast Target Tracking takes only seconds for a speed and course vector to be displayed
 - Advanced side lobe reduction technology
 - Spot-on Radar-Chart Overlay on both 2D and 3D chart presentations*
 - AIS overlay "AIS-over-Radar" presentation for precise vessel tracking*
 - Radar Guard Zone and Watchman features alert you to potential dangers
 - VRM (Variable Range Marker) & EBL (Electronic Bearing Line) give distance & bearing indications
- * Appropriate sensor required

DOME	OPEN ARRAYS - 3.5', 4', OR 6'		
DRS4DL+ X-Class	DRS6AX X-Class	DRS12AX X-Class	DRS25AX X-Class

High Power TruEcho CHIRP™



Deep Impact - DI-FFAMP

DFF3-UHD

Model DI-FFAMP

▶▶▶ Spec P95

Deep Impact TruEcho CHIRP™ Amp

Model DFF3-UHD

▶▶▶ Spec P94


Black Box Network - High Power TruEcho CHIRP™ Fish Finder

SPECIFICATIONS:

Model	DI-FFAMP	DFF3-UHD
Frequency	26.6 to 242 kHz	25 to 242 kHz
Output Power (kW)	2 kW/3 kW	2 kW/3 kW
Range Scale	Up to 9,800 ft	Up to 9,800 ft
ACCU-FISH™	N/A	N/A
Bottom Discrimination	N/A	N/A

Go Deeper With More Power Than Thought Possible

You spoke. We listened. And now we delivered! TZtouchXL & TZtouch3 incorporates a powerful internal 1 kW TruEcho CHIRP™ Fish Finder. For many, this is the perfect Fish Finder, but for some, they need more power. So, we proudly bring you two deep water, high-power Fish Finders for TZtouchXL, TZtouch3, and TZT2BB. The DFF3-UHD* is a high-power 2 kW/3 kW TruEcho CHIRP™ Network Fish Finder that plugs directly into your Ethernet network, giving you the power you need to reach those deep water fish. Deep Impact** (DI-FFAMP), is a high-powered 2 kW/3 kW amplifier that connects to the internal TruEcho CHIRP™ Fish Finder. But if that's not enough, Deep Impact gives you 5 kW/10 kW with the right booster (BT-5 Booster). Go big or go home!

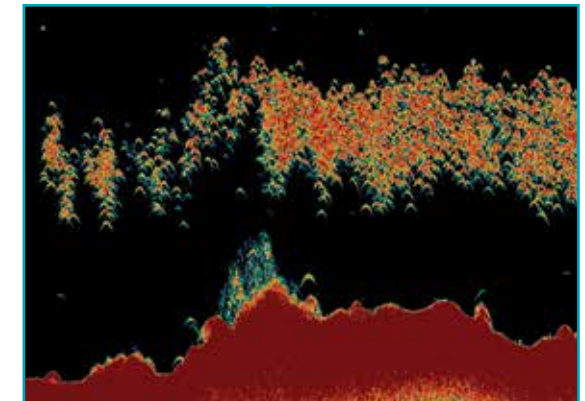


*DFF3-UHD can be connected to TZTXL, TZT3 & TZT2BB.

**DI-FFAMP can be connected directly to TZT12F/16F/19F. To use a TZT9F with the DI-FFAMP, it must be connected to a network with one of the aforementioned MFDs.



Multibeam Sonar

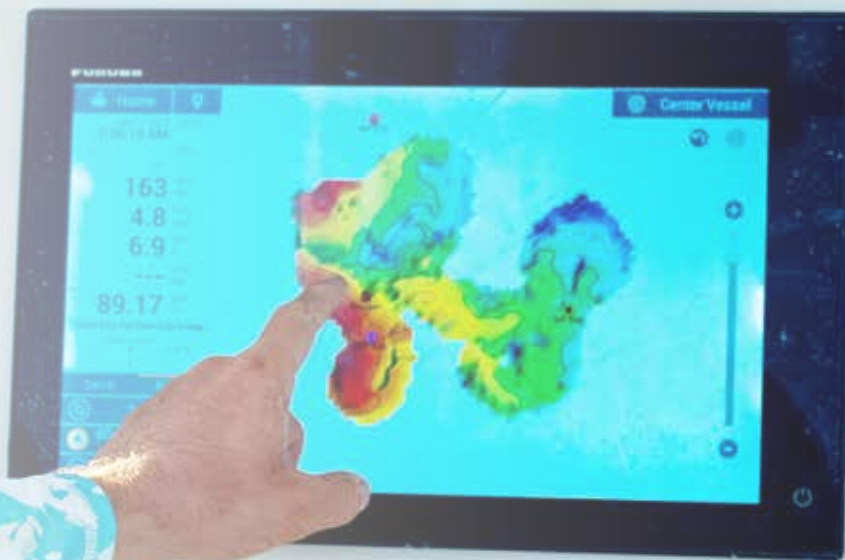

Model DFF3D

▶▶▶ Spec P95

Black Box Network Multibeam Sonar

KEY FEATURES:

DFF3D Multibeam Sonar	
Frequency	165 kHz
Range Scale	Up to 3,900 ft
Detection Range	650 ft* (Side beam best performance) 980 ft* (Main beam directly under boat)
ACCU-FISH	N/A
Bottom Discrimination	N/A
Transducer	800 W

* Depending on bottom type and water conditions



2017/2018/2019



Find the Fishing Spots Others Have Missed


The Multibeam Sonar gives you real-time 120° port-starboard view of the water column and seabed up to 650 ft (200 m) depth*. The DFF3D allows you to explore fishing spots and find fish in deep water far faster than conventional single beam sounders. The main beam penetrates right under the boat at a depth of approximately 980 ft*. See page 59 for more details!

* Maximum depth depending on installation, bottom type and water conditions.


PBG (Personal Bathymetric Generator)

Discover new fishing hot spots and save them to the cloud so you can return again and again! Bottom images are drawn with shaded relief, depth contours, and variable colors, making it easy to identify hidden structure and ridges that hold fish in a simple, easy-to-interpret presentation. Multiple color palettes are available, including the ability to show contour lines only. The area each ping covers is approximately twice the depth at the time of recording, so at a depth of 100 ft, a 200 foot-wide area is displayed and recorded to your NavNet TZtouchXL & TZtouch3 MFD.

See page 59 for more details on the DFF3D.

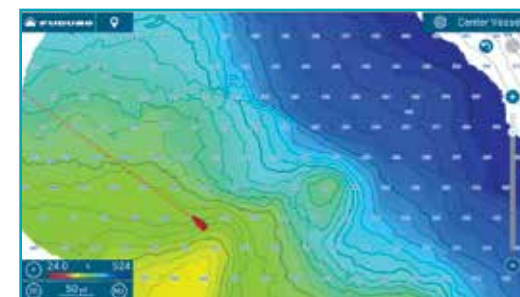

PBG spot soundings clearly shows depth numbers

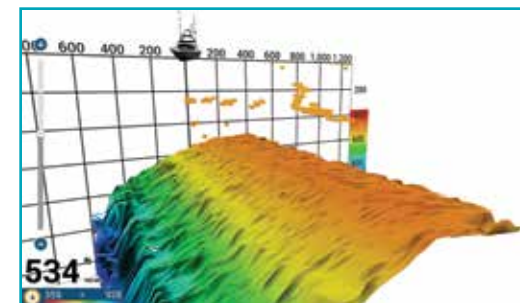

Digital Fish Finders



Model DFF1-UHD

▶▶▶ Spec P94

**Black Box Network
TruEcho CHIRP™ Fish Finder**

KEY FEATURES:

DFF1-UHD	
Frequency	Dual Frequency 30-70 kHz and 175-225 kHz
Range Scale	Up to 3,900 ft
Broadband	Available
ACCU-FISH™	Available
Bottom Discrimination*	Available
Transducer	1 kW

* Bottom Discrimination transducer required



Model BBDS1

▶▶▶ Spec P94

**Black Box Network
Bottom Discrimination Fish Finder**

KEY FEATURES:

BBDS1	
Frequency	Dual Frequency 50/200 kHz
Range Scale	Up to 3,900 ft
ACCU-FISH™*	Available
Bottom Discrimination*	Available
Transducer	600 W/1 kW

* Bottom Discrimination transducer required



Model DFF3

▶▶▶ Spec P94

**Black Box Network
High-Power Fish Finder**

KEY FEATURES:

DFF3	
Frequency	Two Frequencies from 28 kHz to 200 kHz
Range Scale	Up to 9,800 ft
ACCU-FISH™*	Available
Bottom Discrimination**	Available
Transducer	1/2/3 kW

* For DFF3 with 50/200-IT transducer only


** Bottom Discrimination transducer required



Precision Features That Give You The Edge

Monitor Sea Surface Temperature

Sea Surface Temperature (SST) is one of the most important pieces of information for fishing in order to find the best spot or area.

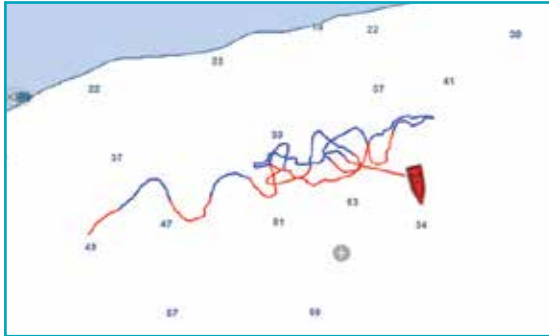

Track Recording

Track recording by SST Variation draws a ship's track in variable colors, helping you find the best spot or area.

Shear Alarm


The Shear Alarm lets you know when there is a sudden change in sea surface temperature, often caused when two currents meet. This is usually a good indication of a great fishing spot.

SST Graph


SST Graph on the Fish Finder display, instrument display or data box shows you the history of SST in the trip.

White Edge Helps Easily Identify Seabed

The top of the seabed is displayed in white to easily discern seabed structure from bottom fish returns. While conventional bottom discrimination function (i.e.: White Line) is applied to the strongest echoes, the White Edge function enhances the discrimination between bottom fish and the seabed.

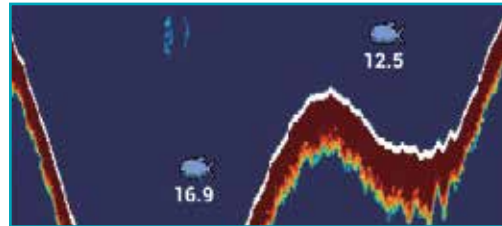

Keep Track With Scroll-Back

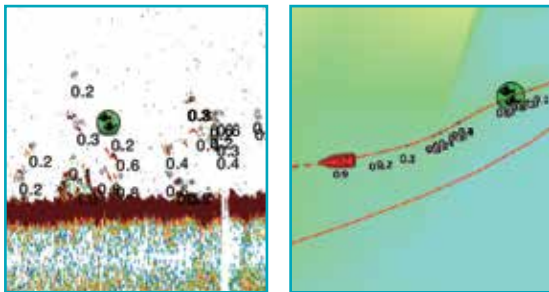


Certain features may require appropriate sensors.

Found a fishing hot spot? Simply tap the screen and add a fish mark. With the scroll-back feature, you can look at past echoes simply by swiping the screen, adding new fish marks that will automatically show the captured location on your plotter screen.

Bottom Discrimination Functionality*

The Bottom Discrimination function enables the Fish Finder to indicate whether the bottom is composed mainly of rocks, gravel, sand or mud.

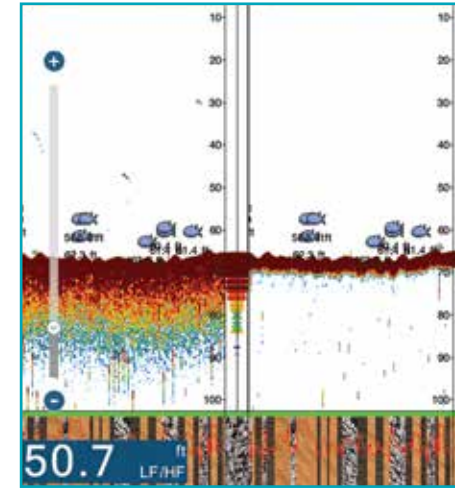

Probability Mode:

Rocks	Gravel
Sand	Mud


Graphic Mode:

Rocks	Gravel
Sand	Mud



ACCU-FISH™ (Fish Size Analyzer)*

ACCU-FISH™ is a fish size assessment function that is unique to Furuno. In order to assess individual fish size, echo returns are evaluated based on strength and turned into fish size display on screen. ACCU-FISH™ can detect fish size from 4 to 78 in, in depths of 7 ft to over 300 ft. In some instances, fish size indicated may differ from actual size. Please read the operator's manual carefully before using this feature.

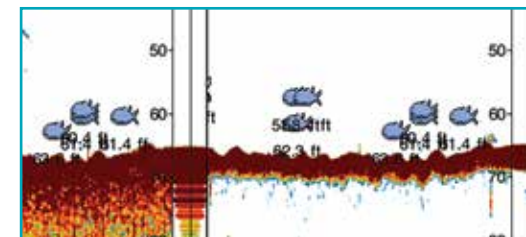

*Requires compatible transducer

Onboard Systems Monitoring

CZone Digital Switching


www.czone.net

CZone digital switching by BEP simplifies the installation and operation of complex electrical systems. NavNet TZtouchXL/TZtouch3 is compatible with CZone controls, allowing you to operate CZone equipment. CZone, engine, navigation and various NMEA2000 data can displayed on the same screen.



My TIMEZERO™ Cloud Data

login.mytimezero.com

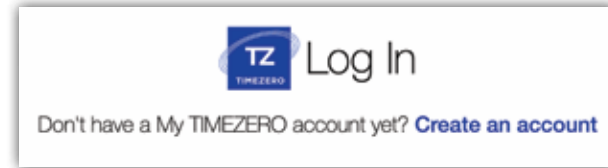


Connect your NavNet TZtouchXL/TZtouch3 to the Internet and login to your My TIMEZERO™ account, and you will be able to back up or restore points, routes, tracks and settings to/from the cloud server. Plan routes on your tablet at home and transfer them to your TZtouchXL/TZtouch3 onboard through the cloud.



Marine Weather Forecast*

*Internet connection is required

The weather tool is **completely free** and easy to use, giving you unlimited access to weather forecasts, worldwide, 24 hours a day, provided by NavCenter. NavNet Series can display up to 16 days of downloaded weather forecasting.

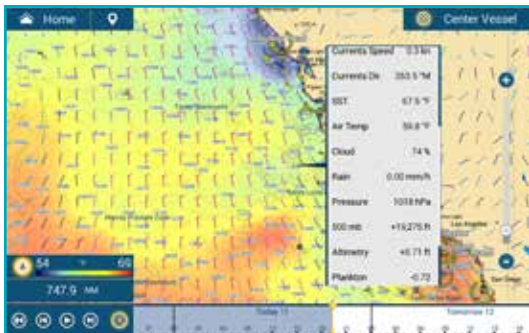

SiriusXM Satellite Weather

Keep track of the weather, listen to your favorite tunes, and now track fish with Furuno's BBWX4 Fourth-Generation SiriusXM Satellite Weather Receiver for NavNet TZtouchXL/TZtouch3/TZtouch2.

(U.S. and Canada only, requires SiriusXM subscription)



Marine Audio FUSION-Link

<https://www.fusionentertainment.com/fusion-link>

Enjoy the ability to control all FUSION-Link enabled APOLLO and conventional 700/750/755 series marine entertainment system capabilities and functions directly from the NavNet TZtouch Series. FUSION-Link makes it easy for you to enjoy your onboard audio entertainment from the NavNet TZtouch Series.



View Info Wirelessly From Your Smart Device

For Apps and Smart Devices

Compatible with NavNet TZtouch Series



NavNet TZtouchXL and TZtouch3 open the door to cutting edge Wireless LAN features, such as iOS and Android™ apps, real-time weather data, software updates, and much, much more.



NavNet Remote

Take full control of your NavNet series in a whole new way. The NavNet Remote app allows you to remotely operate and view your system with your smart devices when connected to the Wireless LAN network.



NavNet Controller

Wirelessly control NavNet series with touch controls just like the real thing. With a scroll pad, cursor pad and dedicated keys within the app, controlling NavNet is simple and straightforward.



NavNet Viewer

Conveniently view instruments of your NavNet series on your smart devices over the Wireless LAN network. Key navigational information such as Depth, Temp, Wind, COG as well as Engine information can all be accessed from the palm of your hand.



TZ First Mate: Keep Track of Your Catch and Catch Location


You put in blood, sweat, and tears finding the perfect hot spot, and guess what, it paid off! Wouldn't it be nice to make a note of what you caught and how big it was? Now your TZtouchXL & TZtouch3 displays can do that when you drop an event mark. Choose the species, enter length & weight, and even take a picture with your phone. View & edit the marks on your smart devices with the TZ First Mate App, TimeZero PC Software, or TZ iBoat.



View and edit from your smartphone or tablet.




Choose from a list of species and enter optional length and weight.

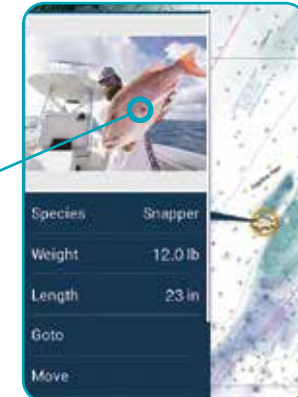

See your catches on the map.


TZ Cloud: Never Lose Waypoints or Routes Again

Create your routes at home using TZ Navigator, a web browser*, or TZ iBoat iOS App. Then you can retrieve them from the cloud & download to your TZtouchXL/TZtouch3. Also, create events on your MFD and retrieve them at home because the data is synchronized automatically & securely to My TIMEZERO. TZ Cloud also stores marks, routes, boundaries, photos, and catch data! (*cloud.mytimezero.com raster planning charts for US only)

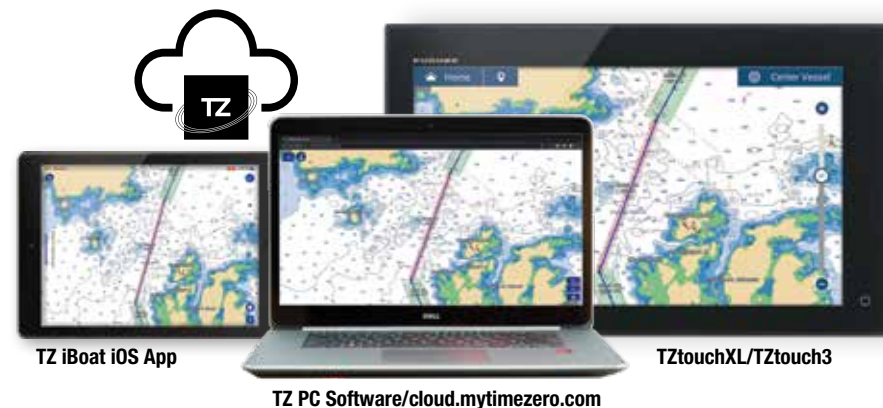

NavNet Series Network Product Lineup

LEGEND:



NMEA0183 to CAN bus converter available. The optional IF-NMEA2K2 converts NMEA0183 sentences to Furuno CAN bus and NMEA2000 PGNs, enabling conventional NMEA0183 devices to be incorporated into the NavNet TZtouchXL/TZtouch3 network.



RADAR



Radar Sensor
DRS4DL+
DRSNXT Series
DRS X-Class Series
ETHERNET



Marine Radar
FAR1513BB/1518BB Series
ETHERNET



Marine Radar
FAR22x8BB Series
ETHERNET

FISH FINDERS



Network Fish Finder Amp
DI-FFAMP*
ETHERNET

* Minimum 1 TZT12F/16F/19F required



Multibeam Sonar
DFF3D
ETHERNET



Network Fish Finder
DFF1-UHD/DFF3-UHD/DFF3
ETHERNET



Bottom Discrimination Fish Finder
BBDS1
ETHERNET



Depth/Speed/Temp Sensor
DST800/DT810/DST810
NMEA2000

AIS



AIS Receiver
FA40
NMEA0183 **NMEA2000**



Class-B+ AIS Transceiver
FA70
NMEA0183 **NMEA2000**



U-AIS Transponder
FA170
ETHERNET

GPS



GPS/WASS Receiver Antenna
GP330B
NMEA0183 **CAN BUS**



Satellite Compass™
SCX20/21
NMEA2000 **NMEA0183**

INSTRUMENT/ DATA ORGANIZERS



Data Organizer
F170
NMEA2000



Data Organizer
RD33
NMEA2000

AUTOPILOT



Autopilot
NAVpilot 300
NMEA2000



Autopilot
NAVpilot 711C
NMEA0183 NMEA2000

COMPASS



Compass
SC70
NMEA0183 NMEA2000



Satellite Compass™
SC33
NMEA2000



Satellite Compass™
SCX20/21
NMEA2000 NMEA0183



Integrated Heading Sensor
PG700
NMEA2000

VHF COMMUNICATION



Marine VHF Radiotelephone
FM4800
NMEA0183 NMEA2000



Marine VHF Radiotelephone
FM4850
NMEA0183 NMEA2000



Marine VHF Radiotelephone
FM8900S

WEATHER/ PC PLOTTER



TIMEZERO
Marine Software
ETHERNET



Network Weather Facsimile Receiver
FAX30
ETHERNET



Satellite Weather
BBWX4
(North America only)
ETHERNET

OTHER



Digital Switching System
CZONE
NMEA2000



NMEA2000



HDMI IN
TZT2BB/TZT16F/TZT19F/TZT13X/
TZT16X/TZT22X/TZT24X only



Marine Entertainment System
Fusion APOLLO Series, etc.
ETHERNET NMEA2000

NavNet Command Center*
3rd Party Device Integration
(more devices planned)



* NavNet TZtouchXL, TZtouch3 Series and TZT2BB only



External Fish Finders can also be connected to TZtouchXL/TZtouch3. The internal and external Fish Finder cannot operate simultaneously. You can select which one to use from the settings menu.



External GPS antennas and navigators can also be connected to NavNet TZtouchXL/TZtouch3. You can select which one to use from the settings menu (internal not available for TZT2BB).

TIMEZERO Software

A Powerful Navigation Tool That Meets Your Demands

Today's captains expect a lot from their navigation systems. TIMEZERO Navigation Software is the ideal system for captains and crews that demand the best. TIMEZERO is the only navigation platform that combines intelligent weather with superior raster and vector charting support, hallmarks of superior engineering and expertise. TIMEZERO is a powerful navigational tool capable of blending and analyzing data from multiple sources in real-time. Features such as multi-screen support and full network compatibility make it, without a doubt, the most accurate and advanced onboard tool of its kind. TIMEZERO offers simple operation, increased productivity and the comfort of added confidence and safety.



For more information visit: mytimezero.com



Seamlessly Exchange Your User Objects with TZtouchXL/TZtouch3 Series*

All your User Objects (Marks, Routes, Boundaries, Photos, Catches) are automatically synchronized between TIMEZERO PC Software and your MFD as soon as they are connected on the same local network (Ethernet LAN). In addition, if the computer has access to the Internet, TIMEZERO PC Software will be able to back up your data to the cloud using your My TIMEZERO account. A maximum of 100 boundaries can be imported to NavNet TZtouchXL/TZtouch3.

* Software version 4.01 or later

TZ iBoat (iPad and iPhone App)

TZ iBoat is the best marine navigation app for coastal sailing, featuring easy-to-use functions and the fastest and smoothest chart display ever, as well as 3D data and weather information for an unparalleled experience. TZ iBoat is powered by the amazing TIMEZERO technology, featuring a 2D/3D chart display, PhotoFusion™ and the most accurate marine charts thanks to TZ MAPS and MapMedia's unique mm3d format.

TZ iBoat can connect to the Wireless Hotspot created by the NavNet TZtouchXL/TZtouch3 Series and use the navigation data (Position, COG/SOG, Heading, Depth, Wind and AIS*) available on the NavNet network. In addition, TZ iBoat also has the capability to synchronize all your User Objects with the MFD (including the Active Route). If the iPad has access to the Internet, TZ iBoat Software will be able to back up your data to the cloud using your My TIMEZERO account.

*AIS module sold separately.



DRS4W Radar Overlay

Furuno 1st Watch Wireless Radar DRS4W with TZ iBoat provides a Radar overlay image across the App's navigational chart on your iPhone or iPad in real-time.* Additional modules allow Radar overlay from DRS-series antennas.

* Radar Module (in-app purchase required).

Anchor Watch Alarm

The NEW advanced anchor alarm features allow you to choose the anchor activation and positioning method to perform quick management, and gradual display of the alarm.


TZ Navigator V5 >>> Spec P98



- Marine navigation software with a fast and smooth full 2D/3D chart engine: Our navigation software operates in a fully rendered 3D environment and delivers unparalleled speed and a seamless chart plotting experience
- Worldwide chart coverage: mm3d chart catalog with raster and vector charts (C-MAP)
- Connect your GPS and Autopilot (NMEA compatible serial ports or Ethernet by Furuno)
- Free worldwide weather forecast service: Download/overlay weather updates for free, allowing you to perform advanced planning
- Redesigned and user-friendly interface: The exclusive TIMEZERO interface combines functionality with ease of use, providing for a practical and personalized navigating experience
- Exclusive PhotoFusion™: Fuse satellite images to the marine chart
- AIS/TT function included: TIMEZERO can be connected to any AIS using NMEA0183 or via Ethernet
- Marine charts, 3D data, worldwide tide database (display tidal data on TIMEZERO to know about water depth in ports) and standard satellite photos
- Routes & Waypoints management
- New Route Planning Wizard/Security Cone/Odometer NavData
- New Furuno advanced compatibility
- Radar overlay module available (requires DRS series antenna)



Route Planning Safety

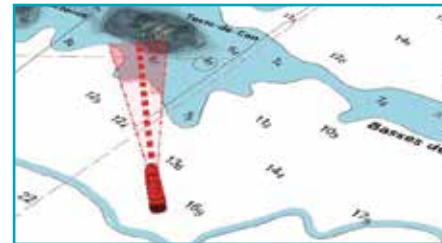


Security Cone




Weather Routing with the TZ Routing Module


TZ Professional V5 >>> Spec P98

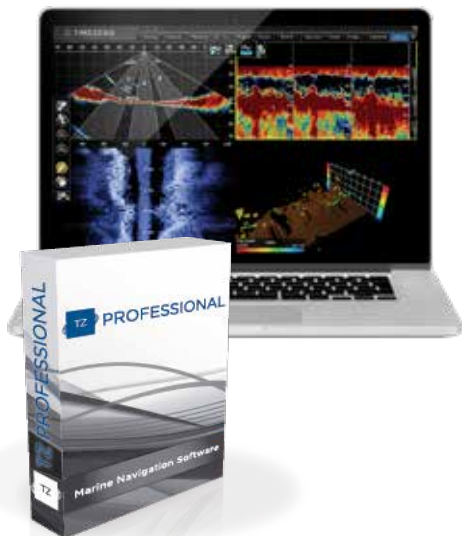


- The latest version of the PBG module allows you to create clearer, more realistic charts of the seafloor. Connect to DFF3D Multibeam Sonar with optional module
- Instantaneously display a point-to-point depth profile window. This 2D view allows you to identify the depth variations with unequalled precision (rocks, shipwrecks, etc.)
- A workspace exclusively dedicated to professional fishermen allows for personalization of 2D/3D, so info that is most pertinent is shown first
- Keeping up-to-date charts is an essential element to ensure the safety of all those at sea
- Now compatible with the official S57/S63 formats
- Thanks to cutting-edge augmented reality technology, TZ Professional V5 allows you to display the active route and cross track distance directly on the camera video feed. Identify all boats equipped with AIS surrounding you and mitigate the risk of collision
- Up to three monitors can be used simultaneously working on independent workspaces
- TZ Professional V5 introduces the new Premium Ocean-O service for pelagic fishing, providing higher resolution and a new type of multi-layer data. This service is geared toward commercial fishermen and advanced sport fishermen who want to target best possible fishing spots

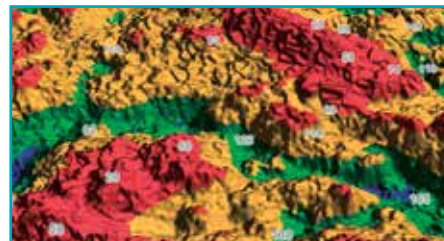

Ultra Realistic Seafloor Bathymetry

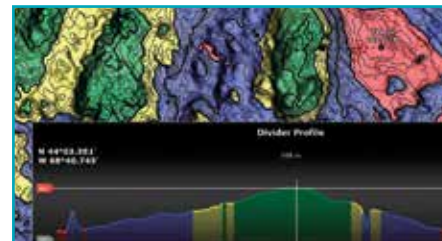

Custom Profile Windows

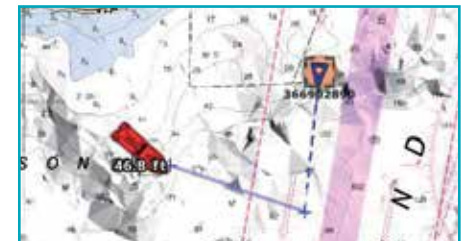

AIS with Cartography Overlay



Radar Options for ANY Vessel



RADOME TYPE

DRS2D-NXT
DRS4D-NXT

OPEN ARRAY TYPE

DRS6A-NXT
DRS12A-NXT
DRS25A-NXT



RADOME TYPE

DRS4DL+
DRS4D X-Class

OPEN ARRAY TYPE

DRS6A X-Class
DRS12A X-Class
DRS25A X-Class

SOLID STATE DOPPLER RADAR
NXT SERIES

DOME	OPEN ARRAYS - 3.5', 4', OR 6'		
DRS2D-NXT/DRS4D-NXT	DRS6A-NXT	DRS12A-NXT	DRS25A-NXT
DRS4DL+/DRS4D X-Class	DRS6A X-Class	DRS12A X-Class	DRS25A X-Class

RADAR SENSOR
X-CLASS

With image quality comparable to that of a conventional 10" LCD wired Radar, the DRS4W offers impressive performance!



Model DRS4W

▶▶▶ Spec P101

1st Watch Wireless Radar

KEY FEATURES:

- Powerful yet compact Wireless Radar antenna
- First Radar in the world accessible from your iOS devices
- Simple touch interface with familiar gestures
- User selectable range scale from 0.125 to 24 NM
- Two iOS devices – simultaneous operation
- Wirelessly connect to GP-1871F or GP-1971F and one iOS device
- TimeZero Marine Navigator (TZ iBoat) provides a Radar overlay image across the App's navigational chart on your iPad in real-time - Radar Module (in-app purchase) required



Radome Selection:

Model DRS4W	
Output Power (kW)	4 kW
Size	19" Radome
Range Scale (NM)	0.125-24
Rotation Speed	24 rpm

Software Selection:



App	Radar	Simulator*
App version	2.0.0	2.0.2
Compatible iOS	iOS6.1 or later	
Language	English	

* Simulator App will help you learn how to use the DRS4W in an offline environment before you navigate with the DRS4W onboard.

Wirelessly Connect to Your Mobile Devices and GP-1871F/1971F



The Furuno DRS4W Wireless Radar can be connected to the GP-1871F/GP-1971F GPS/WAAS Chart Plotter. Refer to pages 43-44 for details.

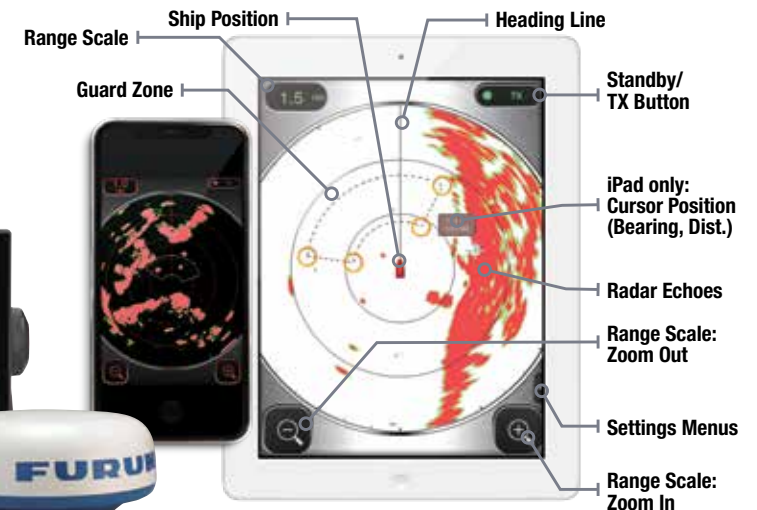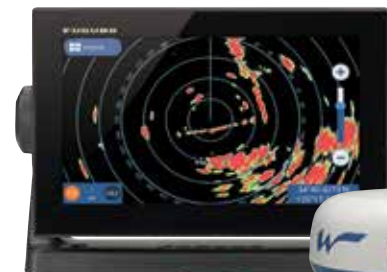



Model 1815

▶▶▶ Spec P102

8.4" Color LCD Radar

KEY FEATURES:

- Compact radome antenna with 4 kW transmitter output power and low power consumption - 38 W max
- Easy installation and intuitive operation
- Advanced auto-adjust settings for Gain, Sea, and Rain clutter
- AIS/Fast Target Tracking*: Target speed and course vector are displayed seconds after target acquisition
- True Trail Mode: Moving objects will appear on the main screen with a colorful trail
- True View Mode: Based on the head-up mode, reduces the discrepancy between an observed target and what is displayed on the Radar
- Echoes in yellow, green, orange, or white colors
- User-programmable function keys
- Swivel mounting bracket to adjust the angle of the display unit

*Optional input required



Antenna Selections:

MODEL 1815	
Output Power (kW)	4
Size	19" Radome
Range Scale (NM)	0.0625-36
Rotation Speed	24 rpm


AIS/Target Tracking Up To Ten Targets*

Fast Target Tracking function manually or automatically acquires and tracks 10 targets. After selecting a target, it takes only a few seconds for a speed and course vector to be displayed. With accurate tracking information, estimation of other vessel's course and speed is made easier.

Target Tracking (TT) Symbols



Targeted vessels with AIS information

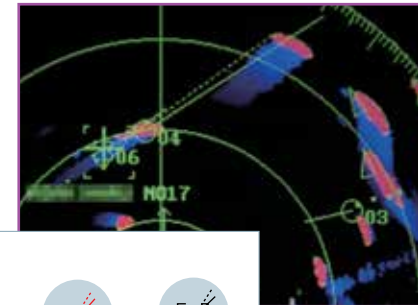

AIS Symbols



AIS Display with FA-40/70 Units*


When connecting a Furuno FA-40/70 AIS unit, up to 100 AIS targets can be tracked and displayed on the Radar screen. You can easily read detailed information about other AIS-equipped vessels nearby, such as speed and heading. Additionally, the FA-70 AIS transponder improves safety during travel by sharing the status and position of your vessel with other AIS-equipped vessels nearby.

OWN SHIP		+CURSOR	
LAT	34°38.792N	LAT	34°37.840N
BRG		BRG	
LOA	135°17.716E	LOA	135°17.707E
RNG		RNG	
SPEED	5.6kn	TTG	00:10
TTG		TTG	
TRUE 06:00<AIS> MMSI: 431300202 NAME: <i>Asahi</i>			
BRG	181.9°T	RNG	0.918NM
COG		COG	256.3°
CPA	0.88NM	TCPA	01:24
LEN		LEN	76m

Tracking Information


* Heading sensor is required to display AIS

Selectable Modes for Changing Situations

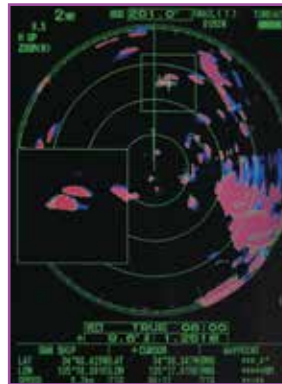


Zoom Mode

Expands the length and width of a selected target with the magnification of 2.0 in the zoom window.

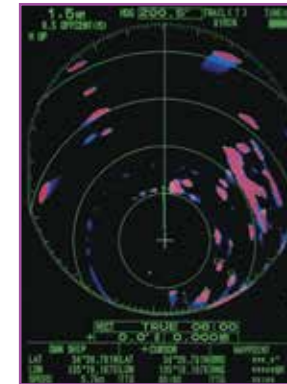

Off Center Mode

Focus on a specific area ahead of or around the vessel without losing track of the position.

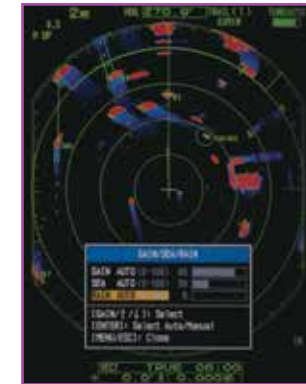


Gain, Sea, & Rain Settings

By automatically adjusting the gain, the Radar eliminates unnecessary echoes and displays a clear image.

True Trail Mode*

Moving objects will show up on the main screen with a gradation trail. These trails make it possible to see the movement of nearby vessels in the blink of an eye.

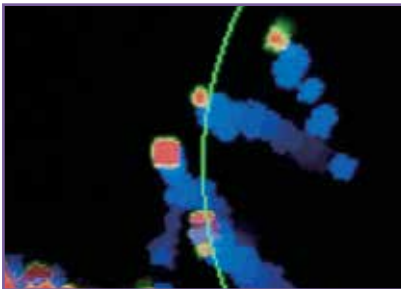

* True Trail Mode: Heading sensor is required


Multi-Station Configuration

Multi-station configuration allows up to three RDP157 (1815 displays) to be connected to a single antenna via an Ethernet hub, without the need to install individual antenna units on each display. This configuration provides a cost saving and dynamic setup for situations requiring the ability to monitor the Radar from different locations on the vessel.




Adjustable Color Layouts

Select the color scheme depending on your environment. From bright sunlight to the dark of night, displayed images can always be seen.




Yellow Echoes



Green Echoes



White Echoes



Orange Echoes



Model FR-10

10.4" Color LCD Radar

KEY FEATURES:

- Risk Visualizer™ - a unique visual representation of the risk of possible collision and close approach for all objects 360 degrees around the vessel
- DRS Radars include features such as Fast Target Tracking™, immediately displaying a vector line for up to 100 targets indicating the target's speed and heading
- Connect to an NXT Radar to unlock solid-state features such as RezBoost™ Beam Sharpening and Target Analyzer™, instantly identifying hazardous targets
- Custom AIS presentation, flexible Anti-Clutter controls, and Stern-Up presentation
- Display Radar echoes overlaid onto MapMedia mm3d charts (FR-12 only - requires RP board kit OP03-266-E)
- Display marks and lines created on a networked GP-3700/F GPS Chart Plotter (FR-12 only - requires RP board OP03-266-E)
- Display boat and barge icons for towing applications

Model FR-12

▶▶▶ Spec P103


12.1" Color LCD Radar Optional Chart Overlay*

Antenna Selections:

DOME		OPEN ARRAYS - 3.5', 4', OR 6'	
DRS2D-NXT/DRS4D-NXT	DRS6A-NXT	DRS12A-NXT	DRS25A-NXT
DRS4DL+/DRS4D X-Class	DRS6A X-Class	DRS12A X-Class	DRS25A X-Class


See Potential Collisions With Risk Visualizer™

Risk Visualizer™ is a technology that shows potential collision areas based on the current position and movement of all surrounding vessels. Thanks to the on-screen display, it is easy to get a quick and intuitive overview of the situation around your ship. A color-coded icon alerts you according to the threat of a collision, from green (normal) to red (hazardous). This shows where your own ship could collide with others, as well as the time to reach that dangerous area, allowing the captain to interpret the risk visually and proactively avoid it.

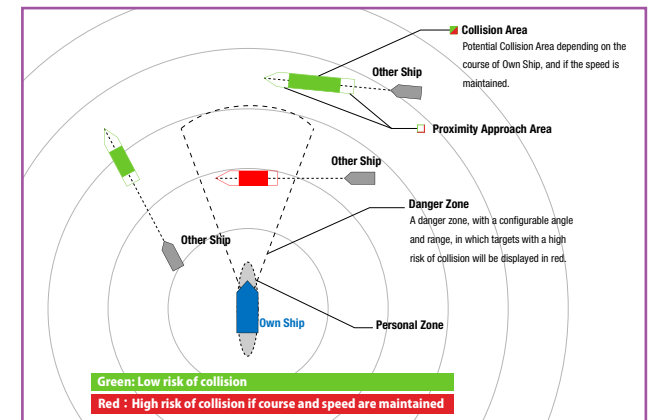

AIS Target Tracking Up To 100 Targets*

Utilizing the vessel's VHF transceiver system, AIS tracks vessel movements and provides a variety of navigational information such as vessel name and speed of the selected targets in real time. AIS targets are visible even when located behind large ships or islands. AIS symbols can be customized with four color options of red, yellow, cyan and magenta, plus the standard color options of green, red, blue, white, and black. The color option is saved on the FR-10/12, so when AIS targets with the same MMSI are received again, they will be shown in the registered colors.

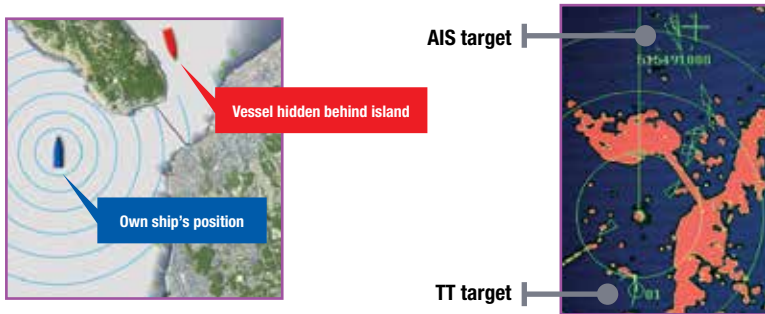

*Requires appropriate sensors

Radar Options

The FR-10 and FR-12 are compatible with any of the DRS Series Antennas, allowing for a variety of configurations. By selecting the detection range (power output), screen size and antenna type/size based on what you want to accomplish, you can build the Radar that best meets your needs.

SOLID STATE DOPPLER RADAR **NXT SERIES**

RADOME TYPE

DRS2D-NXT
DRS4D-NXT

OPEN ARRAY TYPE

DRS6A-NXT
DRS12A-NXT
DRS25A-NXT



RADAR SENSOR **X-CLASS**

RADOME TYPE


DRS4DL+
DRS4D X-Class

OPEN ARRAY TYPE

DRS6A X-Class
DRS12A X-Class
DRS25A X-Class

Built-In Fast Target Tracking™

Fast Target Tracking™ is a technology that instantaneously displays a vector indicating the speed and heading of the target. With this built-in feature, targets are automatically tracked when they first appear, making it possible to immediately calculate the target's trajectory and display the velocity vector. The FR-10/12 is capable of tracking up to 100 targets. When connected to a second FR-10/12 an additional 100 targets in manual mode can be activated.

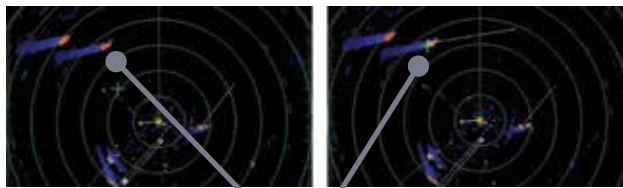


Before

After

Target acquired

Spot Hazardous Targets Instantly


Target Analyzer™ identifies dangerous objects and displays those that are likely to collide with your ship in different colors. Targets approaching your vessel automatically change color to help you identify potential danger. Green echoes are target that are stationary, or are moving away from you, while red echoes are hazardous targets that are moving towards your vessel. Echoes dynamically change color as targets approach, or get farther away from your vessel. The display of potentially dangerous targets in different colors allows an operator to understand threats to safe navigation at a glance.

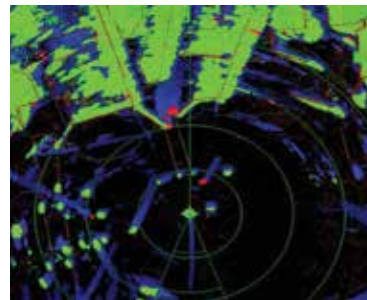

(Works only when connected to an NXT Radar)

Take Sea Clutter Out Of The Equation

Echo Averaging attenuates irregular echoes, such as reflections from the sea surface and precipitation, and stabilizes echoes from fishing gear and other vessels. This makes it easier to see what you want to see, even in poor weather conditions such as high waves, precipitation, or dense fog. The FR-10/12 Echo Average feature identifies true target echoes from the sea clutter.

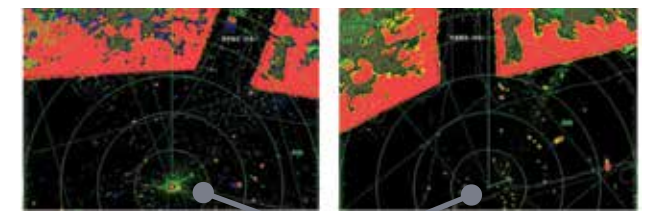

Before

After

Clear Echo Attenuation

The monitor can be mounted in portrait or landscape orientation to easily fit your bridge space.



Being aware of your surroundings is paramount. Your primary line of defense is a Radar you can count on, from a company you can depend on.



Antenna Selections:

Model	FAR-1416		FAR-1426	
Output Power (kW)	12		25	
Size	4' Open	6' Open	4' Open	6' Open
Range Scale (NM)	0.125-72		0.125-96	
Rotation Speed	24/48 rpm			

Model FAR-1416/1426

▶▶ Spec P104

15" Color LCD Radar with Chart Plotter


KEY FEATURES:

- Simple operation with “point-and-click” menu functionality
- Built-in chart overlay on Radar presentation*
- Use Target Analyzer™ to discern hazards simply by looking at the color of their echo*
- Instant speed vector display for tracked targets
 - A speed vector is displayed after clicking on a selected target
- Improved sea and rain clutter removal function
 - Automatic Clutter Elimination (ACE) function provides clear echoes
- Space-saving and simplified installation with processor built into the display
- Straightforward operation using a trackball and wheel menu selector
- Overlay Radar presentation on MapMedia vector charts
- Record vessel's track points and waypoints to help memorize fishing spots
- Easily upgrade from Furuno's FR-8002/8005 series

*Requires appropriate sensors


Radar Chart Overlay

By overlaying Radar on the chart, you can easily recognize coastlines and buoys at a glance. Records of your vessel's track points and waypoints will help memorize fishing points. When the Radar presentation and chart are overlaid, North-Up, Course-Up, and Head-Up direction modes are available.

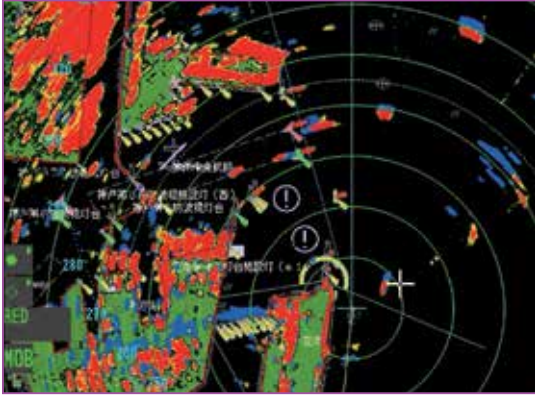


Automatic Clutter Elimination (ACE)

Quickly adjust the Radar image with the push of a single button. With ACE activated, the system automatically adjusts clutter reduction filters and gain control according to sea and weather conditions selected by the user (calm/rough sea/hard rain).

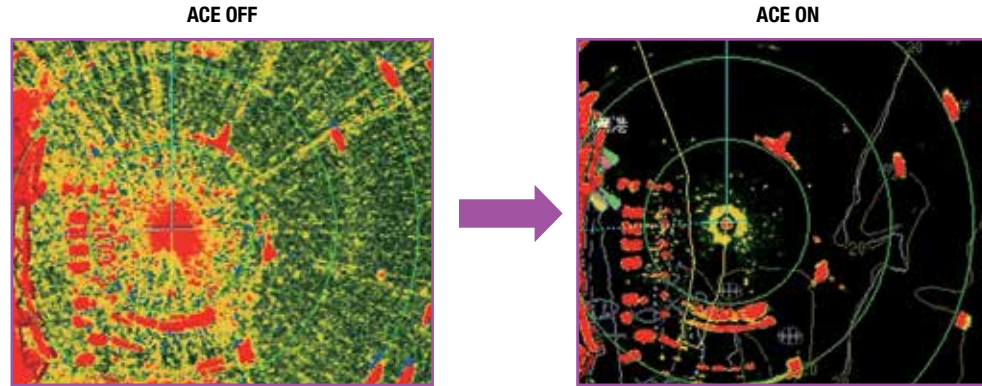


Target Analyzer™ Function* Spots Hazardous Targets Instantly

Target Analyzer™ directly displays targets closing in, while detecting and eliminating sea surface reflection and rain squall. With the Target Analyzer™ function turned on, each moving target, rain patches, and sea surface reflection are colored according to the degree of the hazard. This helps improve your safety and situational awareness by displaying different, easy to see colors.

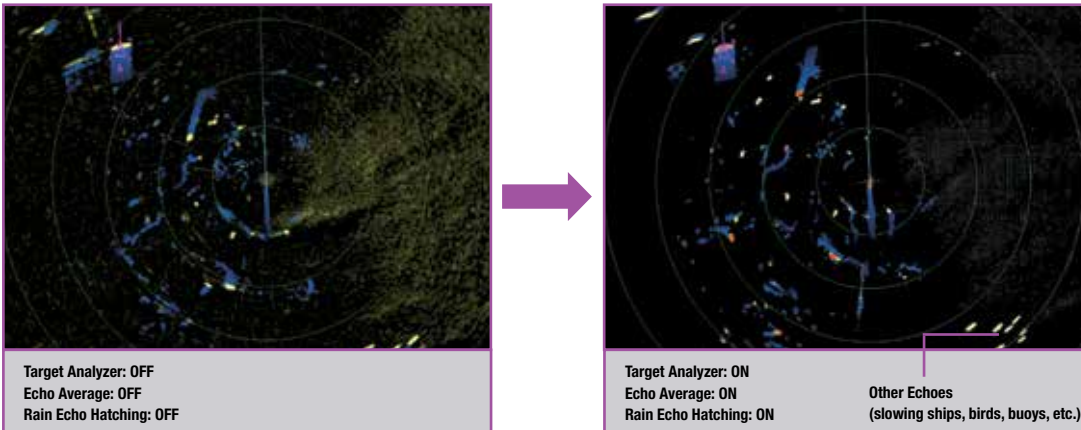

Fast Target Tracking*

After selecting a target, it takes only a few seconds for a speed and course vector to be displayed. With accurate tracking information, estimation of other vessels' course is made easier.

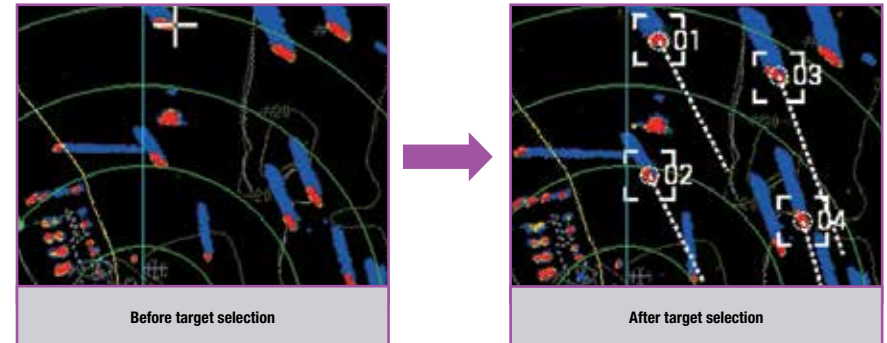

*Heading and position data required

Photo: 15" Marine Display
MU-152HD (Optional supply)



Model FAR-1513/1523-BB

Spec P105

Black Box Radar

KEY FEATURES:


- FAR-1513/1523-BB Marine Radar features advanced functionality in a small and easy-to-use package
- Accurately track other vessels to avoid collisions with Furuno's innovative Fast Target Tracking™
- Improved sea and rain clutter removal function:
 - Automatic Clutter Elimination (ACE) function provides clear echoes
- Instant speed vector display for tracked targets:
 - A speed vector will be displayed after clicking on a selected target
- AIS compatible out of the box (external AIS input required):
 - Targets are automatically acquired and information can easily be displayed on-screen

Antenna Selections:

Model	FAR-1513-BB		FAR-1523-BB	
Output Power (kW)	12		25	
Size	4' Open	6' Open	6.5' Open	8' Open
Range Scale (NM)	0.125-96			
Rotation Speed	24/48 rpm			

Automatic Clutter Elimination (ACE) Provides Unmatched Echo Clarity

Quickly adjust the Radar image with the push of a single button. With ACE activated, the system automatically adjusts clutter reduction filters and gain control according to sea and weather conditions selected by the user (calm/rough sea/hard rain).

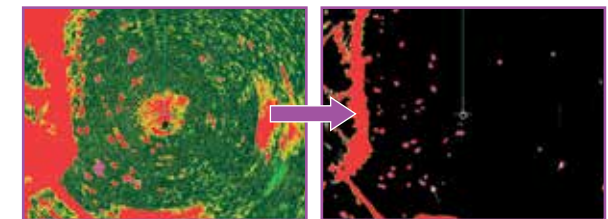

ACE OFF

ACE ON

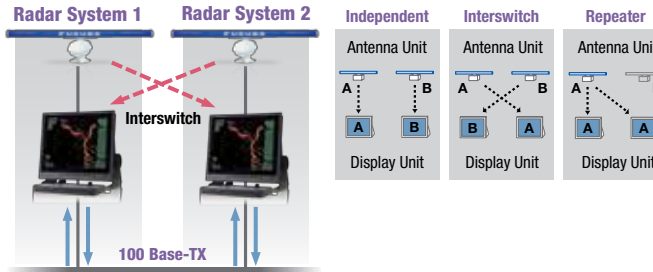


Photo: 15" Marine Display
MU-152HD (Optional supply)




Scalable Ethernet Network System

FAR-15x8 Series utilizes a 100 Base-TX Ethernet connection to network two Radars together. This Ethernet data link gives high-speed and stable navigational data sharing for interswitching as well as sharing data between ECDIS and GPS plotters.




Automatic Clutter Elimination (ACE) Provides Unmatched Echo Clarity

Quickly adjust the Radar image with the push of a single button. With ACE activated, the system automatically adjusts clutter reduction filters and gain control according to sea and weather conditions selected by the user (calm/rough sea/hard rain).

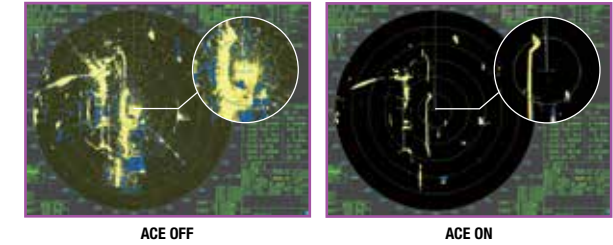

Fast Target Tracking™

After selecting a target, it takes only a few seconds for a speed and course vector to be displayed. With accurate tracking information, estimation of other vessels' course is made easier.

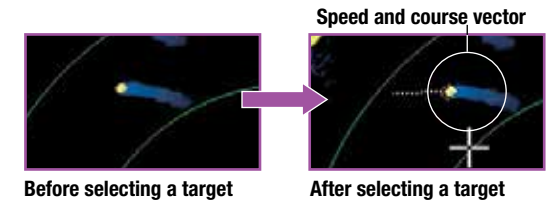

Model FAR-1518-BB / FAR-1528-BB

Spec P105

Black Box Radar

KEY FEATURES:

- FAR-1518/1528 Radar meets the criteria for IMO certification for vessels < 500 GT
- Accurately track other vessels to avoid collisions with Fast Target Tracking*
- Instant speed vector display for tracked targets
- AIS compatible out of the box. Targets are automatically acquired and information is easily displayed (external AIS input required)
- Low noise, large dynamic range antenna unit
- FAR-15x8 Series can overlay Radar echoes on external ECDIS and GPS plotter screens
- Improved sea and rain clutter removal function: Automatic Clutter Elimination (ACE) function provides clear echoes

Antenna Selections:

Model	FAR-1518-BB		FAR-1528-BB	
Output Power (kW)	12		25	
Size	4' Open	6.5' Open	6.5' Open	8' Open
Range Scale (NM)	0.125-96			
Rotation Speed	26/48 rpm			

*Requires appropriate sensor

Simplified Operation

Simple and efficient operation with individual knobs for gain/rain/sea clutter suppression, as well as a RotoKey™ and touchpad. An optional trackball as well as a regular USB mouse can also be used.



Radar



Winner of the 2019 - 2023 NMEA Commercial Product of Excellence Award



2019 - 2023



Photos: 19" Marine Display MU-192HD (Optional supply)



2021 - 2023

Winner of the 2021 - 2023 NMEA Commercial Product of Excellence Award



UHD
Ultra High Definition



Model FAR-22x8-BB Series

Spec P107-108

Black Box Radar (X-Band or S-Band)

KEY FEATURES:

- Accurately track other vessels in order to avoid collisions with Furuno's innovative Fast Target Tracking™*
- Improved sea and rain clutter removal function - Automatic Clutter Elimination (ACE) function provides clear echoes
- Instant speed vector display for tracked targets - a speed vector will be displayed shortly after clicking on a selected target

Antenna Selections:

Open Array	X-Band Radar			S-Band Radar		Solid-State Radar	
	FAR-2218-BB	FAR-2228-BB	FAR-2258-BB	FAR-2238S-BB	FAR-2268DS-BB	FAR-2228-NXT-BB	FAR-2238S-SSD-BB
Output Power	12 kW	25 kW	50 kW	30 kW	60 kW	Solid-State, 600 W	Solid-State, 250 W
Size	4/6.5/8' Open		8/10' Open	8/10/12' Open	10/12' Open	4/6.5/8' Open	8/10/12' Open
Range Scale (NM)	0.125-96						
Rotation Speed	24/42 rpm (Except for XN24CF)						

Model FAR-22x8NXT-BB Series

Spec P108

Black Box Solid-State Radar (X-Band or S-Band)

- AIS compatible out-of-the-box: targets are automatically acquired and information can be displayed on-screen easily*
- Newly designed antenna with enhanced durability and reliability
- FAR22x8 Series can overlay Radar echoes on external ECDIS and GPS Plotter, and on Radar display with optional RP board

*Requires appropriate sensor

NXT Solid-State Radar Specializes In Target Detection and Maintainability

Furuno Solid-State Radar technology generates clear echo images, allowing the user to obtain a clear picture of the area around their vessel, including weaker echoes from small craft. Enjoy reduced maintenance and operating costs, as the fan-less, Solid-State transceiver requires no magnetron.




Power Amplifier Module of the Solid-State transceiver

Solid-State Radar provides nearly the same power capability as conventional magnetron Radars, emphasizing quality and reliability, while also meeting the rigorous demands of the marine environment.

Automatic Clutter Elimination (ACE) Provides Unmatched Echo Clarity

Quickly adjusts the Radar image with of a single button press. When the ACE function is activated, the system automatically adjusts clutter reduction filters and gain control according to user selectable sea and weather presets.

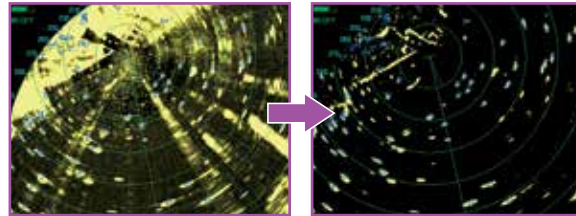


(ACE) OFF

(ACE) ON


Fast Target Tracking™ Function For Early Prevention of Collisions

With Fast Target Tracking™, the FAR-22x8 series provides accurate tracking information; speed and course vectors are displayed in mere seconds, allowing operators to take action and avoid incidents at a very early stage.

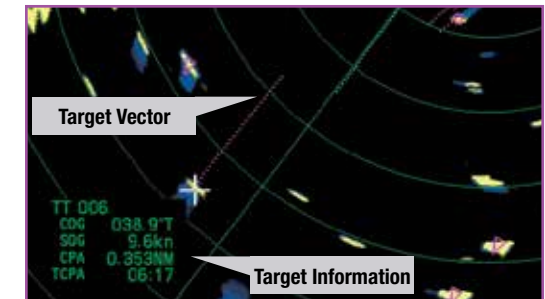

User Interface Designed For Intuitive Operation

InstantAccess Bar™ gives immediate access to the functions you need, containing shortcut menus of tasks, functions, and actions which operators frequently use. Quickly access necessary tasks without navigating cumbersome menus.

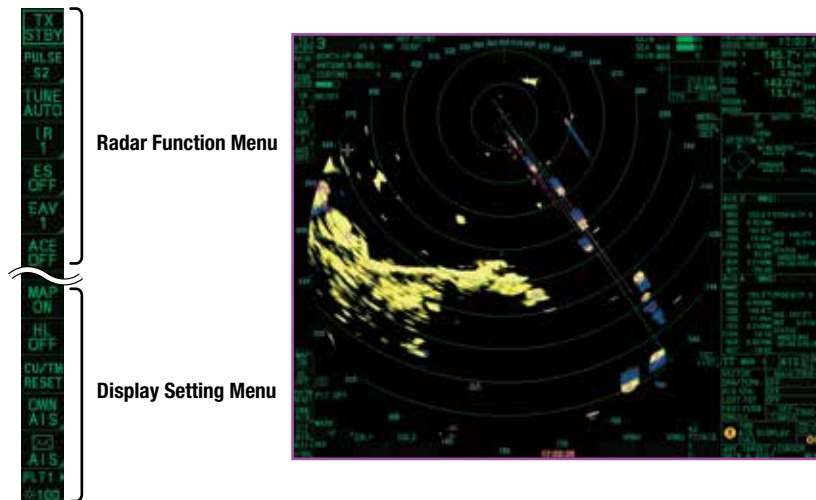



Model FAR-3210-BB/FAR-3220-BB/FAR-3230S-BB/FAR-3220NXT-BB/FAR-3230SSSD-BB

▶▶▶ Spec P110

Black Box Chart Radar

KEY FEATURES:

- Available in X-Band (12/25 kW or 600 W Solid-State) or S-Band (30 kW or 250 W Solid-State)
- New Solid-State S-Band transceiver generates clear echo images, even from weak targets and small craft
- IMO-Approved Chart Radar
- Newly designed, aerodynamic antennas with enhanced durability
- Less maintenance using brushless DC motor
- Ethernet link between scanner unit and processor eliminates signal loss
- Advanced Furuno technology with features, such as Automatic Clutter Elimination (ACE)
- Improved Target Tracking function requires only seconds and tracks even high-speed and rapidly maneuvering vessels*
- Optional LAN Signal Converter allows cables to be extended between the antenna unit and processor unit or to utilize the existing cables when retrofitting

- Advanced Interference Reduction (IR) function
- Common sensor adapter makes installation and maintenance simple
- Complies with all major performance and fitting requirements

Antenna Selections:

Open Array	X-Band Radar		S-Band Radar	Solid-State Radar	
	FAR-3210-BB	FAR-3220-BB	FAR-3230S-BB	FAR-3220NXT-BB	FAR-3230SSSD-BB
Output Power	12 kW	25 kW	30 kW	Solid-State, 600 W	Solid-State, 250 W
Size	4/6.5/8' Open		12' Open	4/6.5/8' Open	12' Open
Range Scale (NM)	0.125-96				
Rotation Speed	24/42 rpm				

*Requires appropriate sensor




Refined Antennas With High Signal Accuracy and Excellent Reliability

High image quality is achieved by the signal processor inside the new antenna unit, directly converting signals from analog to digital before sending them to the main processor unit. The new antenna shape minimizes aerodynamic drag and lightens the burden on the gear box. Installation and maintenance are now easier than ever. All components of the gearbox are integrated into one block that can easily be removed from the gearbox when maintenance is required.




Automatic Clutter Elimination (ACE) Provides Unmatched Echo Clarity

Quickly adjust the Radar image with the push of a single button. With ACE activated, the system automatically adjusts clutter reduction filters and gain control according to sea and weather conditions selected by the user (calm/rough sea/hard rain).

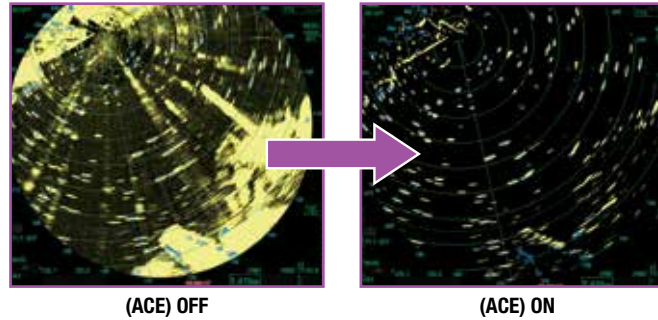


Advanced Tools For Simplified Navigation

The user interface of the Radar utilizes carefully organized operational tools: The **Status Bar**, **InstantAccess Bar™** and **Side Conning** (when connected to wide monitor). These operational tools deliver straightforward, task-based operation, allowing the operator to quickly view and perform tasks without having to navigate a complex menu tree.

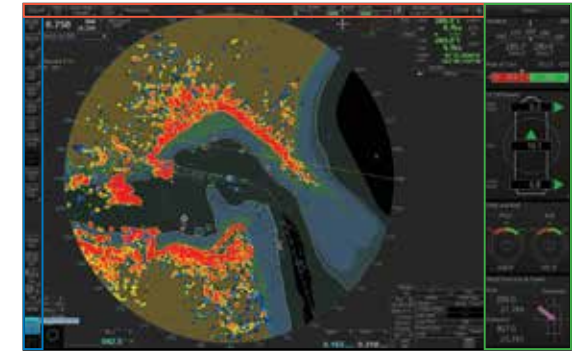


Target Analyzer™ Function

Target Analyzer™ function displays moving targets, stationary targets, rain, sea surface, and targets closing in on your vessel in different colors. Spot hazardous targets simply by the color they are displayed in. It can increase your safety as well as improve situational awareness.

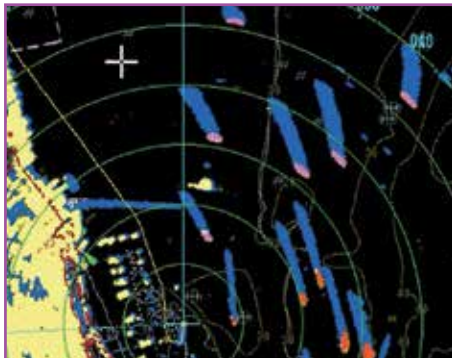

Fast Target Tracking™

After selecting a target, it takes only a few seconds for a speed and course vector to be displayed. With accurate tracking information, estimation of other vessels' course and speed is made easier.

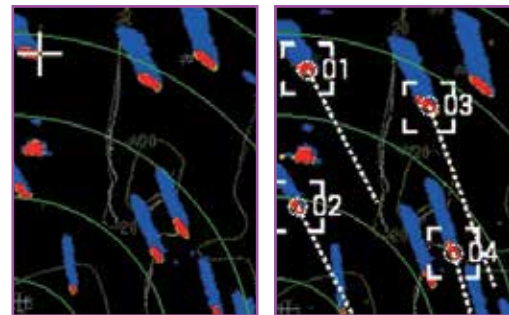

Before selecting a target

Speed and course vector

Chart Overlay On Radar Presentation*

By overlaying Radar presentation and chart map, you can easily recognize coastlines and buoys at a glance. Records of your vessel's track points and waypoints will help memorize fishing points. When the Chart Radar presentation and chart map are overlaid, North-Up, Course-Up, and Head-Up mode will be available.



*Requires appropriate sensor

GPS/Chart Plotters



Model GP39


►►► Spec P113

4.2" GPS Navigator

KEY FEATURES:

- Newly designed GPS core delivers enhanced position fixing accuracy
- Stores up to 10,000 waypoints, 100 routes, and 3,000 track points
- Enhanced precision utilizing SBAS (Satellite-Based Augmentation System) for more accurate measurements, heading, position, etc.
- Share and display position information on networked equipment, such as a Fish Finder, Sonar, Radar, etc.
- Display 3-Axis Speed/Pitch, Roll, Heave/ROT/Heading data from SCX20/21
- Larger numbers for better viewing on display

Display Data On Connected Devices

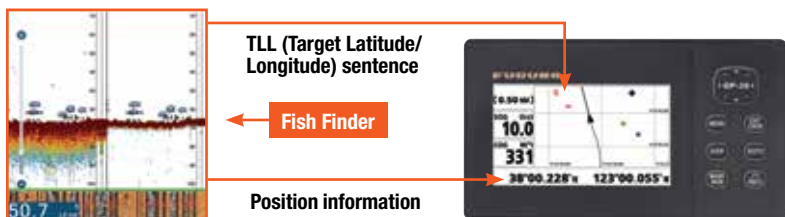

Easy to mount on/off the bracket.

Import/Export Waypoints and Routes

Waypoint and route data can be exported/imported via a USB flash drive or signal converter.





Model GP170/GP170D

▶▶▶ Spec P114

5.7" GNSS Navigator

KEY FEATURES:


- Newly designed GPS chip and antenna unit deliver precise and stable position fix
- Enhanced precision utilizing SBAS (Satellite-Based Augmentation System), DGNS (Differential Global Navigation Satellite System), and SLAS (Sub-meter Level Augmentation Service)
- GP170D provides enhanced precision by utilizing DGPS Simplified menu operation
- 10 Hz position update rate (every 0.1 sec) making own ship position tracking possible
- Bridge Alert Management (BAM) compliant
- IEC61162-450 Ethernet networking

Full compliance with IMO Performance Standards and IEC Testing Standards

FUNCTION	IMO PERF. STANDARD	IEC TEST STANDARD
GPS	MSC.112 (73)	IEC61108-1
GLONASS	MSC.113 (73)	IEC61108-2
DGNS	MSC.114 (73)	IEC61108-4
MULTI *	MSC115 (73)	---
Alert Management	MSC.302 (87)	IEC62923-1/-2

Bridge Alert Management-Ready

The GP170 is BAM (Bridge Alert Management) ready and boasts a variety of display modes, including Plotter, Course, Highway, Data, and Integrity. The Integrity display mode delivers a highly-accurate Skyplot presentation of currently viewable satellites, status on GNSS/SBAS signal reception including strength and SNR, and elevation angles of available satellites, as well as detailed information about available beacon stations.

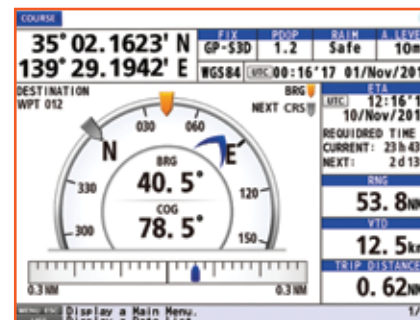


GPS/Chart Plotters



"I have a pair of GP-1971Fs and they BOTH worked flawlessly over the course of 2,000 nautical miles, with one performing dedicated Fish Finder duties and the other the Chart Plotter."

*- Capt. John Raguso,
The Fisherman Magazine*

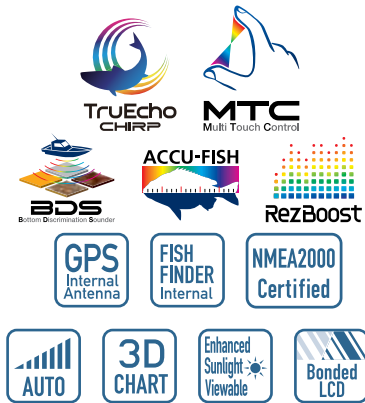

Model GP1871F

▶▶▶ Spec P115

**7" Wide GPS/WAAS Chart Plotter
with built-in TruEcho CHIRP™ Fish Finder**

KEY FEATURES:

- Easy and intuitive operation with multi-touch interface
- Daylight viewable multi-touch display with excellent readability, brightness of 1000 cd/m² (typical)
- Anti-reflective glass coating, strengthened glass filter
- Anti-fingerprint treatment on AR glass*
- Internal GPS/WAAS antenna for simplified installation
- Internal memory: 30,000 waypoints, 1,000 routes
- Autopilot (NAVpilot 300 and NAVpilot 711C) controls available on the display (sold separately)
- Built-in TruEcho CHIRP™ Fish Finder (single-band)
- Fish Finder's Post-processing Gain Control applied to all echoes displayed on the screen
- Detects fish lying near the bottom with White Edge function
- Compatible with DRS4W 1st Watch Wireless Radar
- Works with Navionics® or C-MAP 4D cartography


* GP1971F only

Model GP1971F


▶▶▶ Spec P115

**9" Wide GPS/WAAS Chart Plotter
with built-in TruEcho CHIRP™ Fish Finder**


Powerful Built-in Features Maximize Your Catching Potential

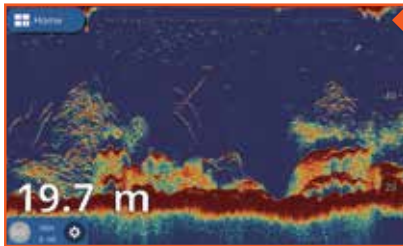


TruEcho CHIRP™ Fish Finder*
The high level of detail available with TruEcho CHIRP™ technology helps to distinguish fish schools, even when close to the seabed.

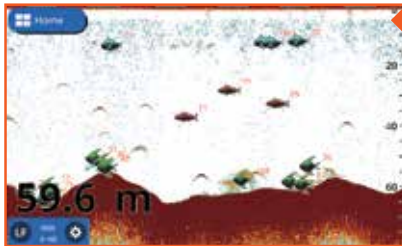

ACCU-FISH™**
Individual fish size is calculated from echo strength. ACCU-FISH™ can detect fish sizes of 4 in to 78 in, at depths of 7 ft to 300 ft.

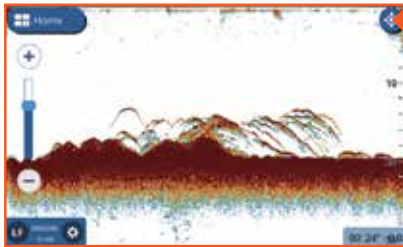

RezBoost™ Fish Finder**
Provides a higher resolution picture of fish schools from a standard 50/200 kHz dual frequency transducer.

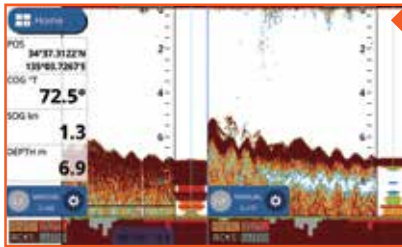

Bottom Discrimination Function™**
The Bottom Discrimination feature enables the Fish Finder to indicate if a major component of the seabed is mud, sand, gravel, or rocks.



*TruEcho CHIRP™ transducer required.
**Must be connected to a compatible dual-frequency transducer.

GUI Based On NavNet TZtouch3

Tap the Home Button for instant access to the main menu and display modes. Save your favorite modes in the Quick Page list and easily switch between modes.





Home Menu



Close Up:
Quick Page List

New FishHunter™ Drive Mode Indication

FishHunter™ Drive offers unique boat control features achieved through joint development with FURUNO and Suzuki. In combination with the NAVpilot-300 and compatible Suzuki outboard engine models, unique features of Speed Control, Route Smoothing™, Auto Stop on Arrival, Point Lock™, and SABIKI Lock™ are available. The GP1871F/1971F v5.0 software supports mode and alert indications for FishHunter™ drive.



Optional Wireless Radar Connection to DRS4W

Radar can be overlaid onto the Chart Plotter display via wireless connection to the Furuno DRS4W 1st Watch Wireless Radar*. The DRS4W's wireless configuration makes it a breeze to add the compact 19" Radome to any vessel. The DRS4W can also display the Radar presentation on a connected iOS smart phone or tablet, offering a major upgrade in safety and versatility.



1st Watch Wireless Radar Model DRS4W.
Refer to page 26 for details.

*Requires heading sensor

GPS/Chart Plotters



With a variety of innovative functions, shortcut control keys, and a 12.1-inch IPS screen that provides clear visibility, the GP3700 series gives you immediate situational awareness. Large storage capacity for track points, buoy points, and marks/lines makes it a perfect solution for long-term fishing operations.



Model GP3700

▶▶▶ Spec P116

12.1" GPS/WAAS Chart Plotter

Model GP3700F

▶▶▶ Spec P116

**12.1" GPS/WAAS Chart Plotter
with built-in Fish Finder**

KEY FEATURES:

- Customizable keys allow you to create menu shortcuts before leaving the dock for a more intuitive operating experience
- Screenshot function allows you to look back at past data
- 12.1" IPS LCD features a distinctively clear screen and super-wide viewing angles for excellent readability
- Stores up to 30,000 own ship track points, 10,000 TT/AIS/GPS buoy points, and 30,000 marks/lines
- Utilizes MapMedia Vector cartography
- Scroll Back function allows you to scroll backwards through the Fish Finder history to find fishing grounds or fish targets again, so you can drop a mark and plot a course back to that area
- A wide variety of display modes can be cycled through at the touch of a dedicated DISP key
- "UNDO" key lets you go back one operational step of deleting and drafting your marks and lines with a single press of a button
- Easy-access USB flash drive on front panel for fast and simple data backup and retrieval



Smart Features For Ease-Of-Use

Both the GP3700/3700F incorporate an easy-to-use interface while adding new enhancements and features. With a variety of innovative functions, shortcut control keys, and a 12.1" IPS screen that provides clear visibility, the GP3700 series gives you immediate situational awareness. Large storage capacity for track points, buoy points, and marks/lines makes it a perfect solution for long term fishing operations.

Colorful keys allows for mark lines and points on the display.

Trackball can be used to quickly move the cursor, while the arrow keys can be used for more precise cursor manipulation.


Variety Of Orientation Modes*

The GP3700 Series features Head Up, North Up, Auto Course Up, Course Up, Go To Up, and Specified Direction Up display modes. Specified Direction Up mode is a target-oriented navigation map, allowing the chart to remain vertical in the direction of the target. Select the desired display mode to suit your operational needs.

*Requires appropriate sensor



Head Up Mode

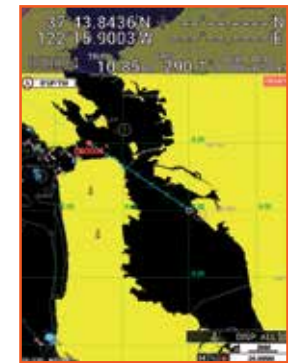


Specified Direction Up Mode


Versatile Display Modes

The GP3700 Series provides and displays navigation data in a variety of modes. All of the available display modes can be switched by pressing the DISP key. Plotter, Compass, Satellite information, and Fish Finder* can be selected and customized to match your preference.


*GP3700F only

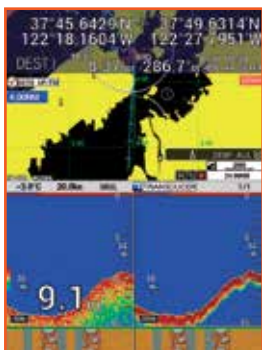


Plotter and Dual Frequency

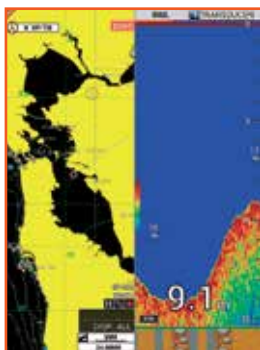

Plotter and Single Frequency

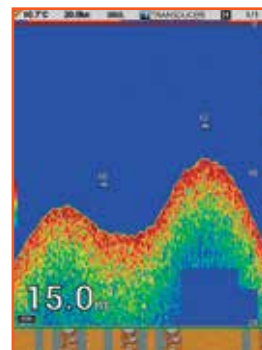


Single Frequency Fish Finder

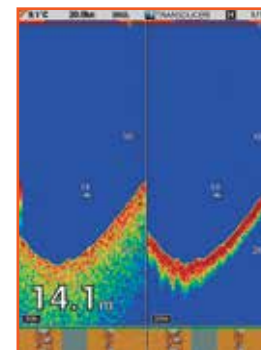


Dual Frequency Fish Finder

ACCU-FISH™ and Bottom Discrimination Modes*


Graphic Mode:



Probability Mode:



Single Frequency Mode

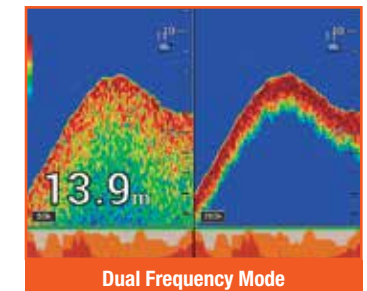

Dual Frequency Mode

*NOTES:

Use at a depth of 17 ft – 325 ft. Use transducer in transom mount or thru-hull mount (Requires use of compatible dual-frequency transducer). To show a consistent display of the actual bottom, set the range display of the Fish Finder screen to "auto". Enter the ship's draft value. Use a ship speed of ≤ 10 kn. In some instances, bottom component indicated on the display may differ from the actual bottom structure.

Fish Finders



Model FCV-600

>>> Spec P118

5.7" Fish Finder with TruEcho CHIRP™

Model FCV-800

>>> Spec P118

8.4" Fish Finder with TruEcho CHIRP™

KEY FEATURES:


- 5.7" (FCV-600) or 8.4" (FCV-800) Color LCD Display
- Drives either a TruEcho CHIRP™ or CW transducer
- Drive a CHIRP and CW Transducer simultaneously (FCV-800 only)
- New Sunlight and Yellow color palettes offer unbeatable daylight visibility - particularly useful for those with color blindness
- New Color Range Expansion displays returns from more discreet signal frequencies for unbeatable target separation
- RezBoost™ signal processing produces a picture up to 8 times clearer
- Greater detail of baitfish, gamefish, and structure
- New wireless connection of second display
- Heave correction with Satellite Compass
- New preset frequency modes – 3 settings
- New user-adjustable window size
- New TLL Output (FCV-800 only)
- New Bottom Hardness output (FCV800 only) for TZ Professional or OLEX units when using CW transducers
- New mode combining both TruEcho CHIRP™ returns with CW-only features such as Bottom Discrimination and ACCU-Fish when using two appropriate transducers (FCV-800 only)

Dual transducer ports drive both CHIRP and CW channels, giving you the best of both worlds!




CHIRP and CW - The Best of Both Worlds!

The FCV600 can drive a CHIRP or dual-frequency CW (Continuous Wave) transducer, allowing you to configure the Fish Finder to suit your specific needs. This cutting-edge technology changes the game for anglers of all levels, making locating and catching fish easier than ever. The dual transducer ports of the FCV800 offer the best of both worlds. Desirable CW-only features such as Bottom Discrimination and Furuno's ACCU-FISH™ fish size assessment tool can be combined with TruEcho CHIRP's frequency-modulated signal to deliver those Furuno features while providing better resolution for targets on the screen.



Bottom Discrimination Functionality

The Bottom Discrimination function indicates whether the bottom is composed mainly of rocks, gravel, sand, or mud. This provides you with valuable information that helps you locate rich fishing grounds and boost your catch of the day. The probability display mode shows the most probable bottom composition in graph form, while the graphic display mode does the same graphically or using four colors.

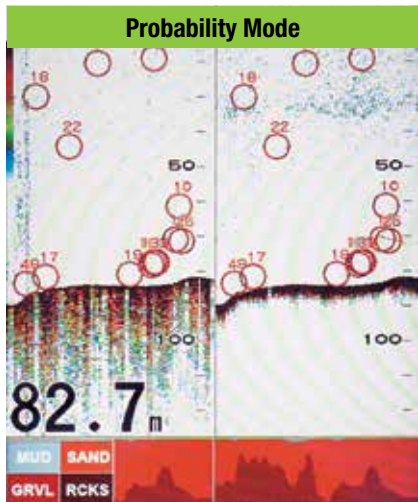

Probability Mode:

- Rocks
- Sand
- Gravel
- Mud

Graphic Mode:

- Rocks
- Sand
- Gravel
- Mud


Bottom Hardness Export (FCV800 only)

The FCV800 can output bottom hardness data to external plotters, such as TZ Professional, making this model ideal for fishing operations that rely on the accumulated bottom hardness information that helps determine the best areas to locate their target species.


Color Range Expansion

Color Range Expansion broadens the range of discrete signals detected and paints them in different colors. With conventional color ranges, echoes from the seabed and fish may be shown in a similar color, making it a challenge to distinguish fish from the bottom. With Color Range Expansion, the range of identifiable echoes is expanded so you can intuitively identify bottom fish from the seabed. Reefs, structure, and fish near the seabed are shown in slightly separated colors, making it easy to tell structure from fish at a glance and spot elusive fish targets you otherwise may have missed.

Color Expand Off

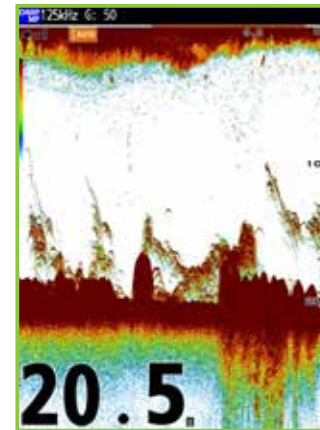


Color Expand On

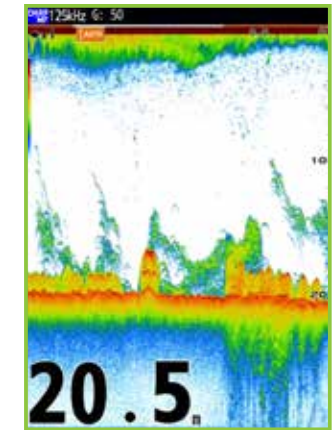

New Daylight-Friendly Color Palettes

Two new color palettes, Sunlight and Yellow, offer greatly improved visibility in bright daylight.

Sunlight




Yellow




Wireless Connectivity

A second display can be installed to show the echoes and nav data from the FCV-600 and FCV-800 via wireless network, so you can monitor the underwater situation from the stern or bow while fishing.

Fish Finders

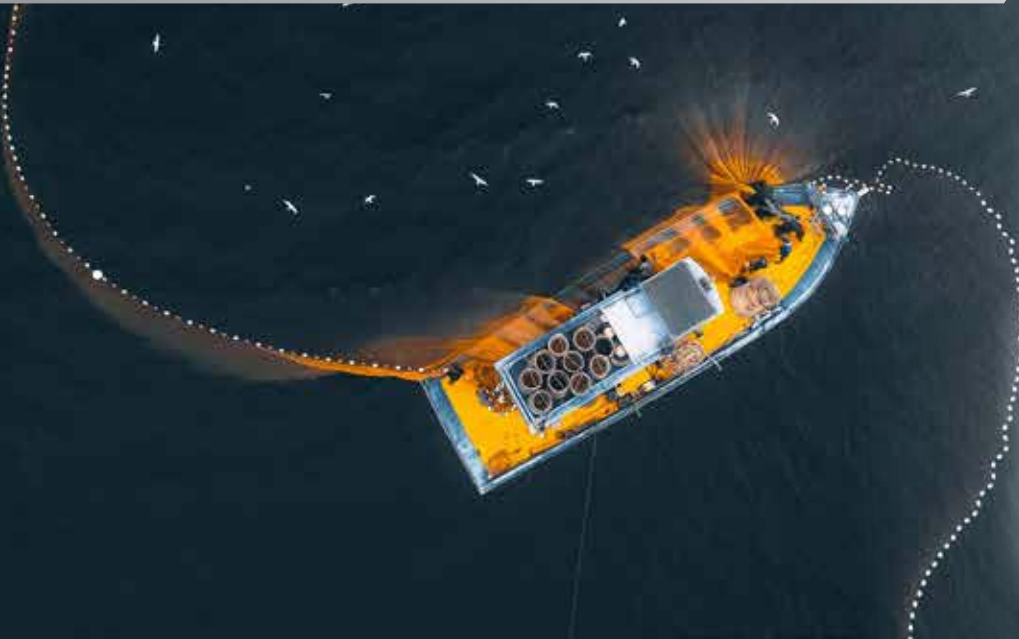

With Quick Gain control, changes you make to the gain setting are applied not only to new echoes, but also to all past echoes on the screen.

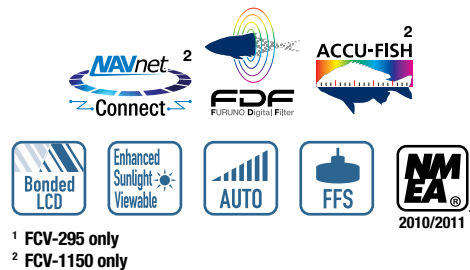

¹ FCV-295 only
² FCV-1150 only

Model FCV-295

▶▶▶ Spec P118

10.4" Color LCD Fish Finder

KEY FEATURES:

- Post-processing gain control applies changes to gain setting for all existing returns on the display
- White Edge feature for enhanced bottom discrimination
- Furuno Digital Filter delivers crystal clear target presentation
- Furuno Free Synthesizer (FFS) allows for adjustable operating frequency
- Available Heaving Compensation provides stable echo presentation even in rough seas (FCV-1150 only)*
- Unique fish size analyzing function ACCU-FISH™ mode (available when FCV-1150 is connected with CA50/200-1T transducer)
- Output bottom hardness to OLEX and TimeZero (requires CA50/200-12M or CA50/200-1T transducer)
- Depth information can be output to TimeZero and PC navigation suites for 3D mapping

*Requires appropriate sensors


Model FCV-1150

▶▶▶ Spec P118

12.1" Color Fish Finder


Optimized with Furuno Digital Filter (FDF)

Furuno Digital Filter optimizes the gain to obtain highly defined images of underwater conditions. The FCV-295 and FCV-1150 can clearly show target fish close to the seabed. The digital filter also eliminates noise to deliver sharp and detailed echo presentation, achieving detection of fishing reefs and even individual fish with absolute clarity.

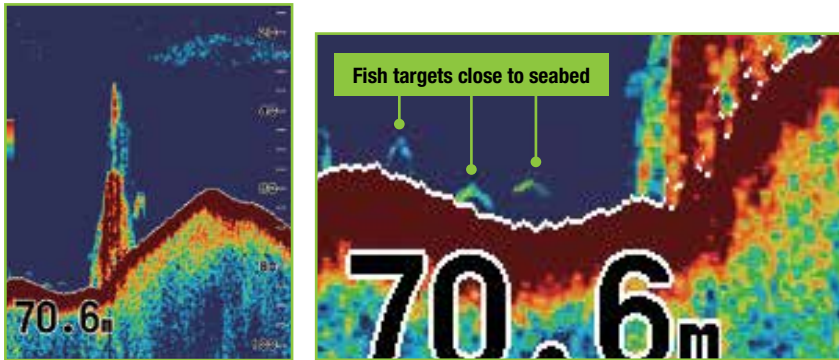


Post Processing Gain Control

With Quick Gain control, changes you make to the gain setting are applied not only to new echoes, but also to all past echoes on the screen. This lets you compare past and current echoes under the same gain setting. Because the changes are applied to both new and existing returns, you can quickly and easily determine the right Gain setting for your conditions.

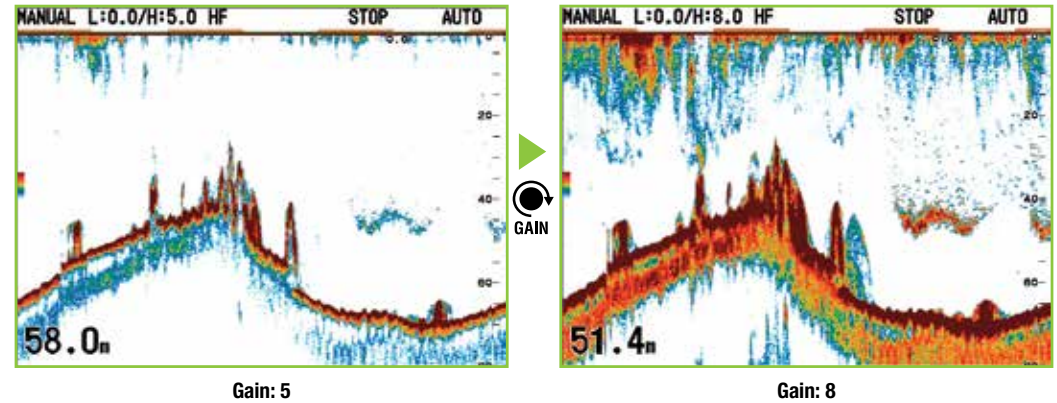

Discern Between Structure and Fish Returns

The top of the seabed is displayed in white to easily discern seabed structure from bottom fish returns. While conventional bottom discrimination function (i.e.: White Line) is applied to the strongest echoes, the White Edge function enhances the separation between bottom fish and the seabed.

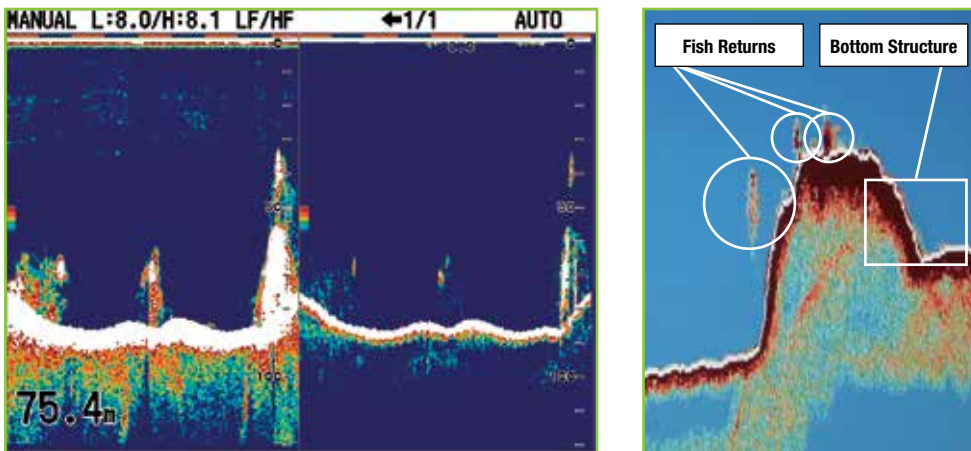


White line

White edge

Heaving Compensation (FCV-1150 Only)

Even in rough sea conditions the FCV-1150 compensates for heaving, presenting a display without undulations caused by the sea conditions. Furuno SCX-20/21, SC-33, SC-70, or SC-130 Satellite Compass™ required.

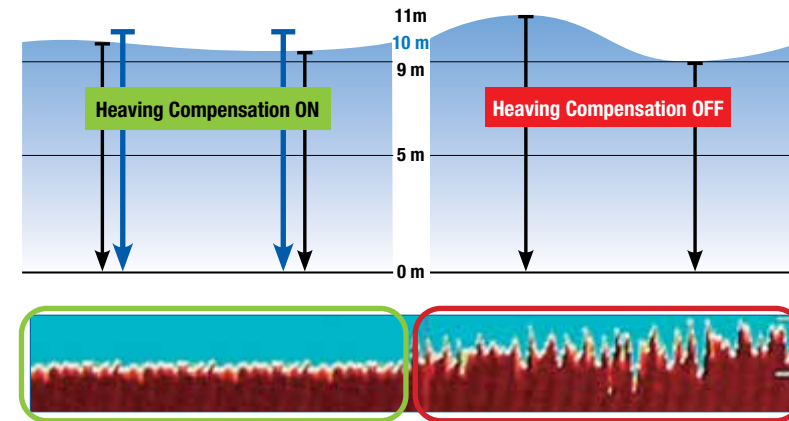

Fish Finders


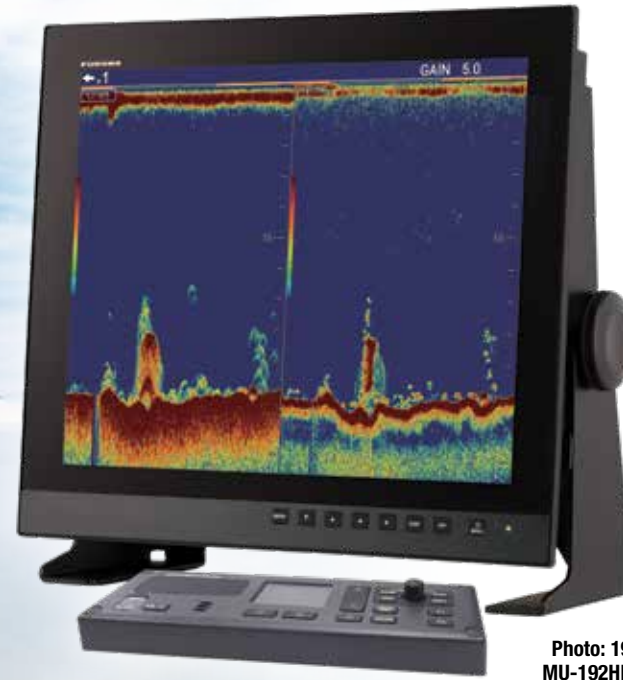


Photo: 19" Marine Display MU-192HD (Optional supply)

The FCV-1900 series ensures excellent target separation and clarity thanks to a high Pulse Repetition Rate. You will see individual targets and fish reefs like never before.



Model FCV-1900

▶▶▶ Spec P120

Black Box Hi-Resolution Dual Frequency Fish Finder

KEY FEATURES:

- Bottom Discrimination display provides estimate of seabed composition*
- Post-processing gain control applies changes to gain setting for all existing returns on the display
- Capture and review videos and screenshots
- Furuno Free Synthesizer (FFS) transceiver design allows use of user-selectable operating frequencies (15kHz to 200kHz)

Feature	Model		
	FCV-1900	FCV-1900B	FCV-1900G
Fish Size Histogram	NA	NA	✓
Transmission Mode**	TruEcho CHIRP™ Mode*	NA	✓
	Standard Mode	✓	✓

* TruEcho CHIRP™ compatible transducer required

** The transmission mode is set by the installer



Photo: 19" Marine Display MU-192HD (Optional supply)

Model FCV-1900B

Spec P120

Black Box Hi-Resolution TruEcho CHIRP™ Fish Finder

KEY FEATURES:

- High resolution echoes from shallow to deep waters made possible with TruEcho CHIRP™ technology



Photo: 19" Marine Display MU-192HD (Optional supply)

Model FCV-1900G

Spec P120

Black Box TruEcho CHIRP™ Fish Finder With Unique Fish Size Indicator


KEY FEATURES:

- High precision fish size feature provides approximate fish size in graph form, even in dense schools of fish
- TruEcho CHIRP™ technology delivers significant advancements in signal clarity and target definition
- Side Looking Mode, see targets and bottom structure below your vessel



Multiple Functions For Improved Efficiency

Display up to four different frequencies together in a compact and easy way by connecting a required network Fish Finder. Since there is no need to install additional displays, this function is especially useful for small vessels. Display two different gain settings simultaneously for increased visibility in changing water conditions and when changing vessel speed. With the press of a button you can activate the scroll back function to instantly review past echoes. Up to two previous screens can be viewed.

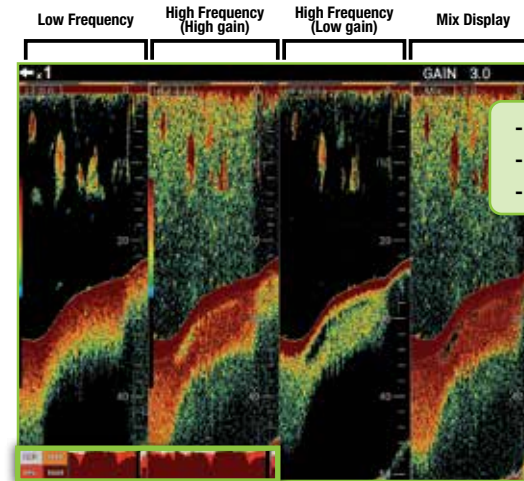


- Simultaneous gain setting for increased visibility
- Display up to four different frequencies
- Scroll Back Function to see where you've been


Connect a BBDS1 Network Fish Finder for Bottom Discrimination.

Increased Transmission Rate For More Detail

In low frequency, fish are displayed in a distinct boomerang shape. In high frequency, you can clearly see the amount of detail displayed. Fish reefs can also be seen in much greater detail.

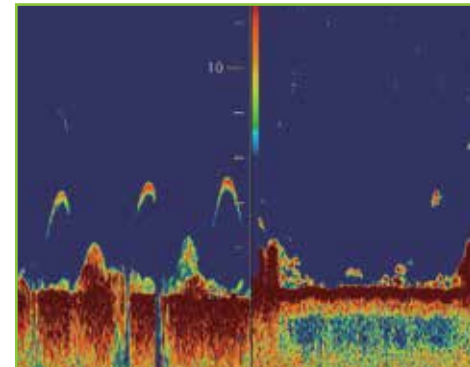

Individual fish

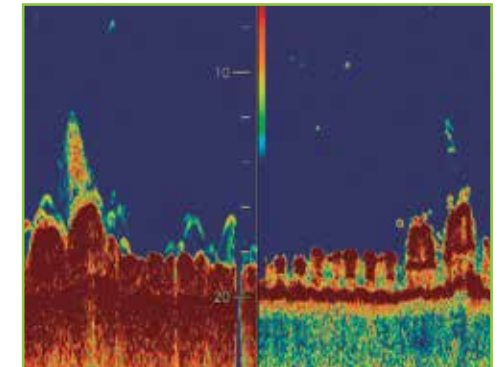

Fish reef



Model CH-500

▶▶▶ Spec P122

12.1" Searchlight Sonar

KEY FEATURES:



- Incredibly fast training speed, your best ally for finding fish 360° around your boat in only 3.1 seconds when set on 24° scanning step and at 20 m range
- 6 tilt angles for training speed adjustment according to user's needs:
- Display directly to TZtouchXL/TZTouch3 MFDs with Video Converter Kit
- 11 display modes selectable for every situation
- HD LCD with 1024 x 768 XGA* resolution for detailed echo images and clear view
 - * The display is optimized for this resolution
- Quick Gain Control allows instantaneous gain adjustment
- Built-in motion sensor provides a stabilized target presentation in rough sea conditions
- Audible target detection freeing the user from continuous watch of the display (Requires Loudspeaker option)
- Frequency: 60/88/150/180/240 kHz
- Also available in Black Box configurations

*Find fish all around and under
your vessel with CH-500/600
Searchlight Sonar.*




Horizontal and Vertical Scanning Modes

Searchlight Sonar gives you the ability to search both horizontally and vertically. With horizontal search, you can specify the tilt angle to an area around your boat. With vertical search, you can obtain detailed underwater conditions at any bearing. Combine the two to make your cruising safer and your fishing operation more productive.

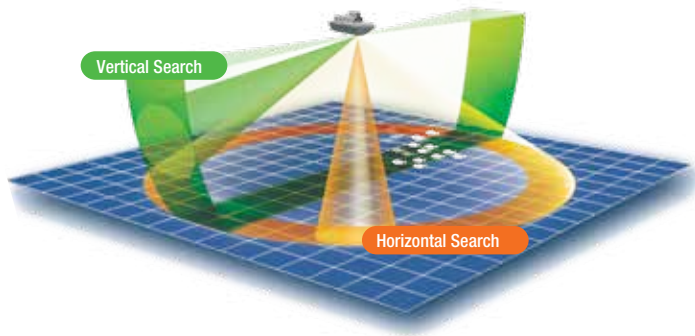

Horizontal

A full circle scan (360 degree), provided by a rotating transmitter, detects fish schools around the vessel (Horizontal scan zoom mode also available).




Vertical

Vertical scan paints the bottom profile within a user-specified vertical plane in any direction.



Vertical Full-Circle A-Scope





A-Scope mode shows the last detected echoes with one single color. The more opaque the color, the stronger the echo.



Echo Sounder

When fully retracted, the transducer tilted to 90 degrees can locate fish schools and seabed straight down at high speeds.

Different Display Combinations



Stabilized Target Presentation In Rough Sea Conditions



The CH Series is the first of its class to have an integrated stabilizer in its core. In rough seas, ships tend to move in every direction and its inclination can change, creating echo distortions which cause inaccurate data display. The role of the stabilizer is precisely to compensate for those negative effects and provide accurate data to the user. Thanks to the built-in stabilizer's compensation, the CH Series is able to detect fish that didn't appear originally with the non-stabilized echo.



Stabilizer OFF



Stabilizer ON



Audible Target Detection*

The CH Series features fish and target audio signals depending on the nature and the size of the detected object. Whether there are air bubbles, big or small fish schools, and seabed, the emitted sound is different. This feature shows its usefulness during long sea trips, as it frees the user from continuously watching the screen. *Requires Loudspeaker

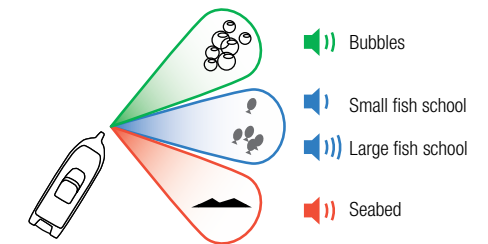


Figure out intuitively what is detected by differentiating their sound with the audible target detection



*Furuno Sonar technology
delivers a more productive
fishing operation.*



Model CH-600

▶▶▶ Spec P122


12.1" Dual Frequency Searchlight Sonar

KEY FEATURES:

- Two frequencies combined to increase your chances of finding fish (60/153 kHz or 85/215 kHz)
- Incredibly fast training speed, your best ally for finding fish 360° around your boat in only 3.1 seconds when set on 24° scanning step and at 20 m range
- HD LCD with 1024 x 768 XGA* resolution for detailed echo images and clear view
* The display is optimized for this resolution.
- Quick Gain Control allows instantaneous gain adjustment
- Audible target detection freeing the user from continuous watch of the display (available with optional Loudspeaker)
- Also available in Black Box configurations
- Display directly to TZtouchXL/TZTouch3 MFDs with Video Converter Kit


Advanced Signal Processing for High-Resolution Output

Powerful signal and image processing based on a unique interpolation technology provides high resolution images. Even if the fish are located near the seabed, different echoes are clearly shown and easy to understand. Additionally, the high resolution echo display gives crisp, clear echoes, which reduces eye strain.

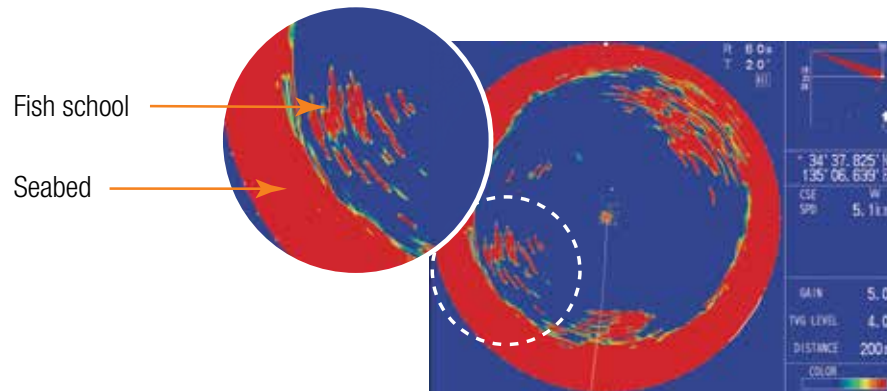


Ultra-Fast Scanning Speed

This Searchlight Sonar provides 6 scanning step variations (6, 12, 15, 18, 21, 24) easily switchable for high-precision or high scanning speed that can cover 360° in a couple of seconds, depending on the distance of the echoes. Due to its scanning speed, the CH Series can be used at high speeds and still cover a large zone at the same time.

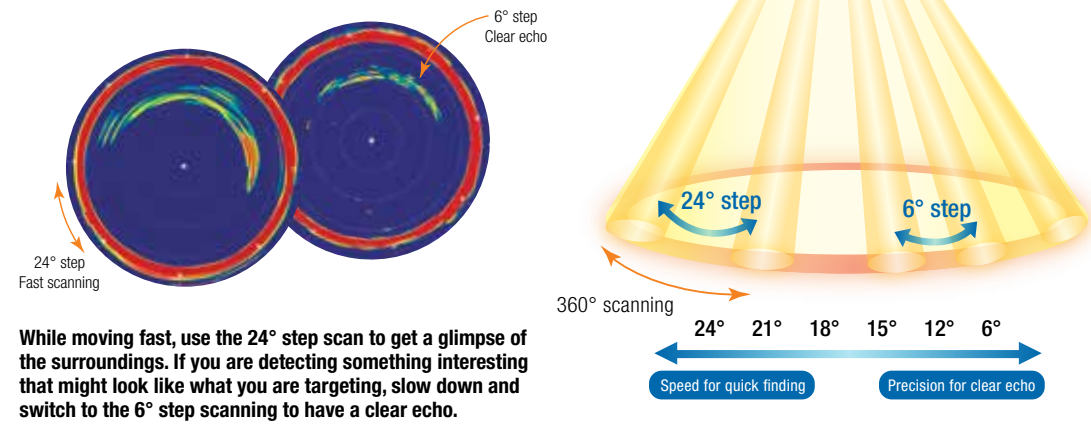

Dual-Frequencies Reveal Sardines and Other Baitfish


With the Horizontal Dual-Frequency mode in split view, both low and high frequency are used and displayed at the same time. By comparing echo shapes at low and high frequency, it becomes possible to ascertain the actual presence of the fish, even the small ones. Both low and high frequency echoes are overlaid to only show the echoes that matter to the fisherman. It then becomes easy to identify species regardless of their distance to the ship.

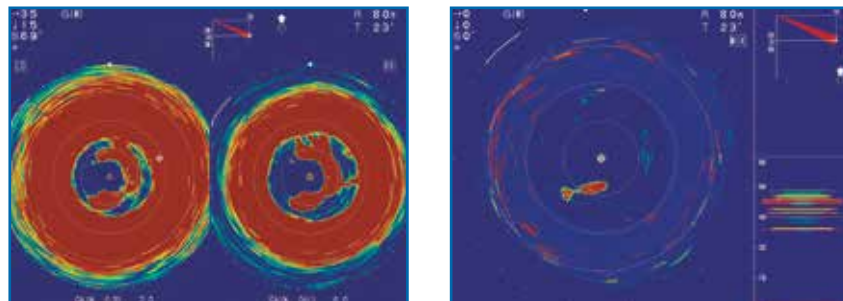

Horizontal Dual-Frequency Mode
Pictured: Echoes of Sardine Schools


Horizontal Mix Display Mode
Pictured: Echoes of Baitfish

Horizontal Scan




A full circle scan (360 degree), provided by a rotating transmitter, detects fish schools around the vessel. (Horizontal Scan Zoom mode also available)


Horizontal (Zoomed)



Vertical



The Vertical scan paints the bottom profile within a user-specified vertical plane in any direction.



Echo Sounder

When fully retracted and with the transducer pointed straight down, the Sonar can be used as a fish finder for seabed and fish schools



Photo: 15" Marine Display
MU-152HD (Optional supply)

Optional remote controller
provides armchair control of
range and gain settings

Model CSH-8L MARK-2

▶▶▶ Spec P123

Black Box Omni Sonar

KEY FEATURES:

- Full-Circle Omni Sonar detects and instantaneously displays schools of fish and underwater conditions
- Black Box configuration allows for a space-saving, flexible installation
- Video converter kit provides networked video input to TZtouchXL & TZtouch3 MFD
- Variety of available monitors built to meet the needs of tournament vessels
- Vivid 16-color display assists in recognition of seabed structure, as well as concentration/distribution of fish schools
- CSH-8L MARK-2 scans a full 360 degrees in half a second

Model CSH-5L MARK-2

▶▶▶ Spec P123

Black Box Omni Sonar

- Various fishing and navigation data* keep the operator aware of fishing and navigation conditions *Requires appropriate sensors
- Four user-programmable function keys for quick set up according to fishing conditions or specific functions
- Second display and control unit can be easily connected for a remote second station
- High-power transmitter ensures reliable operation under any conditions
- Narrow beamwidth and enhanced target identification capability
- Transducer frequency:
 - CSH-5L MARK-2: 55 kHz or 68 kHz
 - CSH-8L MARK-2: 85 kHz

Scan a full

360 degrees twice

in a second!




Winner of the 2021, 2022
& 2023 NMEA Marine
Specialty Award


About Omni Sonar

The transducer arrangement of an Omni Sonar consists of layers of elements, each pointed in a slightly different direction, which allows the Sonar to transmit 360 degrees instantaneously. There is no need to rotate the transducer. On a 1,000 ft range, the CSH-8L MARK-2 Sonar updates the display 360 degrees every 0.54 seconds, while the conventional PPI Sonar takes a full 32 seconds to train full circle under the same range/conditions. Because this Sonar scans so quickly, it greatly improves the fishing operation, especially when searching for or following fast swimming fish, and lessens the chance of missing important changes in underwater conditions.

Detection Image of Omni Sonar

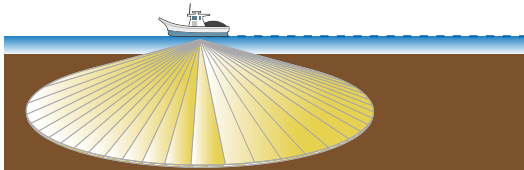


Detection Image of Conventional PPI Sonar




Omni Sonar shows the actual situation 360 degrees around your vessel, and gives all the necessary information as needed. No more blind areas to consider, allowing the operator to concentrate on the tilt, range, fishing area, etc.

The Winning Fisherman's Secret Weapon!


The CSH-5L MARK-2/CSH-8L MARK-2 is a Full Circle Omni Sonar that rapidly detects and displays individual gamefish and schools of baitfish, showing your catch in real time before they're in the spread. A game changer for high-end tournament vessels, midwater trawlers, purse seiners, or anyone desiring more successful fishing expeditions. At 85 kHz, the CSH-8L MARK-2 is a mid-frequency Sonar. Its narrow beamwidth coupled with its enhanced target identification capabilities make it ideal for searching near the vessel or in shallow waters.

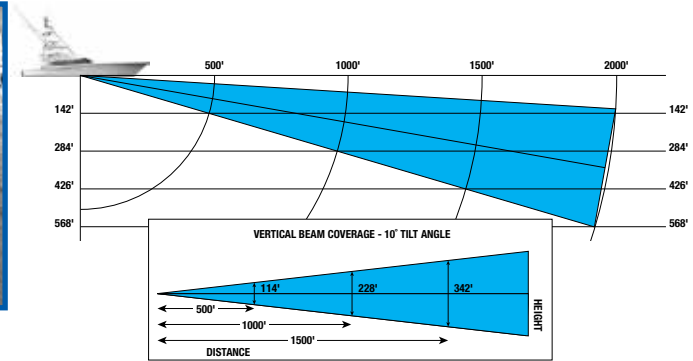

Selectable User-Friendly Operating Modes

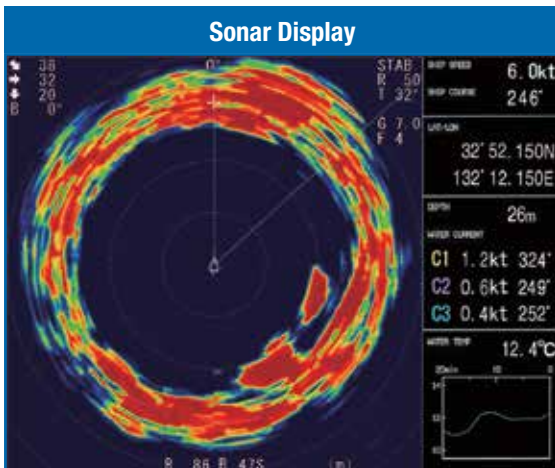


Navigation data can be displayed in the text window, with connection of appropriate sensors. This mode is useful for detecting and tracking schools of fish.

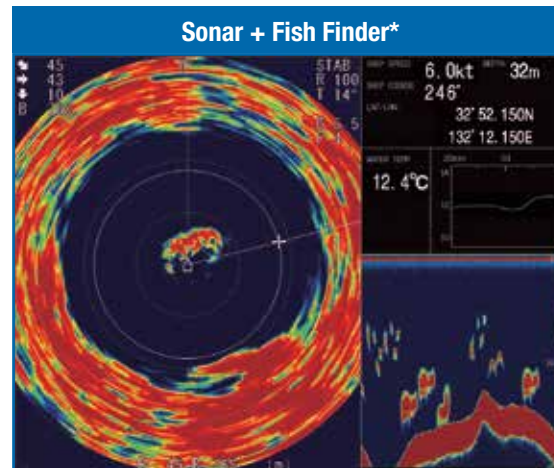

The Sonar picture appears on the left and the signal fed from the Fish Finder at the lower right side of the screen. This mode is suitable for judging fish school concentration.

* Interface with Fish Finder required.

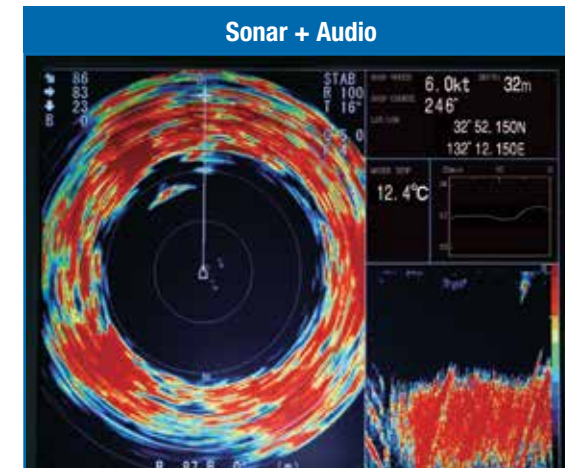

Sonar picture appears on the left and the audio display at the lower right side of the screen. This mode is useful for analyzing echoes in a desired area.

Multibeam Sonars



Model DFF-3D

►►► Spec P97

Network Multibeam Sonar

KEY FEATURES:

- Outer beam detection range is up to 200 m in a 120-degree swath port to starboard*
- Main beam deep water penetration directly under the boat is approx. 300 m*
- Easy installation with a variety of transducer options
- Customize the display according to your needs:
 - Depending on the situation and preference, a combination of screen modes can be displayed
- Full control of all features using TZ Professional (Windows OS for PC)


DFF-3D MULTIBEAM SONAR

Frequency	165 kHz
Range Scale	Up to 1,200 m
Detection Range	200 m* (Side beam best performance) 300 m* (Main beam directly under boat)
Transducer	800 W

* Depending on bottom type and water conditions.

PBG (Personal Bathymetric Generator)

Discover new fishing hot spots as you build your own realistic 3D bathymetric charts of the seafloor. Charts are automatically saved directly to your TZtouchXL/TZtouch3/TZT2BB so you can go back to your favorite new spots again and again. Highly accurate spot soundings are also generated directly from your PBG recordings. These spot soundings display measured depths at specific points in easy-to-read numbers, helping you identify the depths at a quick glance.

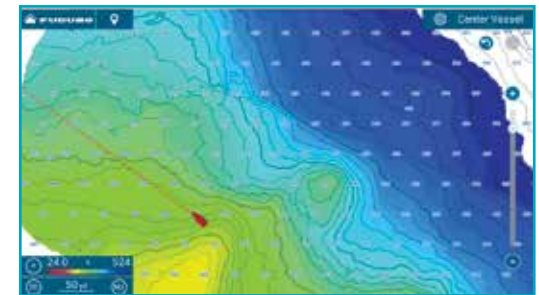


PBG spot soundings clearly shows depth numbers

Follow-It Feature

Leverage your recorded PBG data like never before. Now you can create a constant depth route from the PBG data, allowing you to select Follow-It from the menu and send it to your NAVpilot Autopilot. Then the NAVpilot will follow the depth route all the way around a ridge or trough. This is particularly useful when you want to keep your bait at a certain depth while trolling without having to adjust your reel.

(Software ver. 3.5 or higher required for TZtouch3; ver. 9.5 or higher required for TZT2BB.)

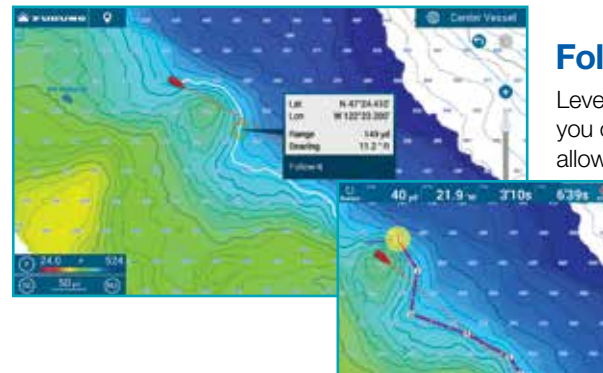


2018-2023

A Transducer Option for EVERY Vessel

With the DFF-3D, there is a transducer to meet the needs of any installation. Thru-Hull, Transom Mount, Cavity Mount, and Pocket Mount transducer options are available, so the DFF-3D can be utilized on virtually any vessel, with built-in motion sensors to compensate for pitch and roll. There are even combo transducers that combine DFF-3D with either CHIRP or dual-frequency 50/200 kHz elements, so your Multibeam Sonar can be used in conjunction with a TruEcho CHIRP™ Fish Finder or the built-in TZtouch Fish Finder, requiring only a single transducer!

Transducer* (with motion/temperature sensor)



B54 Thru-Hull Mount Transducer





TM54 Transom Mount Transducer


* For a complete list of transducers, including combo transducers, see page 117.

Understand Fish Distribution At A Glance

You may think you've seen 3D Multibeam Sonar in action, but many of those images begin disappearing as you approach 60 meters (200 feet). Furuno's DFF-3D takes 3D Fish Finding to new depths of over 300 meters (980 feet), with Side Scanning over 200 meters (650 feet). See fish and bottom structure as you've never seen them before, at depths previously unfathomable. The DFF-3D turns your NavNet TZtouchXL or TZtouch3 MFD into a Multibeam Sonar that can see 120-degrees port to starboard, allowing you to view the depth and direction fish schools are moving, while displaying the seabed condition in real time.

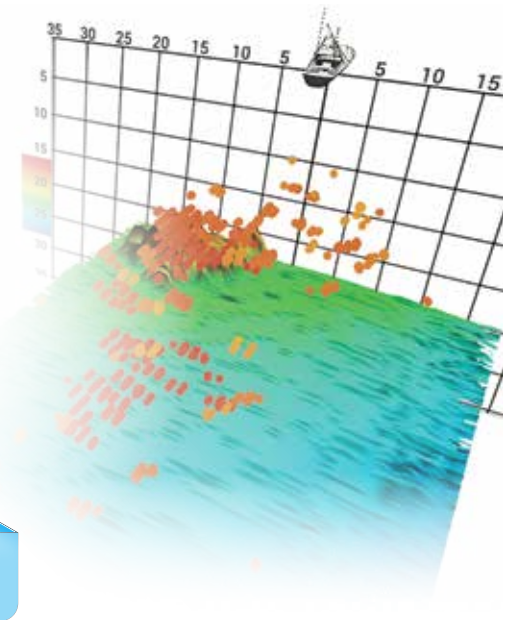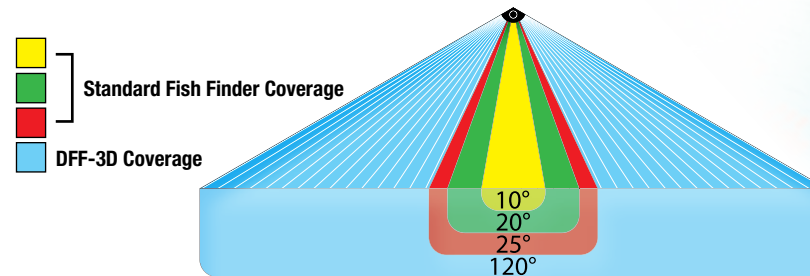


An Innovative Tool for Exploring the Water Column and Seabed:

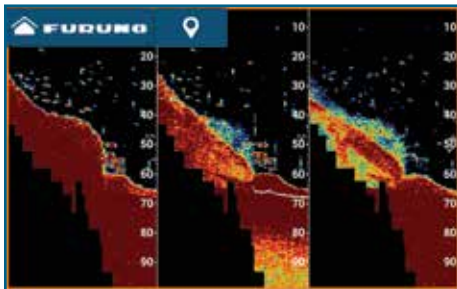


Triple Beam Sounder

A single beam (middle) or triple beam (middle, Port and Starboard) Fish Finder image are displayed simultaneously. The Triple Beam display helps to understand the depth of fish targets and seabed condition under the boat and to port and starboard, as well as distribution of fish under the boat and to each side. Each beam angle and beam width are selectable.

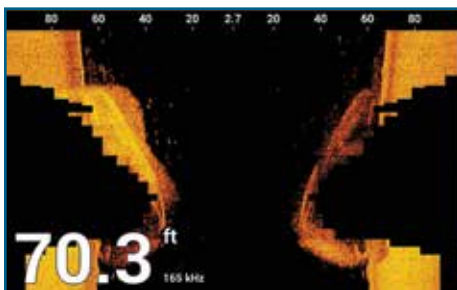


Side Scan

Side scan clearly displays the shape of structure as a high-definition image to both port and starboard. It is suitable for searching the seabed and understanding the sea floor structure. Outer beam detection range is 200 meters (over 650 feet) in a 120-degree swath port to starboard, a distance you've never seen before!

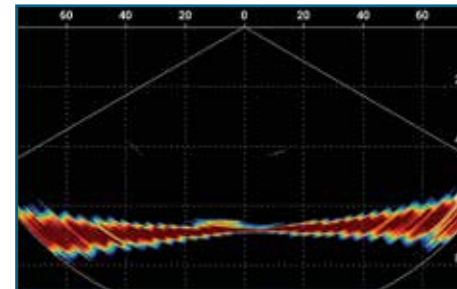

Cross Section

Cross section displays the real-time water column echo in 120 degrees port to starboard. This mode aids in instantly understanding the distribution of bait fish and the water column condition, with a detection range of over 650 feet, depending on bottom, water, and installation conditions.

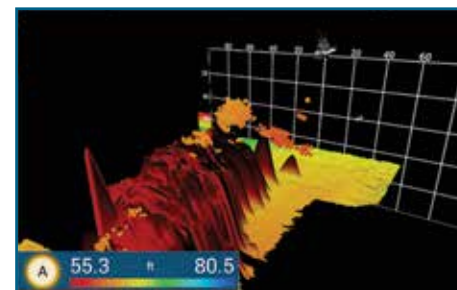

3D History

The 3D sounder history provides an intuitive and easy to understand 3D image of the seafloor, along with fish school icons. This mode is useful in a variety of situations, such as selecting a fishing hot spot and assessing the seabed condition.

Multibeam Sonars



Model S3/Sr3/F3/F3X/F3XL/W3/W3Pi

▶▶▶ Spec P124

WASSP Series Multibeam Sonar

KEY FEATURES:

- Cost-effective solution for multiple applications
- Choose your own functions with new license options**
- TimeZero compatible with optional license
- The 3rd generation WASSP F3 is designed for fishing and mapping operations, allowing you to maximize your catch while minimizing your time at sea
- The entry-level WASSP S3 for mapping and survey is now more sensitive, with a higher dynamic range and lower noise level
- Built for fishing and mapping, the WASSP F3X delivers mapping at over 500 meters, and sounding at over 550 meters depth
- Built for fishing operations, the WASSP F3XL shows fish targets at over 850 meters, with bottom detection at over 1,000 meters depth
- Built for surveying, the WASSP Sr3 is a mid-level MBES for professional ocean survey and mapping operations that includes a new RPM (real-time processing module)
- Built for wireless operations, the WASSP W3 is optimized for delivering real-time information from tenders to the mothership's bridge
- WASSP W3Pi All-In-One solution contains everything needed to begin mapping the seabed
- Save bathymetric recording data directly into standard CDX user interface software

- Visit www.wassp.com for complete details

WASSP S3/Sr3/F3/F3X/F3XL/W3/W3Pi	
Frequency	S3, F3, and F3X: 160 kHz, 90-190 kHz F3XL: 80 kHz W3: 90-190 kHz
Range Scale	Up to 1,000 m*
Detection Range	Up to 850 m*

* Depending on bottom type and water conditions.



**NEW LICENSE OPTIONS

TZ Pro Interface
OLEX Interface
Backscatter/Bottom Hardness
Side-Scan
Water Column Analysis
XYZ Position
Hypack, BeamWorx and other 3 rd -party plugins


wassp[®]
MULTIBEAM

SEE IT ALL




New Easy-to-Use Interface


The F3 Series introduced the new simplified software “WASSP CDX” for control, visualization, and data management while still providing a comprehensive set of functions to meet the most demanding fishing requirements.

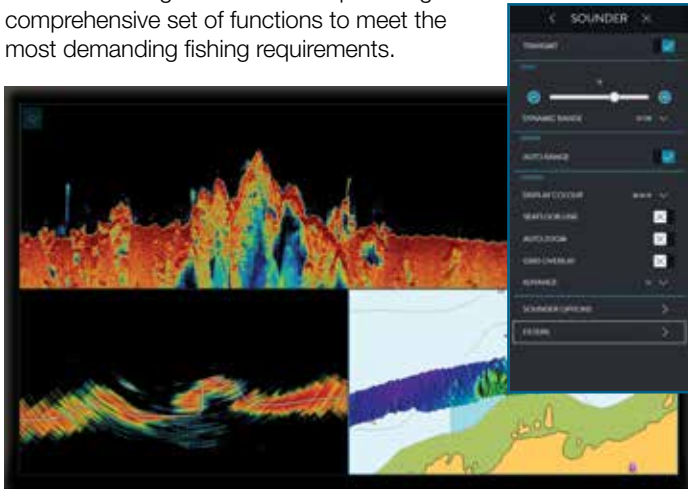


Useful Presentation Modes




3D Fish Density Overlay



Fish Finder



2D Mapping to 500m



Backscatter (Bottom Hardness) at 200m


New Software Seamlessly Blends Data

Through pulse compression and advanced signal processing, WASSP delivers accurate, high-quality data in even the most demanding marine environments. Utilizing the new Version 4 CDX software, all new data gathered is seamlessly blended with previously recorded seabed information, resulting in beautiful, accurate mapping with no missing details or misaligned edges from multiple passes. Using the new CDX software algorithm, old and new data can be used to create an enhanced picture of current conditions.



Generate Your Own Personal Multibeam Chart

The WASSP F3/S3 and F3X series is set to revolutionize inshore fisheries and survey/mapping operations. With Wideband CHIRP technology scanning a 120-degree swath port to starboard using either 112 or 224 beams, WASSP delivers in the most demanding marine environments, each and every time.

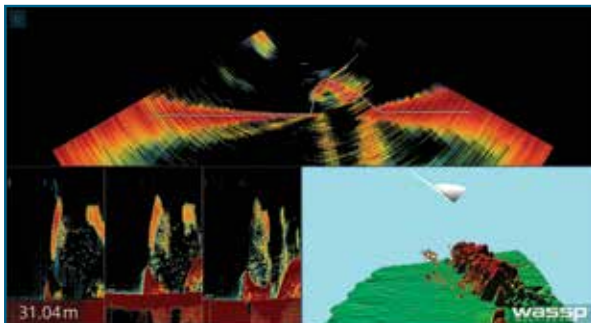

All-in-One Versatile DRX Transceiver Is Ready for Future Advancements

This innovative all-in-one “Black Box” is not just a robust hardware platform but also introduces cutting-edge technical innovations and incredible versatility for finding your catch, opening up countless new possibilities for your fishing operations.



Wireless Link to Tender Provides Safe Passage In Poorly Charted Areas

WASSP’s next generation DRX based Multibeam Sonar has taken the important step of going wireless. This wireless link technology allows RHIBs or tenders to be deployed from larger surface vessels to map seafloor topography, assimilate sub-surface data, and provide a rapid area assessment that is wirelessly transmitted back to the “mothership” in a 3D animation. The result is real-time delivery of unparalleled underwater situational awareness to the ship’s bridge and its decision makers.




Autopilots



NAVpilot



NAVpilot remarkable self-learning, adaptive software is developed by collaborative works between FURUNO and FLSI.

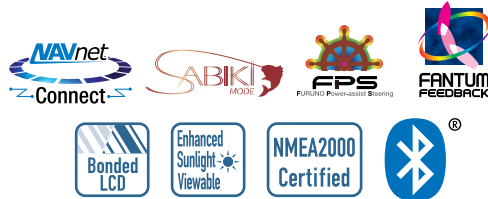

Kick back, relax, and let NAVpilot steer you to your destination!

Model NAVpilot 300

▶▶▶ Spec P126

Self-Learning Autopilot with Gesture Controller

KEY FEATURES:

- Self-Learning and adaptive software; each time the boat goes to sea, the software learns about sea conditions and calculates the best adjustment for smooth steering
- Fantum Feedback™ offers simplified installation (no need for physical rudder feedback unit) while delivering enhanced steering control)
- Volvo Penta IPS, Yanmar, and Dometic Seastar EVCS compatible
- Easy installation and smart network-based system configuration
- Waterproof Processing Unit (IP55) and Control Unit (IP56)
- SAFEHELM2 and POWER ASSIST bring unrivaled steering control and comfort at the helm
- Selectable “Economy” and “Precision” Navigation Modes combine adaptive technology, providing fuel and power savings of 2.5% or more*
- “Precision” provides for tighter course keeping, within 0.01 NM of the set course
- Perfect for inboard/outboard power boats (NAVpilot 300/711C) and sailboats (NAVpilot 711C only)
- Autopilot control available from NavNet TZtouchXL/TZtouch3/GP1871F/1971F
- FishHunter™ Drive delivers new control features for boaters utilizing select Suzuki Outboards (NAVpilot 300 only)

*Based on Furuno testing and “Scenarios for a Clean Energy Future 2000” - U.S. Department of Energy (<https://www.nrel.gov/docs/fy01osti/29379.pdf>)


Model NAVpilot 711C

▶▶▶ Spec P127

Self-Learning Autopilot


Just PUSH, POINT, & RELEASE (NAVpilot 300 only)

The Gesture Controller is a revolutionary and unique way to steer your boat remotely. By using Bluetooth signals, it is possible to control the Autopilot from anywhere on the boat within 32 feet. Just push, hold the button, point to the desired heading and release to let the Autopilot redirect the boat!

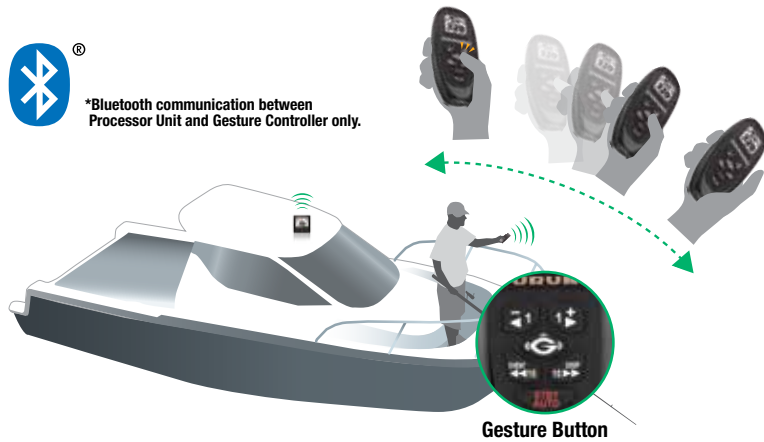


Wide Variety of Graphic Displays Available

Customize the data to suit your own preferences with digital or analog graphics. The NAVpilot 300 and NAVpilot 711C feature a color day/night graphic display, giving you much better sunlight visibility during the day, while not affecting your night vision when the sun goes down.

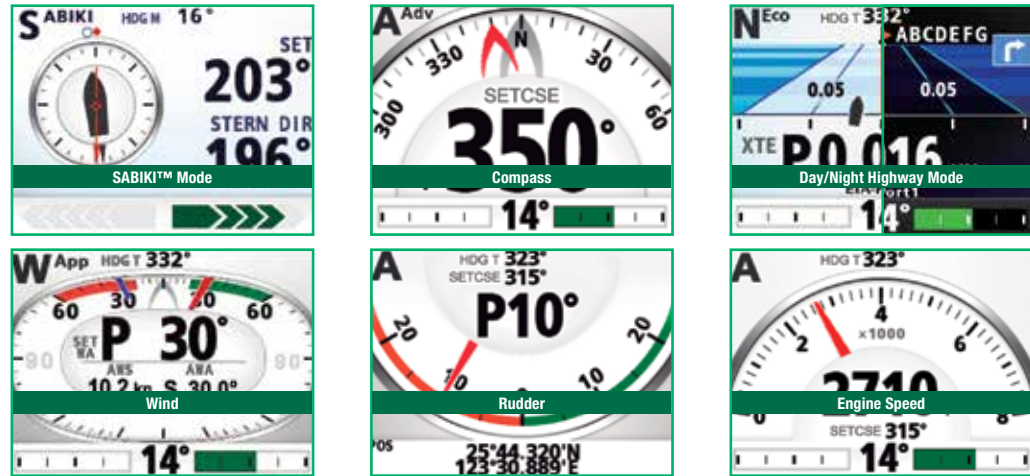

SABIKI™ Mode For NAVpilot 300 and NAVpilot 711C

With SABIKI™ mode your NAVpilot 300 or NAVpilot 711C have become even more capable than ever before. And the best thing is, there is no need to install additional hardware or sensors. SABIKI™ mode is available only on vessels with outboard engines.

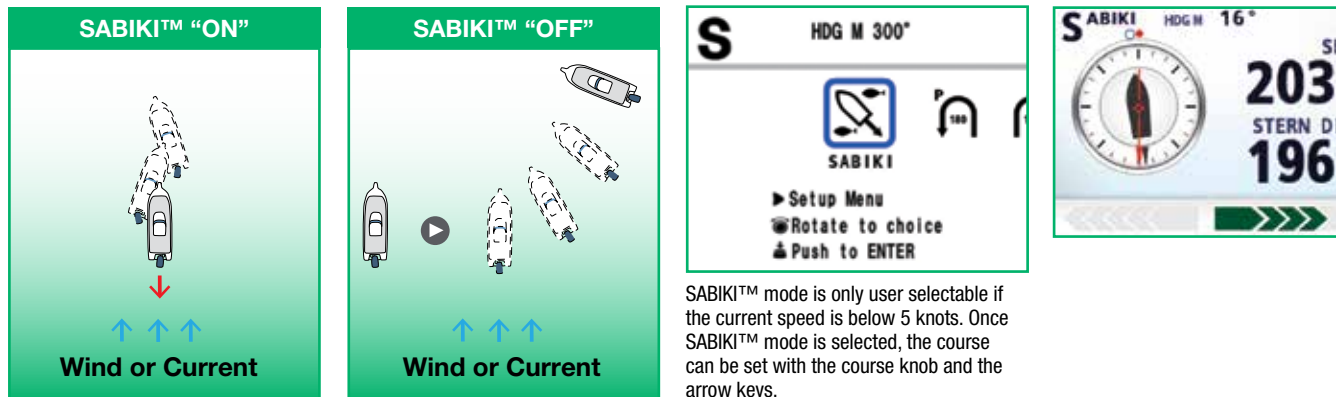

SABIKI™ mode is only user selectable if the current speed is below 5 knots. Once SABIKI™ mode is selected, the course can be set with the course knob and the arrow keys.

SABIKI™ mode lets the Autopilot take control while you are drifting astern, so you can focus on fishing instead of steering. Moving astern at a slow pace, SABIKI™ mode is uniquely tailored for SABIKI fishing, jigging, and bottom fishing. SABIKI fishing requires a bit of technique and whether you just started or have considerable experience, SABIKI™ mode will help you catch the bait fish needed for the big catch.



Autopilots



NAVpilot 300 + **SUZUKI**

*A partnership between Furuno
and Suzuki brings a new level of
Autopilot control*



Point Lock™ is an invaluable tool for anglers to maintain a fixed position while fishing a wreck or reef, and for boaters who occasionally must wait for a bridge to open so they can pass.

FishHunter™ Drive Autopilot Controls

FishHunter™ Drive delivers all-new control features for boaters utilizing select Suzuki outboard models driven by the Furuno NAVpilot 300 Autopilot. These new features offer enhanced Autopilot controls for precision navigation of routes and advanced fishing features for anglers while jigging or trolling. These new FishHunter™ Drive features are in addition to Furuno's conventional FishHunter™ modes, which offer unique navigation features for fishing, regardless of engine type.

KEY FEATURES:


- **Speed Control** - The boat will maintain a constant speed, adjusting engine RPM as needed to account for changes in wind and tide.
- **Route Smoothing™** - Decreases the speed of turns at waypoints while navigating an active route. Reducing speed when executing a turn helps keep the vessel on course.
- **Point Lock™*** - Allows the vessel to easily maintain a fixed position by controlling the rudder and throttle, countering the effects of wind and tide, which are constantly working to move the boat.
- **Auto Stop On Arrival** - The NAVpilot 300 automatically stops the vessel at the destination waypoint. When combined with the Point Lock™ feature, Auto Stop On Arrival allows the vessel to maintain a fixed position at the destination waypoint
- **SABIKI Lock™** - Expands upon the NAVpilot 300's SABIKI™ functionality by controlling both the rudder and throttle to maintain position, freeing the angler to focus 100% on jigging and other vertical fishing.

*Rudder Reference Unit required


Compatible 2023 Suzuki Outboards: DF140BG/115BG, DF150AP/DF200AP/175AP, DF300AP/250AP, DF350A/325A/30

FishHunter™ Drive Interconnections


1. Reversing Pump Control for rudder (with Rudder Reference Unit)

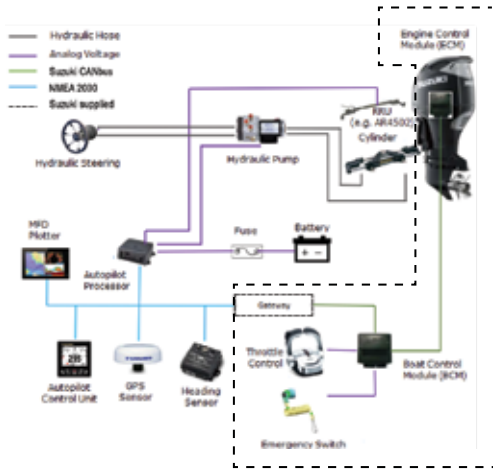

2. Reversing Pump Control for rudder (without Rudder Reference Unit)

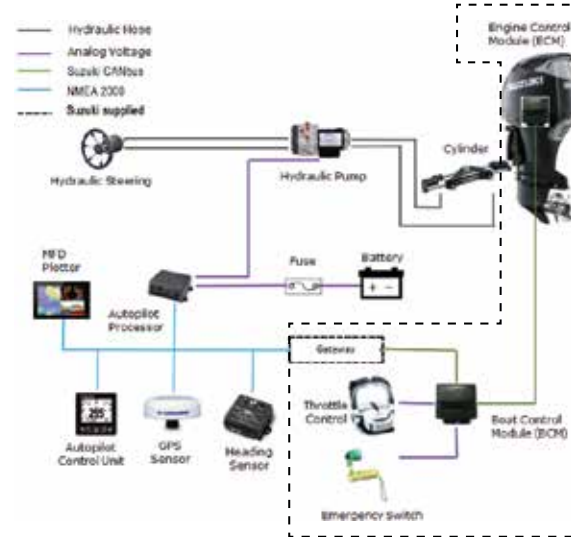

3. Dometic EVCS

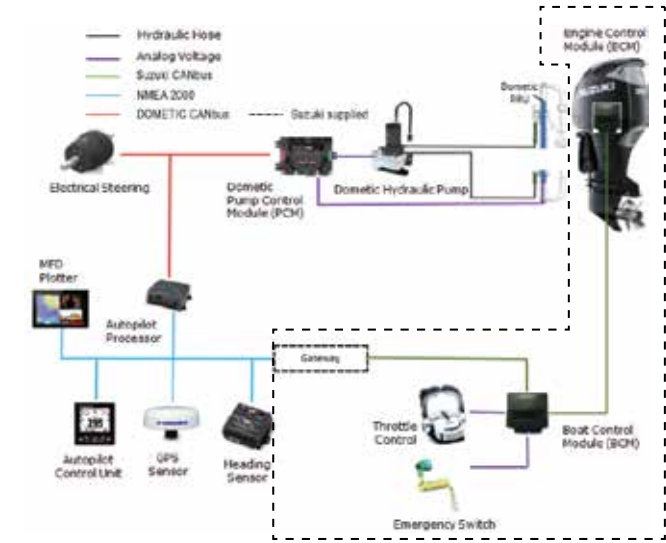

FishHunter™ Drive Requirements

Item	Requirement	
Engine	Suzuki Outboards	DF140BG/115BG, DF200AP/175AP/150AP, DF300AP/250AP, DF350A/325A/300B (2023 Models)
	Supported Qty.	Max. 4
Autopilot	NAVpilot 300	
Display Device	NavNet TZtouchXL series – TZT10X/TZT13X/TZT16X/TZT22X/TZT24X	
	NavNet TZtouch3 series – TZT9F/12F/16F/19F v3.01 or higher	
Navigation Data	NavNet TZtouch2 series – TZTL12F/L15F v8.01 and TZT2BB v8.01 or higher	
	GP-1871F/1971F v5.0	
	For active route output to SUZUKI engines, Autopilot mode display, etc.	
	Heading, position, and vessel speed sensors for Autopilot control (MFD internal GPS does not meet all requirements, SCX-20 recommended)	





Model F170

►►► Spec P125

4.1" Color LCD Instrument/Data Organizer

KEY FEATURES:

- Perfect cosmetic match with NavNet TZtouchXL/TZtouch3 and NAVpilot 300/NAVpilot 711C
- Clear 4.1" screen that is viewable under direct sunlight
- Simple and intuitive interface allows full customization
- Bonded color LCD ensures condensation-free operation, as well as great visibility
- Use legacy wind sensors (F15001/F15001L) with the analog IF-NMEAFI Converter
- Low power consumption (15 VDC A max, LEN3)
- Simple AIS display through connected NMEA2000 devices
- Networked F170 share language and common brilliance settings
- Easy installation with simple hole-saw cutout mounting



For Powerboats and Sailboats Alike!

The F170 Instrument/Data Organizer sports a vibrant 4.1" bonded color display that is visible even in the harshest sunlight conditions. Utilizing NMEA2000, external sensors can be easily connected for simple and reliable operation. The F170 features an easy-to-operate user interface. You can customize almost every display property, allowing you to choose the information you want to be displayed, in the way you want to see it!


Whether you own a powerboat or sailboat, the F170 will be equally useful with the proper sensors connected. For maximum performance and simple setup, the F170 automatically asks you which type of vessel you have, helping to customize operation of the unit.

Various Display Options Are Available

Day and Night modes are also available for less eye strain. With Day and Night mode, losing your night vision is no longer an issue. Simply change between the two modes with a menu setting.




Heading



Wind (CH AWA/AH TWA)



Engine RPM (Single)



Data Box (Split)



Data box (Single)



Rudder



AIS



Graph



Timer



Roll & Pitch



Highway



Engine RPM (Triple)

Sensors and Accessory Options

Model FI5001/5001L

Wind Transducer (L: Long Shaft)

Angle Accuracy: $\pm 10^\circ$
 Speed Accuracy: $> \pm 5\%$ (20 kt)
 PSU: 12 VDC, < 40 mA
 Transducer cable (option): 30/50 m
 Short Shaft Length: 51.81 cm
 Long Shaft Length: 86.61 cm



Model FI5002

Junction Box

CAN bus backbone x 2 ports
 CAN bus x 6 ports
 PSU: 12 VDC, < 2 A



Model DST810

Depth/Speed/Temp Sensor

Frequency: 235 kHz
 Cable: 6 m



Model IFNMEAFI


Analog NMEA Data Converter

CAN bus x 1 port
 PSU: 15 VDC, < 200 mA



Wind transducer comes with a snap-lock fitting that holds the shaft securely, preventing the sensor from being damaged from excessive vibrations aboard the craft.

Installation Example

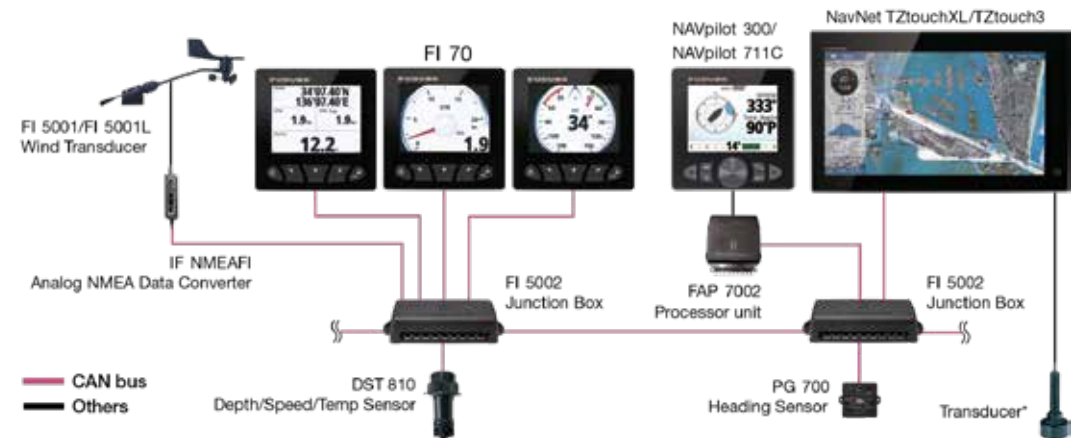



Model MU152HD - 15"

XGA (1024 x 768) Monitor



Model MU192HD - 19"

SXGA (1280 x 1024) Monitor



Model MU270W - 27"

WUXGA (1920 x 1200) Monitor



▶▶▶ Spec P127

Picture in Picture (PIP)

(MU152HD/MU192HD/MU270W)

Composite video (NTSC/PAL) input is available for displaying video images from an onboard TV/DVD player. For MU150HD/152HD/190HD/192HD with more than two composite video inputs, the images in the PIP window automatically switch alternately.



Slim, Lightweight and Compact

(MU152HD/MU192HD/MU270W)

The MU Display Series is slim in depth, light weight, and is so compact that it fits right into virtually any console. Its space-saving design makes optimum use of your dashboard.



Waterproof

(MU152HD/MU192HD)

The MU150HD/152HD/190HD/192HD has a waterproof display and is built to stand up to tough marine conditions when mounted at a flybridge console. The display can be rinsed in water for easy, worry-free cleaning.

Low Power Consumption

(MU152HD)

Utilizing the latest LED backlight, the MU Display Series delivers sharp, high quality images with bright colors and all at very low power consumption.


Black Box navigation electronics make high-resolution Marine Displays more of a necessity than ever!

For crystal clear presentation for your Radar, Chart Plotter, NavNet, or other electronics, turn to the unmatched quality and reliability that you depend on from Furuno.



Model MU175T - 17"

SXGA (1280 x 1024) Touch Monitor

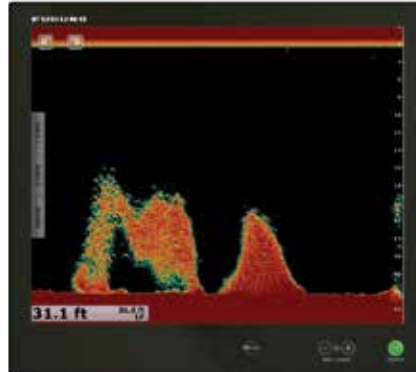

Model MU195T - 19"

SXGA (1280 x 1024) Touch Monitor



Model MU245T- 24"

HD (1920 x 1080) Touch Monitor



KEY FEATURES:	MU152HD	MU192HD	MU270W	MU175T	MU195T	MU245T
Crystal clear marine grade monitors for use as main or remote display	✓	✓	✓	✓	✓	✓
Bonded LCD provides clear view in any weather conditions, eliminating concerns such as dew condensation	✓	✓	--	✓	✓	✓
Available in table top or flush mount (Mounting bracket is optional)	✓	✓	✓	✓	✓	✓
Automatic dimmer sensor adjusts the display brightness as lighting conditions change	--	--	--	✓	✓	✓
Customizable input names for easy on-the-fly identification and switching between onboard Radar, Sonar, Sounder, Camera, etc.	✓	✓	✓	✓	✓	✓
Any of the composite inputs are PIP (Picture-In-Picture) capable, with adjustable size and screen location	✓	✓	✓	✓	✓	✓
Power ON/OFF automatically by DVI signal	✓	✓	✓	✓	✓	✓
1,000 cd/m ² brightness provides superior visibility, even in direct sunlight	✓	✓	--	✓	✓	✓
Built-in scaler allows various resolutions	VGA to SXGA	VGA to SXGA	SVGA to WUXGA	VGA to SXGA	VGA to SXGA	SVGA to HD
Selectable inputs include RGB analog, DVI (Digital Video Interface) and Composite	✓	✓	✓	✓	✓	✓
Multi-Touch Control - compatible with NavNet TZtouch/TZtouch2/TZtouch3	--	--	--	✓	✓	✓

Remote Displays



Model RD-33

►►► Spec P131

4.3" Remote Display

KEY FEATURES:

- 4.3" Sunlight Viewable color LCD
- Maximum visibility under various ambient conditions, at night, and under direct sunlight (brightness of LCD is 700 cd/m²)
- Enhanced data legibility thanks to large characters and high-resolution display
- Full-screen single box presentation down to six-way split screen presentation available
- Supports both CAN bus and NMEA 0183 interfaces
- Two independent CAN bus input and output ports incorporated for daisy chain networking
- Internal NMEA 0183/CAN bus conversion capability available
- Straightforward operation compatible with NavNet Series




See All Your Data - The Way YOU Want It

The RD-33 is a navigational data organizer that allows the operator to select the perfect way to display data from interfaced equipment, such as GPS, Chart Plotter, Radar, Fish Finder, Autopilot, Instruments, and other sensors, including engine information. The high-contrast, color 4.3" LCD may be installed in a compact space, remote from its data sources. The screen is impressively bright, remarkably crisp, and easy to read. Various display modes are available including Speedometer, Highway, and Text. The Text mode presents up to six of the most necessary types of data. The display layout can be customized for your specific needs. This versatile product can also be added to a NavNet system, displaying a variety of navigation data from the CAN bus network.

New and Improved Look and Feel


The RD-33 features a visually appealing fresh new look, combining easy access with user functionality. Thanks to the bright, high-resolution LCD, the RD-33 provides an easy-to-read display to monitor information from remote equipment, through an intuitive graphical user interface.

Display Options In Two Different Styles

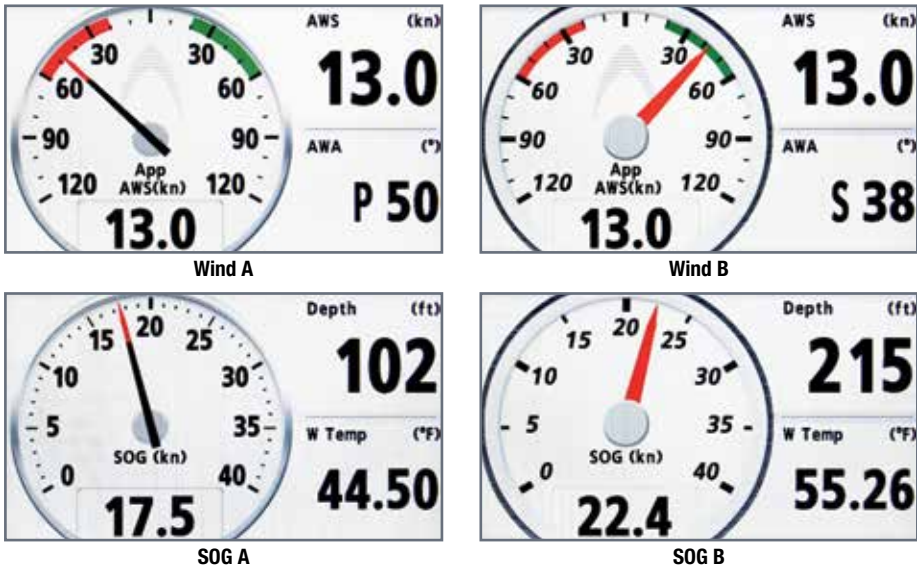

Customizable Split-Screen Presentation

You can customize the view to display information in the format that works best for you. The RD-33 allows you to split the screen in up to six separate segments and provides graphical or numerical representations of environmental changes to facilitate navigation.

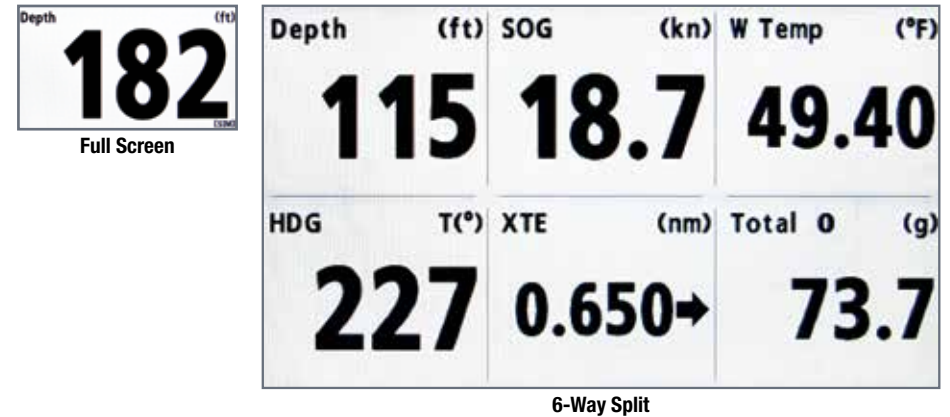

Model RD-50


8.4" Remote Display

KEY FEATURES:

- 8.4" Sunlight Viewable color LCD, viewable under direct sunlight at wing console
- Digital/graph/analog displays available
- Display orientation of up to 4-way split screen
- Adjustable background color for both day and nighttime use
- Up to ten RD50 displays can be connected in series, with common brilliance/dimming adjustment from one or more remote controllers
- NMEA0183 compatible

Versatile and Bright Data Display

The RD-50 is an 8.4" Color LCD remote display unit that displays a wide variety of data from onboard sensors. The RD-50 has 3 display modes: digital, analog, and graph. Up to 10 displays can be connected with a daisy chain cable. The display brilliance of all units connected in this way can be centrally controlled from 1 dimmer controller.

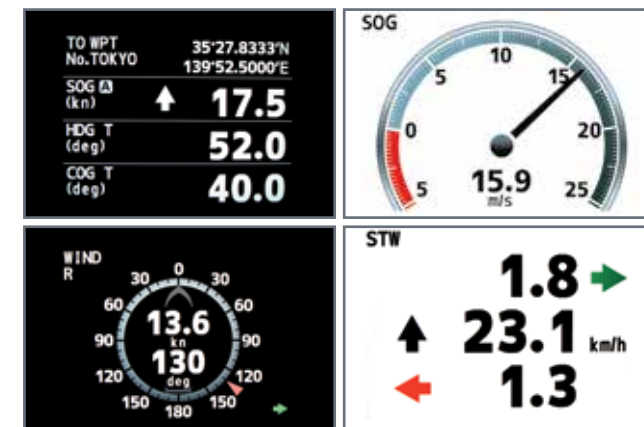

Satellite Compasses



*The perfect heading solution
for any vessel installation, even
where the view of satellites may
sometimes be obstructed!*



Winner of the 2020-2023 NMEA
Product of Excellence Award
Best NMEA2000 Product

Model SCX-20

▶▶▶ Spec P132

NMEA 2000 Satellite Compass™

Model SCX-21

▶▶▶ Spec P132

NMEA 0183 Satellite Compass™


KEY FEATURES:

- Perfect for NavNet TZtouchXL/TZtouch3, NAVpilot-300/711C, Fish Finder, Sonar, DFF-3D, and WASSP installations
- Outputs accurate Time, Position, Heading, COG/SOG, ROT, Roll/Pitch/Heave, 3-Axis Speed, Air Temperature, and Air Pressure data
- Unprecedented heading accuracy for Radars, Sonars, and Navigation
- Utilizes four Multi GNSS (GPS, QZSS, GLONASS, Galileo) antennas
- 1.0 degree heading accuracy, 0.02 knot speed accuracy
- Lightweight antenna - only 1 kg!

MODEL	SCX-20/SCX-21
Heading Accuracy	1.0° rms (static), 0.5° rms (dynamic)
GPS Fix	5 m approx. (2 drms, HDOP < 4)
MSAS Fix	4 m approx. (2 drms, HDOP < 4)
WAAS Fix	3 m approx. (2 drms, HDOP < 4)
Follow-up Rate	45°/sec
Setting Time	60 secs approx.



Revolutionary Baseline Architecture!

Utilizing four separate GNSS Antennas for the ultimate in responsiveness, the SCX-20 and SCX-21 set a new standard for reliable and accurate heading for all of your marine electronics. Traditionally, a Satellite Compass™ uses one baseline between two antennas to calculate heading. The SCX-20/21's four antennas can calculate heading information using any one of the six baselines drawn between the four antennas. The unprecedented quad-antenna design of the SCX-20 and SCX-21 makes them capable of calculating extremely accurate heading, pitch, roll, and heave information. They are the perfect heading solution for complex vessel installations where the view of satellites may sometimes be obstructed.

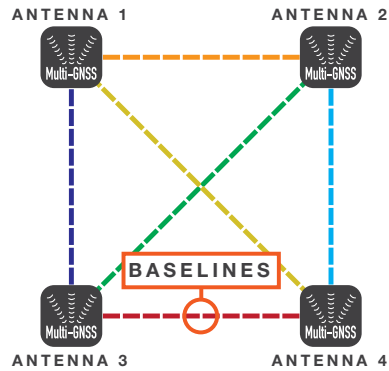

True Motion Echo Trails for Radar/Chart Plotters


True echo trails are available when the SCX-20 or SCX-21 is connected to a capable Furuno Radar, helping to determine own ship's movement as well as the movement of other vessels. Accurate speed and heading data ensures that target trails are displayed smoothly and accurately, without the jagged, zig-zag appearance common to a Satellite Compass™ with a higher degree of deviation.

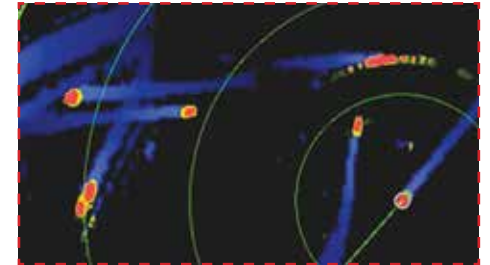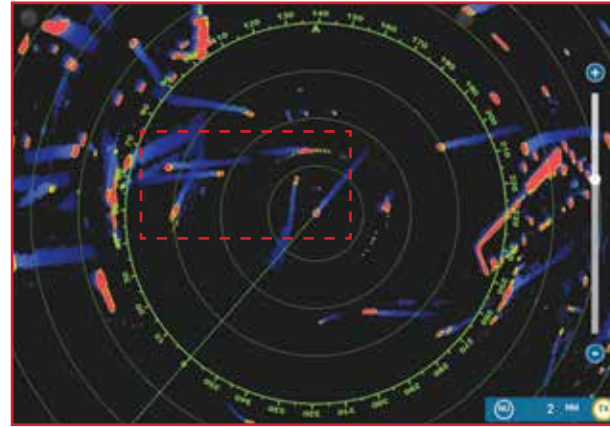


Radar Echo Trail Zig-Zag Domination

When connected to the SCX-20/21, the Radar's echo trails hold steady and clearly depict an accurate echo trail thanks to the SCX-20/21's amazing accuracy. Company A's Satellite Compass™ fails to uphold a steady heading, making echo trails virtually unintelligible. Company B's heading accuracy fluctuates by +/- 3° with a slower update, causing an echo trail that has a wide zig-zag pattern. Company C's heading accuracy fluctuates by +/- 5° with a faster update, causing an echo trail that is indistinguishable and confusing.


FURUNO SCX-20/21

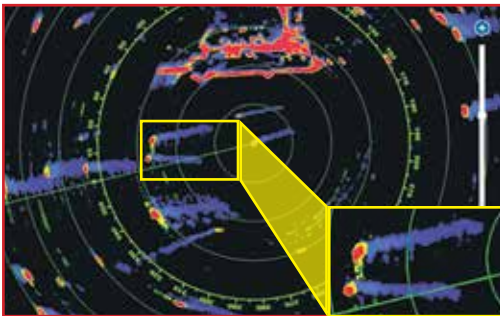


Company B

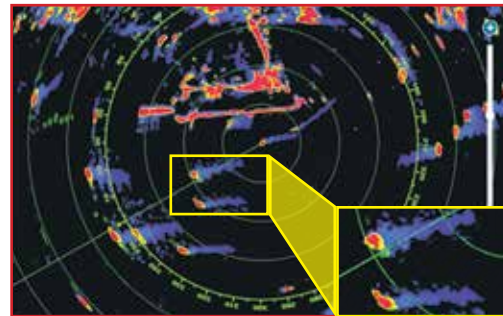

Company C

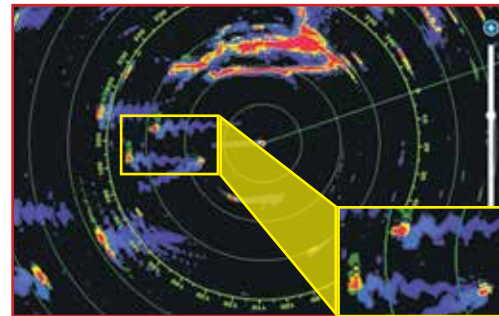

Company A

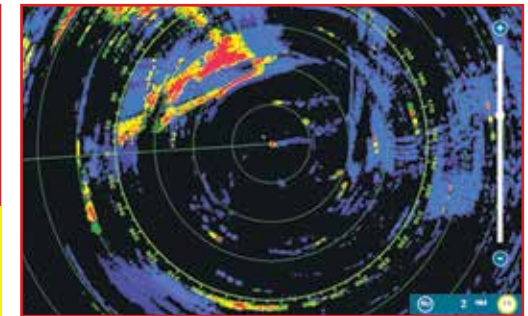

MORE ACCURATE

SCX-20/21 < COMPANY B < COMPANY C < COMPANY A

LESS ACCURATE



Model SC-33

▶▶ Spec P133

NMEA 2000 Dome Satellite Compass™

KEY FEATURES:

- Heading accuracy of 0.4°
- Perfect for Radar Target Tracking and True Echo Trails
- NMEA2000 Certified
- NavNet TZtouchXL/TZtouch3 Series compatibility
- Multi-GNSS with GPS, Galileo, GLONASS, QZSS satellite networks
- Strong against multi-path offering high-reliability
- Works perfectly with TimeZero software
- Free from regular maintenance due to solid-state design


MODEL	SC-33
Heading Accuracy	0.4°
GPS Fix	10 m (95%)
GNSS Fix	3 m (95%)
Follow-up Rate	45°/sec
Settling Time	1 min
Antenna Unit	Dome

Sleek, Fast, and Accurate!


The SC-33 Satellite Compass™ provides highly accurate heading information for navigation equipment such as Radar, Plotter, Autopilot, Fish Finder, and Sonar. With its compact GNSS antenna and built-in processor, it can be used for a wide variety of applications on any type of vessel. This all-in-one system delivers incredibly accurate heading, roll/pitch/heave, GPS position, SOG (Speed Over Ground), COG (Course Over Ground), and ROT (Rate of Turn) data.

Revolutionary 2-Antenna and Rate Sensor System

In order to calculate roll & pitch data, a Satellite Compass™ requires two vectors. The SC-33 employs a dual GNSS antenna system that calculates a single vector while a 3-axis rate gyro and acceleration sensors add the second vector. This configuration enables the SC-33 to calculate highly-accurate roll and pitch data without using a third sensor.

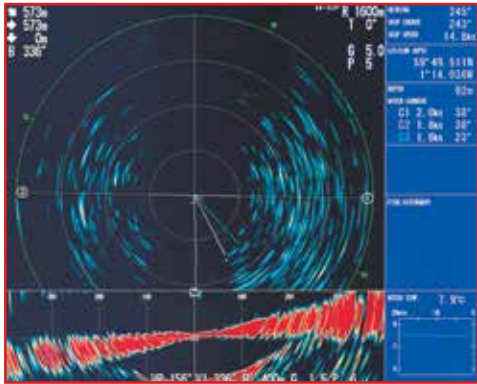


BEFORE Stabilization

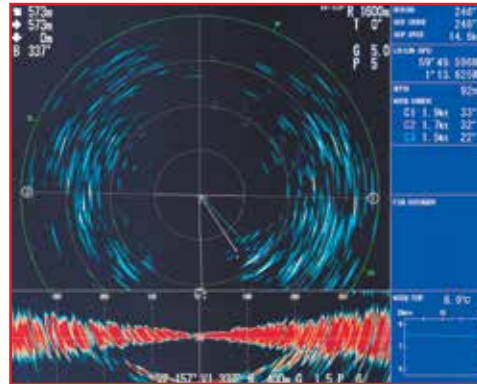

AFTER Stabilization

Heaving Compensation for Fish Finders

Even in heavy seas, accurate heave compensation from the SC-33 enables Fish Finders, such as the FCV-1150 or NavNet TZtouchXL/TZtouch3, to show you an unwavering presentation of the seabed, without the undulations caused by sea conditions.

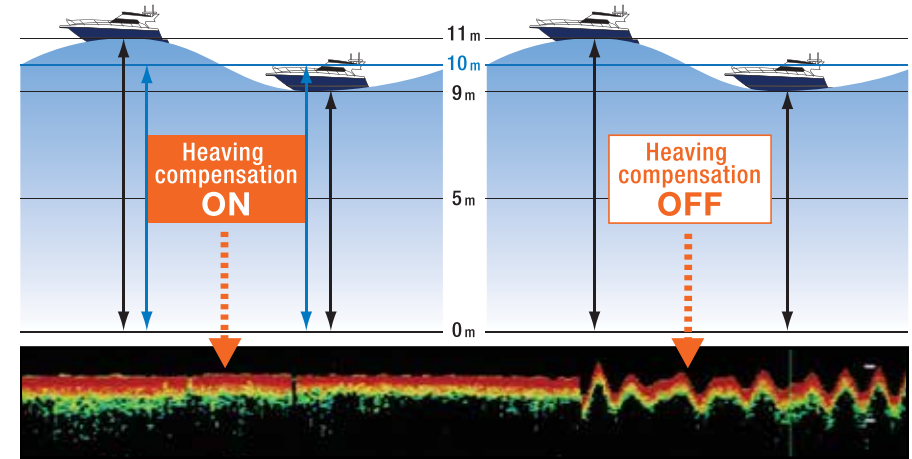

Satellite Compasses



SC-703 for SC-70



SC-1303 for SC-130



Model SC-70

▶▶▶ Spec P133

Satellite Compass™

KEY FEATURES:

- Precision antenna that provides highly-accurate heading for all your vessel's navigation electronics: Autopilot, Radar, ARPA, Scanning Sonar, Current Indicator, Chart Plotter, ECDIS, Autopilot, and more
- Utilizes GNSS such as GPS, Galileo, and GLONASS for high precision
 - SBAS (Satellite Based Augmentation System) compatible (EGNOS, WAAS, MSAS)
- Provides precise data for SOG, COG, ROT, and L/L
- Speed on 3-axis (bow, stern, and longitudinal) for safe navigation and berthing
- IMO type-approved as THD, GPS, and ROTI compliant with IEC and ISO standards
- Rapid follow-up rate of 40°/s (twice the IMO high speed craft requirement of 20°/s)
- Maintenance free and no recurring costs, as there are no mechanical parts
- Super short attitude fixing time - 90 sec (dependent on equipment location)
- Easy to retrofit when using existing antenna cabling¹ (For SC-50/55/60/110/120)
- Precision Pitch/Roll data in Analog² and Digital formats for Vessel Stabilization, Sonar, etc.
- Full screen ROT Swing Meter for easy readout

¹: Requires the LAN_CNV kit, available as an optional extra

²: Requires the IF-NMEASC, available as an optional extra

Model SC-130

▶▶▶ Spec P133

Satellite Compass™


MODEL	SC-70	SC-130
Heading Accuracy	0.4° rms	0.25° rms
GPS Fix	10 m approx.	
DGPS Fix	4 m approx.	
WAAS Fix	4 m approx.	
Follow-up Rate	0.1°/s, 0.01°/s, or 0.001°/s Rate-of-Turn (From Menu)	
Setting Time	90 Sec	90 Sec
Antenna Unit	Dome	Open Array

Bow & Stern Monitoring for Safe Berthing

The Satellite Compass™ provides a variety of data, including GPS Position, SOG (Speed Over Ground), COG (Course Over Ground), ROT (Rate Of Turn), and 3-axis speed (bow, stern, and longitudinal). All of this data assists with critical maneuvers, such as berthing. The Satellite Compass™ is maintenance-free - a great asset for any vessel - and connects easily into the existing shipboard network via Ethernet connection.



GPS Integrity Mode



Navigational Data



Speed Mode



Model PG-700

▶▶▶ Spec P131

Magnetic Fluxgate Heading Sensor

KEY FEATURES:

- Provides highly accurate heading data
- Black Box type fluxgate magnetic sensor
- CAN bus interface incorporated
- Can be mounted on either the bulkhead or the floor, using standard L-bracket



Easy Mounting with L-Bracket

PG-700 can be mounted on either a bulkhead or the deck using the standard L-bracket. Thanks to the versatility in design, facing the PG-700 towards the bow is a breeze.



Model PG-500

▶▶▶ Spec P131

Integrated Heading Sensor

KEY FEATURES:

- Inexpensive heading sensor with the highest accuracy and stability in this class of equipment
- Automatic correction for local magnetic variation with an appropriate GPS Navigator or manual correction with an optional Remote Display RD-33
- High stability for a solid-state rate gyroscope
- Compact waterproof housing with visible status indicators for simple installation
- Three heading data output ports: two IEC/NMEA 0183 ports, one AD-10 port

Maintenance-Free Heading Solution

Furuno's PG-500 is a rate compensated heading sensor that incorporates innovative electromagnetic compass technology for highly accurate and stable readouts of your ship's heading. The sensor detects terrestrial magnetism and produces compass data that can be utilized in NMEA 0183 and Furuno AD-10 formats. Typical applications include true Radar echo trail and true motion, Autopilots, Chart Plotters, scanning Sonars and more. These sophisticated components are contained within a rugged, compact case. Unique design elements make the PG-500 virtually maintenance-free and easy to install.



Model FA-40

▶▶▶ Spec P134

AIS Receiver

KEY FEATURES:

- Enhances safe navigation by receiving critical navigation information from local AIS-equipped vessels
- NMEA 2000 output to NavNet TZtouch MFDs and compatible devices
- Serial output for integration with various Radars, Chart Plotters, Radios, and PCs for added redundancy and installation flexibility
- Compatible with NavNet TZtouchXL/TZtouch3



All-Condition Collision Avoidance

The FA-40 Automatic Identification System (AIS) Receiver provides real-time information about AIS-equipped vessels to your NavNet, AIS-ready Chart Plotter, navigation software, or Radar. The information is graphically presented allowing you to monitor and avoid AIS-equipped vessels in your area. The information the FA-40 receives includes the vessel name and call sign, position, course, speed over ground, and other useful information. Since AIS targets can be received even if they are not within line of sight, the FA-40 enhances situational awareness in congested waterways, limited visibility, or heavy sea conditions, and gives the navigator much more information about AIS equipped vessels.

The FA-40 has one NMEA 2000 and one NMEA 0183 port. This provides simple and easy connection to NavNet systems, AIS-capable Radar, Chart Plotters, and TimeZero. The FA-40 will work with virtually any marine VHF antenna. An optional VHF signal splitter is offered to allow the FA-40 to work with an existing VHF radio antenna installation.



Model FA-70

▶▶▶ Spec P134

Class B+ AIS Transceiver

KEY FEATURES:

- Fully satisfies the technical standards for Class-B AIS, IEC 62287-1
- Receives both Class-A and Class-B AIS information
- Outputs data to NavNet TZtouchXL/TZtouch3
- Flexible integration with various AIS-compatible Radar and Chart Plotters
- Switchable, high-speed SO-TDMA and CS-TDMA
- Internal Antenna Splitter



Accurate Information Exchange

The FA-70 is a Class-B+ AIS that transmits your vessel information at higher power & faster rates than typical Class B units for added awareness. SO-TDMA and CS-TDMA guarantees an AIS time slot allocation, making you visible in congested waters. It complies with IMO MSC.140(76) Annex 3, A.694, ITU-R M.1371-2 and DSC ITU-R M.825-3. It also complies with IEC 60945 (EMC and environmental conditions). The FA-70 consists of a transponder unit with GPS antenna. A VHF antenna is required and should be supplied separately. The transponder contains a VHF transmitter, two TDMA receivers on two parallel VHF channels, interface, communication processor, and internal GPS receiver. The internal GPS is a 12-channel all-in-view receiver with differential capability. It also gives position, COG, and SOG.



Model FA-170

▶▶▶ Spec P134

Class A AIS Transponder

KEY FEATURES:


- Complies with IMO MSC.74(69) Annex 3, IMO MSC.302(87), A694, ITU-R M. 1371-5 and DSC ITU-R M.825; It also complies with IEC 61993-2 (Type testing standard) and IEC 60945 Ed. 4 (EMC and environmental conditions)
- Displays information about AIS-equipped ships, as well as coastal stations and Aids to Navigations within VHF coverage
- Outputs AIS data to NavNet TZtouchXL/TZtouch3, Radar, and other navigational equipment for collision avoidance support



2018-2019, 2021

Collision Avoidance Made Easy!

Displays symbols for AIS-equipped ships, base stations, AIS-SART's and more. When you select a specific target, the information about the ship such, as MMSI (or name, when available), heading, SOG, COG, and more, are displayed.

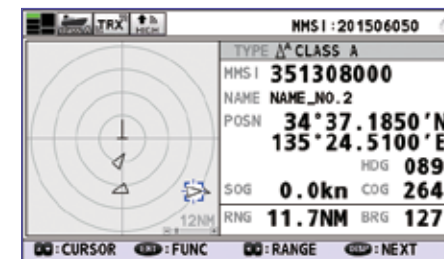

- | | |
|--------------------------------|-------------------------------|
| ✓ Own ship symbol | ⊕ Aid to Navigation (virtual) |
| △ Target | ⊗ AIS-SART/AIS MOB/EPIRB-AIS |
| [△] Selected target | ✈ SAR aircraft |
| ⬢ Aid to Navigation (physical) | ⚓ SAR vessel |
| ◇ Aid to Navigation (physical) | |



*FM-4800 only

Model FM-4800

▶▶▶ Spec P135

Marine VHF Radiotelephone with built-in AIS Receiver

KEY FEATURES:

- Built-in AIS Receiver for situational awareness and collision avoidance
- Built-in 72 channel GPS Receiver (FM-4800)
- 25 W/1 W output power
- Class D DSC with Distress, Individual, and All Ship calls
- 30 W PA/Loud Hailer with automatic fog signals and Listen-Back capability
- NMEA 2000 and NMEA 0183 networking
- ATIS mode available for inland waterways
- Pre-programmed frequency band for USA, Canada, and International marine channels, plus 10 weather channels where available
- Initiate DSC calls directly from NavNet TZtouch2/TZtouch3 Series MFDs when connected via NMEA 2000
- Dual Station with optional handset
- Up to 3 Handsets/Speakers connectible (FM-4850)
- Water protected (Transceiver, Microphone, and Handset all IP67)

Model FM-4850

▶▶▶ Spec P135

Black Box Marine VHF Radiotelephone with built-in AIS Receiver

Built-In GPS (FM-4800)

Built-in High-Sensitivity 72 channel GPS with internal antenna which eliminates the need for an external GPS antenna and its wiring requirements.

Built-In AIS Receiver

When connected to an MFD or chart plotter that can read and display AIS data, the built-in AIS Receiver will enhance your safety at sea by providing vital information for situational awareness and collision avoidance.

Loud Hailer/Fog Horn

15 W/30 W max. PA/Loud Hailer with 8 automatic fog/warning signals and a listen-back capability allowing for two-way communication.



Optional Speaker SP-4800



Optional Handset HS-4800

Dual Station

The optional Handset HS-4800 supports all the functionality of the FM-4800 and works as a second station. Intercom function is also supported.



Model FM-8900S

▶▶▶ Spec P136

VHF Radiotelephone (simplex/semi-duplex)

KEY FEATURES:

- Semi-duplex 25 W VHF Radiotelephone with built-in Class A DSC and CH70 watchkeeping receiver
- Fully meets GMDSS Class A carriage requirements for SOLAS ships
- Meets the ITU recommendation on digital selective calling system for use in the Maritime Mobile Service, ITU-R M.493-14 or later
- Easy to read, high-contrast 4.3" bright color LCD
- Improved noise reduction and speaker for superb voice quality
- Quick access to CH16: Press the CH16 key on the keypad to switch to Radiotelephone display and select CH16 instantly
- Easy channel selection with rotary control or direct keypad input
- Automatic entry of own ship position and time through an interfaced GPS receiver
- ATIS signal transmission available for inland waterways
- Replay of the latest received voice call, which is automatically recorded, for 120 seconds
- Offers a wide variety of indoor and waterproof remote station options



Model FS-1575/2575

▶▶▶ Spec P137

MF/HF Radiotelephone

KEY FEATURES:

- FS-1575 150 W MF/HF Radio
- FS-2575 250 W MF/HF Radio
- MF/HF Radiotelephone with DSC facility
- Fully meets GMDSS carriage requirements for SOLAS ships operating in A3 and A4 sea areas
- Meets the new ITU recommendation on digital selective calling system for use in the Maritime Mobile Service, ITU-R M.493-14
- High-contrast 4.3" bright color LCD (480 x 272 pixels)
- Capable of distress, safety, and routine communication
- Instant selection of 256 user-specified channels with a rotary knob or direct keypad input
- Quick access to DSC message composition using dedicated keys on the control unit
- Quick access to dedicated functions in the menu operation using numeric keypad
- Offers a wide variety of indoor and waterproof remote station options





Optional Intercom

Model LH-5000

▶▶▶ Spec P138


Loud Hailer

KEY FEATURES:

- Two powerful 30 W hailer outputs (1 forward/1 aft)
- Listen-Back feature for two-way communication
- Eight automatic fog/warning signals
- Up to 6 intercoms for onboard communication and PA (5 W each)
- Built-in high-quality speaker
- Bright LCD for easy operation
- Flush mount capability
- Water protected main unit, microphone, and intercoms speakers

8 Channel Public Announcement

With 2 hailers and 6 intercoms providing a total of 8 possible channels, you can now coordinate any action even on a big ship or facility.

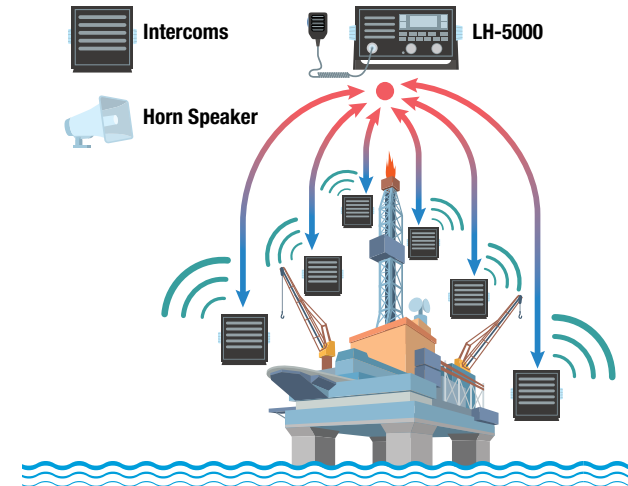



Model NX-300

▶▶▶ Spec P138


NAVTEX Receiver

KEY FEATURES:

- Paper-free Navtex Receiver
- Selectable frequency for both international and domestic/local Navtex messages
- Uninterrupted reception of Navtex messages
- Memory for up to 28,000 characters
- High-contrast 4.5" Silver Bright LCD
- Nav data display when connected to external GPS
- Automatic selection of the Navtex station according to position when connected to external GPS
- Low power consumption
- Memory backup with long-life lithium battery

Maintain Situational Awareness

Monitor navigational warnings, meteorological warnings, search and rescue information, and other data for ships sailing within 200-400 N.M. of shore.



Message List

- A Navigation warning
- B Meteorological warning
- C Ice report
- D Search/Rescue Info/Piracy & Armed Robbery
- E Meteorological forecast
- F Pilot message
- G AIS service message
- H Loran-C message
- I Reserved - presently not used
- J Differential omega message
- K Other electronic navigational aid and system message



Nav Data

- L Navigational warning (additional)
- M-Y Reserved – presently not used
- V Notice to Fishermen (US only)
- Z QRU (no message on hand)



Model FAX-30

▶▶▶ Spec P139

Black Box Weather Facsimile Receiver

KEY FEATURES:

- Cost effective paperless weather fax and Navtex Receiver
- Connect directly to a NavNet display or through an Ethernet hub
- Connect to any Internet-connected PC
- Selectable display colors: 8 gray tones, monochrome, blue shades, pink and black, red and blue
- Web browser navigation on PC, no proprietary software required
- Print images and messages from PC and printer
- Store a maximum of 12 weather fax images (depending on file size)
- Navtex messages can be retrieved in a table listing of up to 130 stored files
- Stored images/messages can be shown at any time
- 320 user programmed channels
- Noise rejection for clear image
- Thumbnail view for easy selection of stored images

Connect via PC or NavNet Display

Furuno's FAX-30 connects directly to a NavNet display or an Ethernet hub with a single Ethernet cable. If it is connected to an Ethernet hub that has multiple NavNet displays attached, each of those displays will have access to the FAX-30. On a PC, the images and information are displayed by simply using a web browser. There is no complicated proprietary software to install or learn. Combine the new FAX-30 with NavNet's true color Radar and you have the ultimate in weather tracking.



PC not supplied





Model FELCOM251

▶▶▶ Spec P140

INMARSAT FleetBroadband

KEY FEATURES:

- IP handsets and Incoming Bell (FB-3001 option) can be integrated through Ethernet; Multiple IP handsets can be incorporated into the network using the switching hub
- IP-PBX incorporated; Comprehensive selection of telephone exchange functions available, i.e., internal communication lines, incoming call routing, group call function, etc.
- Built-in NAT router facilitates smooth network integration to the Internet
- Wide variety of security settings available, i.e., firewall, IP filter, etc.
- No dedicated software required for configuration setup (web server function incorporated); Configuration setup can be done using a web browser
- Supports PPPoE to facilitate automatic dial-up connection/disconnection via applications

Model FELCOM501


▶▶▶ Spec P140

INMARSAT FleetBroadband

Equipment List:

MODEL	FELCOM251	FELCOM501
Standard		
1. Antenna Unit	FB-1251	FB-1501
2. Communication Unit	FB-2001	
3. IP Handset	FB-8001	
Option		
Incoming Bell	FB-3001	
Analog Telephone	GEMINI 9333B4	
G3 FAX	FAX2840JP/2840	
AC/DC Power Supply Unit	406080A-FUR-001	

Fleet Broadband System Configuration

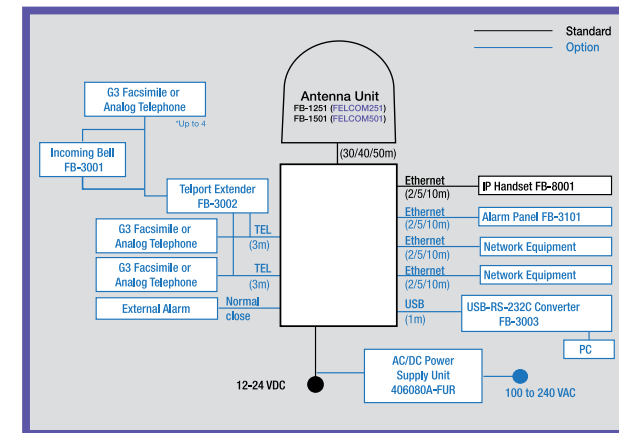

A vessel needs to notify Inmarsat Satellite of which spot beam area the vessel is located in. This way, the Inmarsat Satellite can transmit the spot beam to the vessel's location.

INMARSAT FleetBroadband	
Max. Communication Speed	up to 432 kbps (FELCOM501) up to 284 kbps (FELCOM251)
Voice	available
FAX	available (3.1 k audio)
SMS	available
Service area	Global coverage (with exception of extreme polar regions)
Billing	pay-as-you-go

Ku-Band	
Max. Communication Speed	Up to 4 Mbps*
Voice	Available (VoIP)
Service area	Regional coverage provided by multiple service providers (seamless roaming possible without any roaming surcharge)
Billing	Fixed Flat Fee

* For faster service, consult with your nearest distributors.



Stay connected through SafeComNet™
Seamless broadband communications for ocean-going fleets

LCR (Least Cost Routing)

LCR is the process of selecting the path of communications traffic based on cost, allowing for automatic selection of the most cost-efficient communication line available. It is possible to set VSAT, which is charged by monthly fixed flat rate, as the default communication means, and switch over to "pay-as-you-go" FleetBroadband whenever the VSAT line is out. This way, total cost for communication can be reduced.

Traffic Control

Traffic control is the control of onboard network traffic to optimize performance of communication. This can be achieved by setting order of priority for data to be handled (Quality of Service: QoS), and restricting the volume of communication at a time, and applications to be used, as well as access to certain content.

Firewall

A firewall is designed to permit or deny network transmissions to protect networks against unauthorized access by malware from the public Internet, i.e., computer viruses and keyloggers, while permitting legitimate communications to pass.



IP Routing

IP routing is a set of protocols to facilitate IP connection between onboard network and the public Internet.


VPN

VPN (Virtual Private Network) is a secure way of connecting to onshore office network from a remote location, using the Internet. Since encryption is applied to the communication, the network data packets can be transported privately, preventing unauthorized users from reading the private network packets. This way, the same network environment as onshore offices can be constructed onboard vessels. Compared with using exclusive circuit services to construct secure network between vessels and onshore offices, VPN has the advantage of reducing communication cost.

IP PBX

IP PBX is a PBX for IP telephones utilizing IP network, unlike PABX commonly used for analog telephone network. The system is designed to interoperate with the conventional PABX and onboard public addresser system as well as VoIP of Inmarsat and VSAT.

Onboard LAN Network

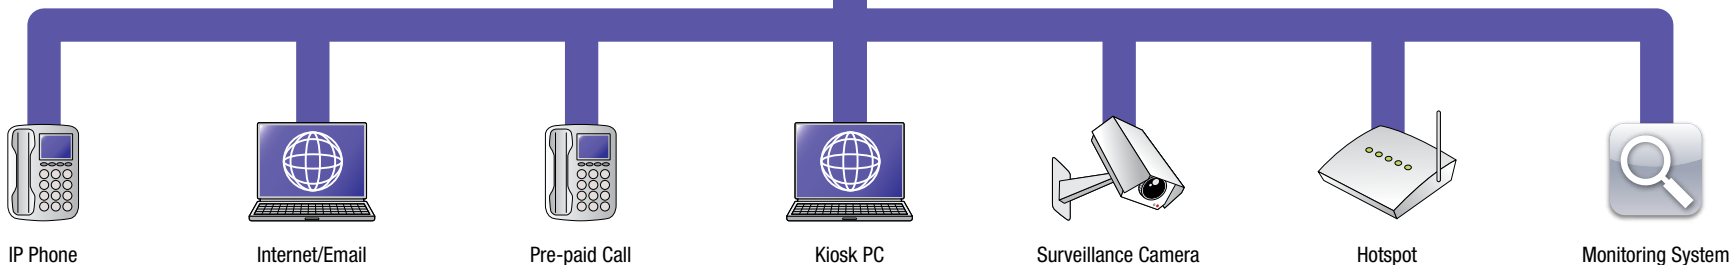



Specifications

Subject to change without notice.

NavNet Series	88	Autopilots	123
Radars	99	Instruments	125
GPS/Chart Plotters	110	Monitors	127
Fish Finders	115	Remote Displays	128
Sonars	119	Satellite Compasses	129
Multibeam Sonars	121	Communications	131

NavNet TZtouchXL MFDs


MODEL	TZT10X	TZT13X	TZT16X	TZT22X	TZT24X
DISPLAY UNIT					
Type	Color TFT multi touch IPS LCD				
Screen Size	10.1" Wide	13.3" Wide	15.6" Wide	21.5" Wide	24" Wide
Screen Resolution	WUXGA 1920 x 1200	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Screen Brightness	900 cd/m2 (typical)				
Display Colors	16,770,000 colors (Chart Plotter), 64 colors (Radar/Fish Finder)				
Language	Bulgarian, Chinese, Danish, English (USA/UK), Finnish, French, German, Greek, Italian, Japanese, Norwegian, Portuguese, Russian, Spanish, Swedish, Turkish, Polish				
GPS/WAAS					
Receiver Type	GPS: 72 channels, SBAS: 1 channel (C/A mode, WAAS)			-	-
Receiving Frequency	L1 (1575.42 MHz)			-	-
Time to First Fix	100 s (cold start)			-	-
Accuracy	10 m (GPS), 7 m (MSAS), 3 m (WAAS)			-	-
Position Update Interval	100 ms or 10 Hz			-	-
CHART PLOTTER					
Cartography	TZ MAPS, MM3 Vector, and CMOR capable (U.S. only)				
Memory Capacity	30,000 user points, 100,000 points for ship's tracks, 200 planned routes (500 points per route)				
Alarms	Anchor Watch, XTE, Depth*, Speed, Sea Surface Temperature*, Trip Distance, Fuel Gauge* (*external data required)				
RADAR					
Display Modes	Head-up, North-up* *Heading input required.				
Echo Trails	Interval: 15 s, 30 s, 1 min, 3 mins, 6 mins, 15 mins, 30 mins and continuous (Heading input required)				
Target Tracking	100 ARPA Targets (Radar dependent) with fully automatic target acquisition (Heading input required)				
Radar Alarms	Guard Zone, CPA/TCPA, Video, Azimuth, Heading Line				
FISH FINDER					
Transmit Frequency*	CW: 50/200 kHz, CHIRP: 40 kHz to 240 kHz			-	-
Transducer	300/600 W or 1 kW* *Matching box MB1100 required for some transducers.			-	-
Display Range	2 to 1,200 m; shift 0 to 1,200 m				
Extension Mode	ACCU-FISH™, A-Scope, Auto (Fishing/Cruising), Bottom Discrimination, TruEcho CHIRP™ (with compatible transducer)				
Picture Advance	8 steps: x4, x2, x1, 1/2, 1/4, 1/8, 1/16, stop				
Fish Finder Alarms	School of fish, School of fish for bottom lock			-	-
SIDE-SCAN					
Transmit Frequency*	CHIRP: 220-240KHz/445-465KHz				
Transducer	225kHz: 225T-PR904, 225T-SS904. 225T-TM904 / 455kHz: 455T-PR903, 455T-SS903. 455T-TM903			Side Scan with networked TZT10X, TZT13X, TZT16X Only	
Display Range	750 feet to each side				
Display Colors	Green, Blue, Amber, White				
Display Screen Sizes	Full Screen, 1/2 Screen, 1/4 Screen, 1/6 Screen Full Screen, 1/2 Screen, 1/4 Screen, 1/6 Screen				
Direct Connect to MFD	Direct connect to TZ10X, TZ13X, TZ16X only; may be networked with TZT22X/TZT24X				
INTERFACE					
NMEA2000	1 Port				
Input	065280, 126992/993/996, 127237/245/250/251/257/488/489/505, 128259/267, 129025/026/029/330/038/039/040/041/291/538/540, 129793/794/798/801/802/808/809/810, 130306/310/311/312/313/314/316/576/577/578, 130817/818/820/822/823/826/827/828/880				
Output	126992/993/996, 127250/251/257/258, 128259/267/275, 129025/026/029/033/283/284/285, 130306/310/311/312/313/314/316				
NMEA0183	1 Serial Output Port				
Output	AAM, APB, BOD, DBT, DPT, GGA, GLL, GNS, GSA, GSV, RMB, RMC, RTE, TTM, VDM, VTG, WPL, XTE, ZDA				
LAN	1 Port (1000 BASE-T)				
USB	1 Port (USB 3.0) for control unit		1 Port (USB 3.0) for touch monitor and control unit: 1 Port USB touch output for HDMI device		
Video I/O	Input: 1 port (NTSC/PAL)		Input: 1 port (NTSC/PAL) and 1 port HDMI 1920 x 1080p or less (progressive only)		Output: 1 port (HDMI 1080p)
AUX I/O	2 Ports (Event Switch and External Power Switch)				
SD Card Slot	1 Slot (Micro SDXC, rear)				
Wireless LAN	IEEE802.11b/g/n, Transmit frequency: 2.412 to 2,462 GHz, 11dBm max				
Transducer Connection	1 Port 12 pin for CHIRP/CW, 1 Port 12 pin for Side Scan			-	-
Bluetooth	Bluetooth Included				
ENVIRONMENT					
Temperature (IEC60945)	-15°C to +55° C				
Relative Humidity	93% or less at +40° C				
Waterproofing	IP56				
POWER					
	12-24 VDC				
	T.B.D.	T.B.D.	T.B.D.	5.1-2.5A	6.7-3.2A

Drawings - NavNet TZtouchXL


Refer to Online manual for more details. For illustration purposes only; not drawn to scale. *Bracket is optional for TZT16X

TZT10X


Multi Function Display (Tabletop Mount) TZT10X 3.9 kg 8.6 lb

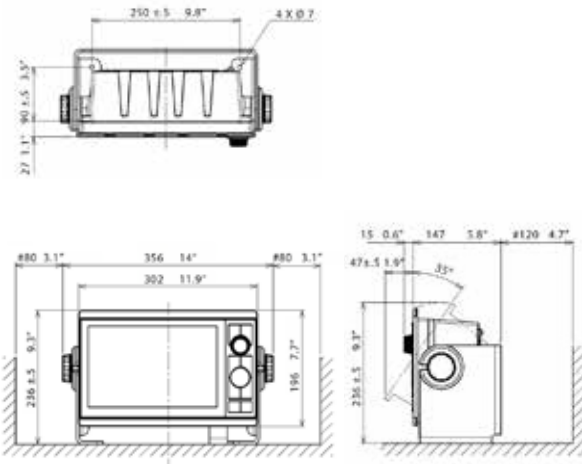

Multi Function Display (Flush Mount) TZT10X 3.0 kg 6.6 lb

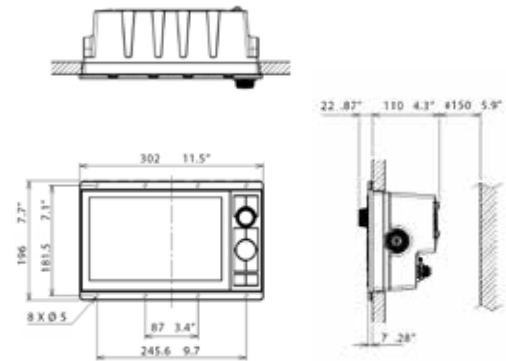


Multi Function Display Flush Mount TZT10X Cutout Dimension




TZT13X

Multi Function Display (Tabletop Mount) TZT13X 5.4 kg 11.9 lb

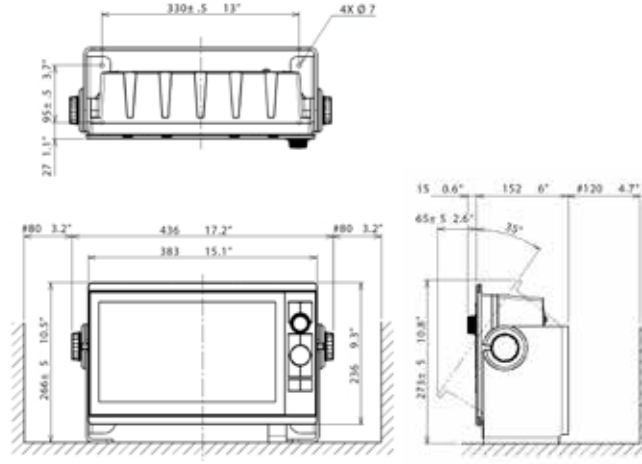

Multi Function Display (Flush Mount) TZT13X 4.3 kg 9.5 lb

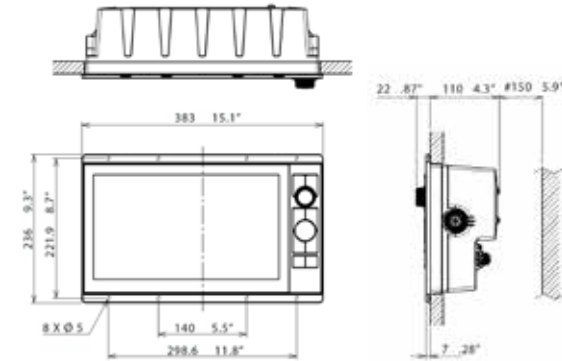


Multi Function Display Flush Mount TZT13X Cutout Dimension




TZT16X

Multi Function Display (Tabletop Mount) TZT16X* 5.9 kg 13.0 lb

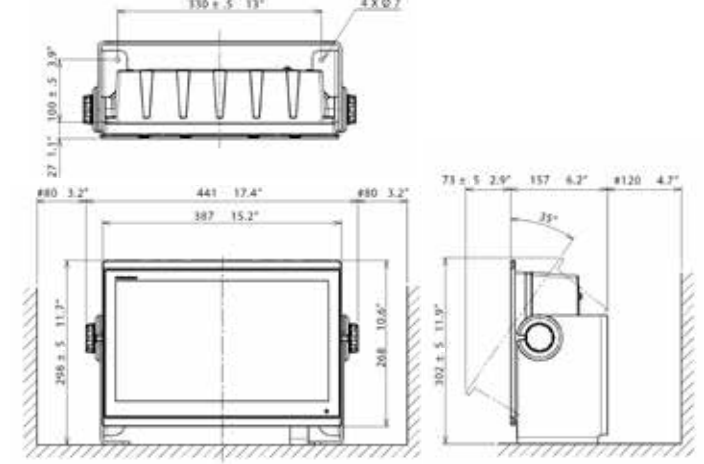

Multi Function Display (Flush Mount) TZT16X* 4.4 kg 9.7 lb

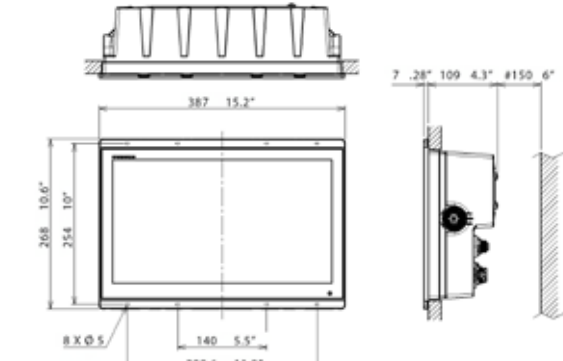

Multi Function Display Flush Mount TZT16X Cutout Dimension




Drawings - NavNet TZtouchXL

Refer to Online manual for more details. For illustration purposes only; not drawn to scale.


TZT22X

Multi Function Display (Tabletop Mount) TZT10X 5.7 kg 12.6 lb

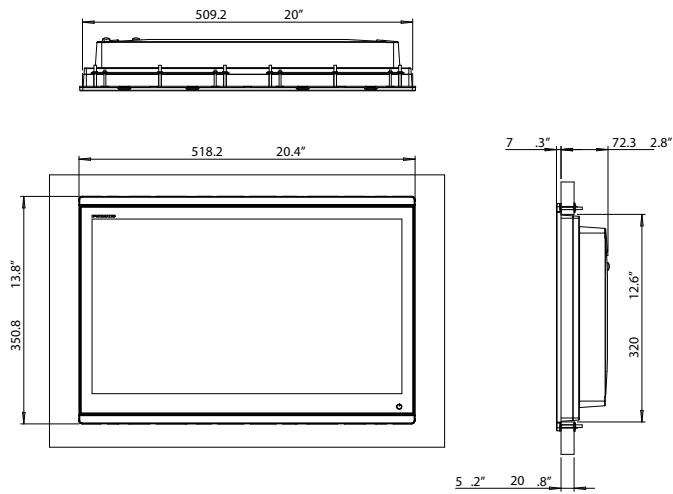



TZT24X

Multi Function Display (Flush Mount) TZT24X 8.1 kg 17.9 lb

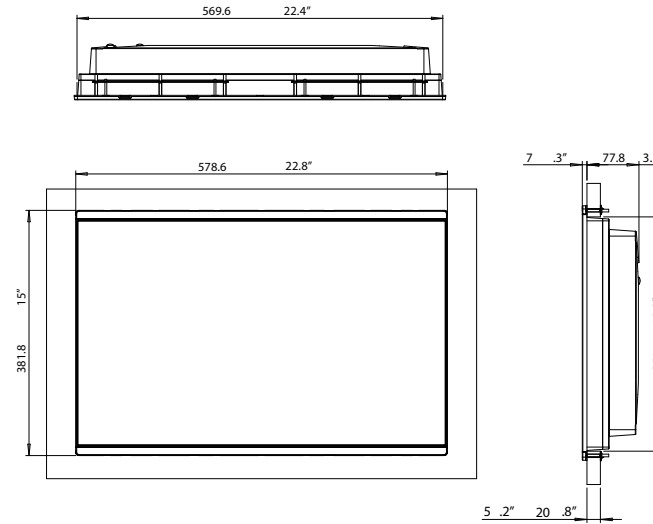

Multi Function Display Flush Mount TZT22X Cutout Dimension

Multi Function Display Flush Mount TZT24X Cutout Dimension

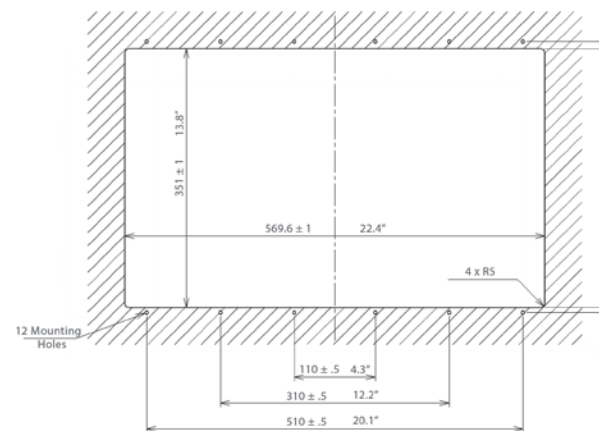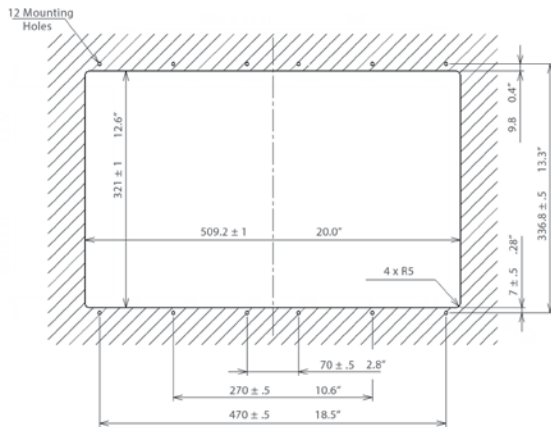

NavNet TZtouch3 MFDs


MODEL	TZT9F	TZT12F	TZT16F	TZT19F	TZT2BB
DISPLAY UNIT					
Type	Color TFT multi touch IPS LCD				Requires optional color LCD, Recommended color LCD with touch panel control
Screen Size	9" Wide	12.1" Wide	15.6" Wide	18.5" Wide	Dependent upon display selected
Screen Resolution / Brightness	WXGA 1280 x 720 / 1000 cd/m2 (typical)	WXGA 1280 x 800 / 900 cd/m2 (typical)	FHD 1920 x 1080 / 1000 cd/m2 (typical)	FHD 1920 x 1080 / 900 cd/m2 (typical)	FHD 1920 x 1080 (recommended), XGA 1024 x 768, SXGA 1280 x 1024
Display Colors	16,770,000 colors (Chart Plotter), 64 colors (Radar/Fish Finder)				Dependent upon display selected
Language	Bulgarian, Chinese, Danish, English (USA/UK), Finnish, French, German, Greek, Italian, Japanese, Norwegian, Portuguese, Russian, Spanish, Swedish				
GPS/WAAS					
Receiver Type / Frequency	GPS: 72 channels, SBAS: 1 channel (C/A mode, WAAS) / L1 (1575.42MHz)			-	-
Time to First Fix / Accuracy	100 s (cold start) / 10 m (GPS), 7 m (MSAS), 3 m (WAAS)			-	-
Position Update Interval	100 ms or 10 Hz			-	-
CHART PLOTTER					
Cartography / Memory Capacity	MapMedia mm3d chart (C-MAP/NOAA) and CMOR capable (U.S. only) / 30,000 user points, 100,000 points for ship's tracks, 200 planned routes (500 points per route)				
Alarms	Anchor Watch, XTE, Depth*, Speed, Sea Surface Temperature*, Trip Distance, Fuel Gauge* (*external data required)				
RADAR					
Display Modes / Echo Trails	Head-up, North-up* (*Heading input required) / Interval: 15 s, 30 s, 1 min, 3 mins, 6 mins, 15 mins, 30 mins and continuous (Heading input required)				
Target Tracking	100 ARPA Targets (Radar dependent) with fully automatic target acquisition (Heading input required)			30 Targets*, 100 Targets* (NXT or X-Class) *Heading input required.	
Radar Alarms	Guard Zone, CPA/TCPA, Trigger, Video, Azimuth, Heading Line				
FISH FINDER					
Transmit Frequency*	CW: 50/200 kHz, CHIRP: 40 kHz to 240 kHz *TZT9F Single-Channel CHIRP only			50/200 kHz	
Transducer	300/600 W or 1 kW* *Matching box MB1100 required for some transducers.			600 W or 1 kW* *Matching box MB1100 required for some FURUNO transducers	
Display Range	2 to 1,200 m; shift 0 to 1,200 m			2-1, 200 m, shift: 0-500 m	
Extension Mode	ACCU-FISH™, A-Scope, Auto (Fishing/Cruising), RezBoost™, Bottom Discrimination, TruEcho CHIRP™ with compatible transducer				
Picture Advance / FF Alarms	8 steps: x4, x2, x1, 1/2, 1/4, 1/8, 1/16, stop / School of fish, School of fish for bottom lock				
SIDE-SCAN					
Transmit Frequency*	-	CHIRP 220-240 kHz			-
Transducer	-	150W each side - Thru Hull 225T-SS904, Transom Mount 225T-TM90, Paired Thru Hull 225T-PR904			-
Display Range	750 feet to each side				
Display Colors / Screen Sizes	Green, Blue, Amber, White / Full Screen, 1/2 Screen, 1/4 Screen				
Direct Connect to MFD	Direct connect to TZT12F, TZT16F, TZT19F only; may be networked with TZT9F/TZT22X/TZT24X/TZT2BB				
INTERFACE					
NMEA 2000	1 Port				
Input	065280, 126992/993/996, 127237/245/250/251/257/488/489/505, 128259/267, 129025/026/029/330/038/039/040/041/291/538/540, 129793/794/798/801/802/808/809/810, 130306/310/311/312/313/314/316/576/577/578, 130817/818/820/822/823/826/827/828/880				
Output	126992/993/996, 127250/251/257/258, 128259/267/275, 129025/026/029/033/283/284/285, 130306/310/311/312/313/314/316				
NMEA 0183	1 Serial Output Port				
Output	AAM, APB, BOD, DBT, DPT, GGA, GLL, GNS, GSA, GSV, RMB, RMC, RTE, TTM, VDM, VTG, WPL, XTE, ZDA				
LAN	1 Port (100 BASE-TX)	2 Ports (100 BASE-TX)			3 Ports (100 BASE-TX)
USB	1 Port (USB 2.0) for control unit	1 Port (USB2.0) for touch monitor and control unit	1 Port (USB 2.0) for touch monitor and control unit: 1 Port USB output		5 Ports (USB2.0)
Video I/O	-	Input: 2 Ports (NTSC/PAL) Output: 1 Port (HDMI 720p)	Input: 2 ports (NTSC/PAL) and 1 port HDMI 1920 x 1080p or less (progressive only) Output: 1 port (HDMI 1080p)		Input: 2 Ports (PAL), 1 Port (HDMI, FHD 1920 x 1080p, SXGA 1280 x 1024p, XGA 1024 x 768p) Output: 2 Ports (HDMI, FHD 1920 x 1080p, SXGA 1280 x 1024p, XGA 1024 x 768p)
AUX I/O	2 Ports (Event Switch and External Power Switch)				1 Port (External Event/MOB Input/Power switch/Alarm Output)
SD Card Slot	1 Slot (Micro SDXC, rear)				2 Internal Slots (SDXC card - supports up to 256 GB)
Wireless LAN	IEEE802.11b/g/n, Transmit frequency: 2.412 to 2.462 GHz, 11dBm max				IEEE802.11b/g/n, Transmit frequency: 2.4 GHz band
Transducer Connection	1 Port x MJ10 pin	1 Port x MJ12 pin for transducers, 1 Port x MJ7 pin for DI-FFAMP			1 Port
ENVIRONMENT					
Temperature (IEC60945)	-15°C to +55° C				
Relative Humidity	93% or less at +40° C				
Waterproofing	IP56				Processor: IP22, Switch Box: IP56, Control Unit (optional): IP56
POWER					
	12-24 VDC				
	2.6 - 1.3 A	2.3 - 1.2 A	4.3 - 2.2 A	4.7 - 2.3 A	2.6 - 1.3A

Drawings - NavNet TZtouch3

Refer to Online manual for more details. For illustration purposes only; not drawn to scale. *Bracket is optional


TZT9F

Multi Function Display (Tabletop Mount) TZT9F* 3.5 kg 7.7 lb

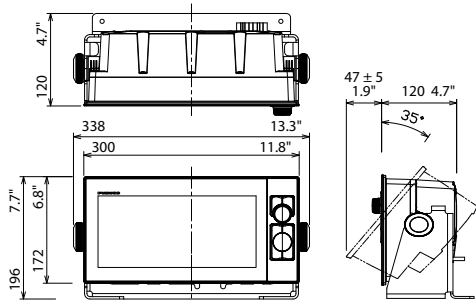


TZT12F

Multi Function Display (Tabletop Mount) TZT12F* 5.6 kg 12.3 lb

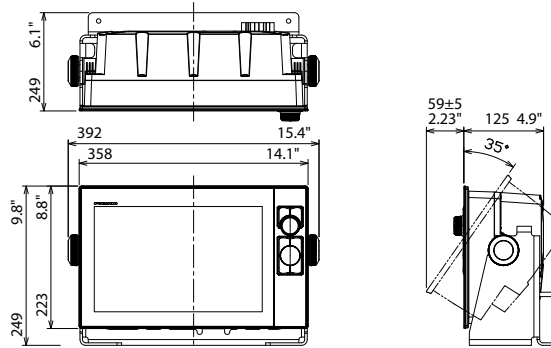


TZT16F


Multi Function Display (Tabletop Mount) TZT16F* 6.7 kg 14.7 lb

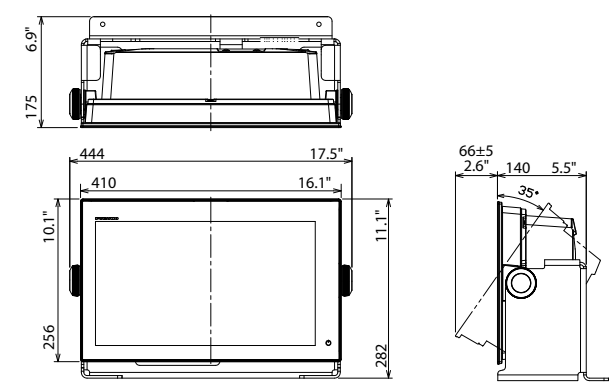


Multi Function Display (Flush Mount) TZT9F 3.3 kg 7.3 lb

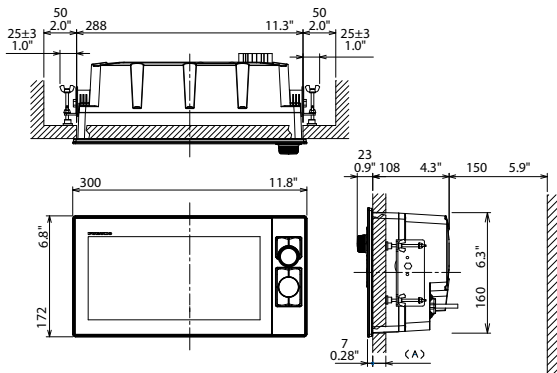


Multi Function Display (Flush Mount) TZT12F 5.1 kg 11.2 lb

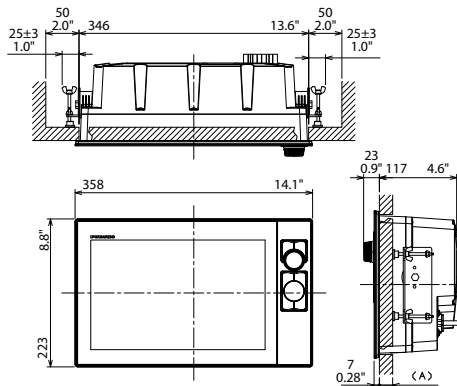


Multi Function Display (Flush Mount) TZT16F 5.9 kg 13.0 lb

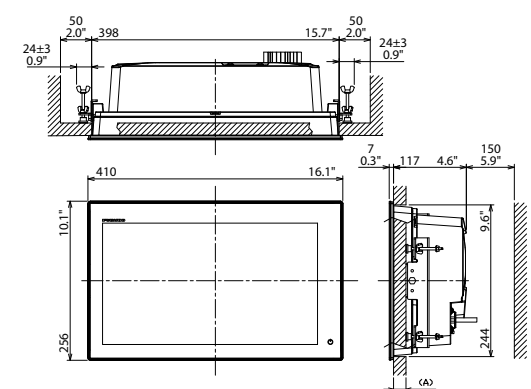


Multi Function Display Flush Mount TZT9F Cutout Dimension

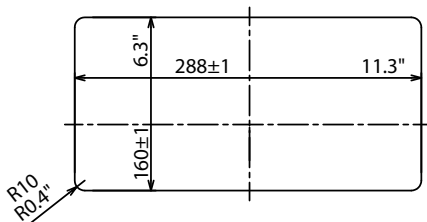

Multi Function Display Flush Mount TZT12F Cutout Dimension

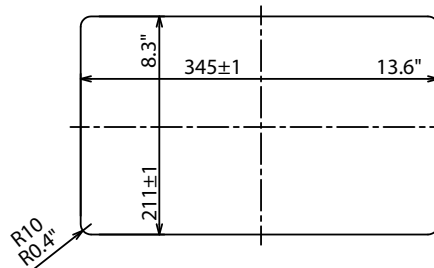

Multi Function Display Flush Mount TZT16F Cutout Dimension

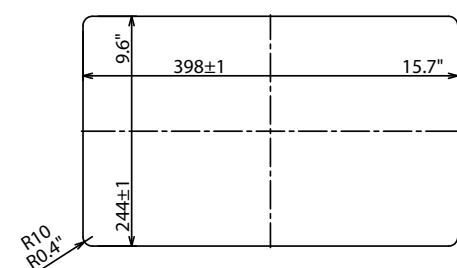


Drawings - NavNet TZtouch3 Continued


TZT19F

Multi Function Display (Flush Mount) TZT19F

7.8 kg 17.2 lb

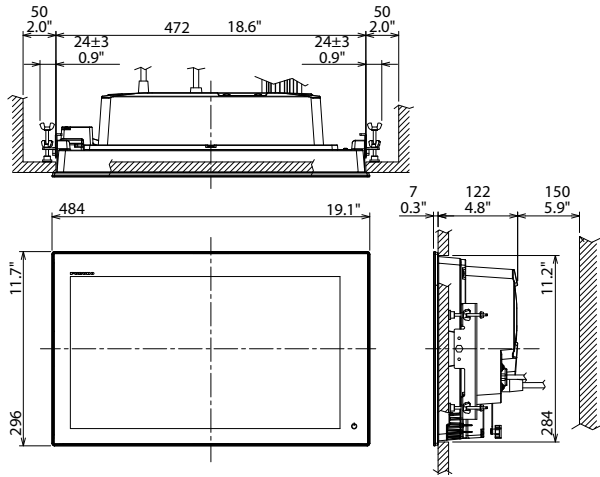


Multi Function Display Flush Mount TZT19F Cutout Dimension

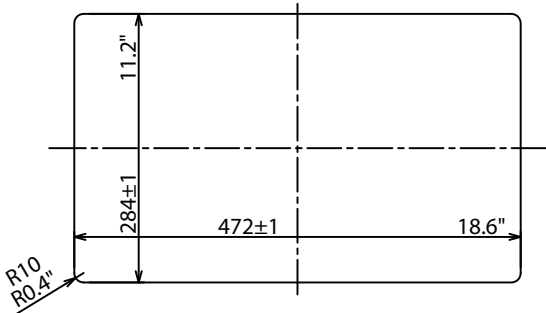

Touch Encoder Unit TEU001B/S (option, U.S. and Canada only)


0.12 kg 0.26 lb

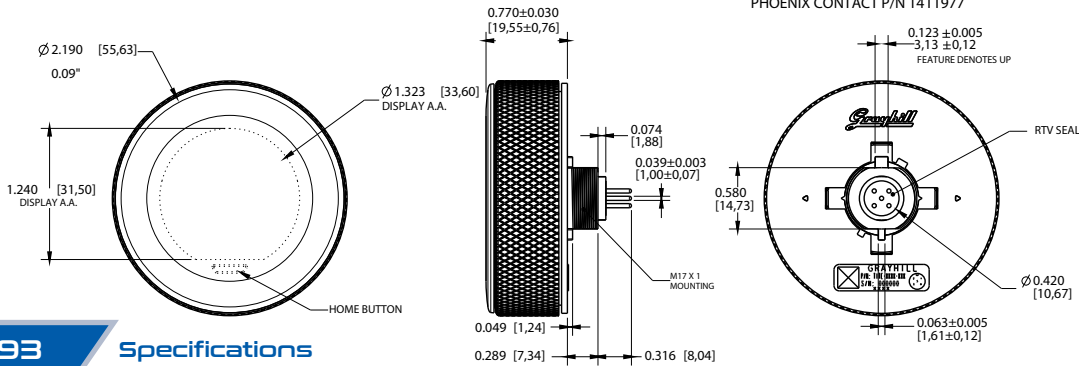

TZT2BB


Multi Function Display Black Box TZT2BB MPU004

3.9 kg 8.6 lb

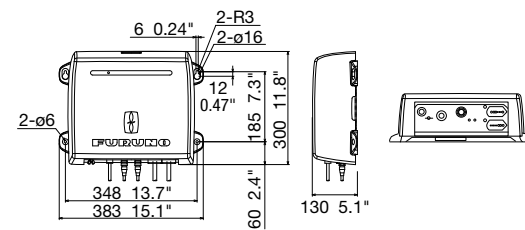

TZT2BB Switch Box PSD003


0.75 kg 1.7 lb

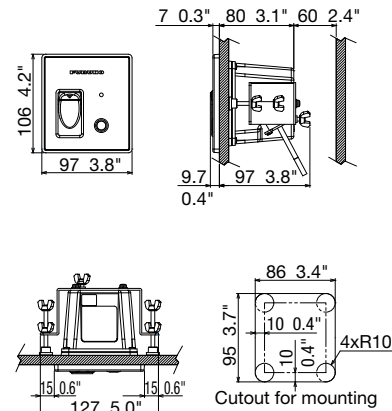

Controllers and Storage


Remote Control Unit MCU002 (option) 0.14 kg 0.3 lb

Remote Control Unit MCU004 (option) 0.4 kg 0.9 lb

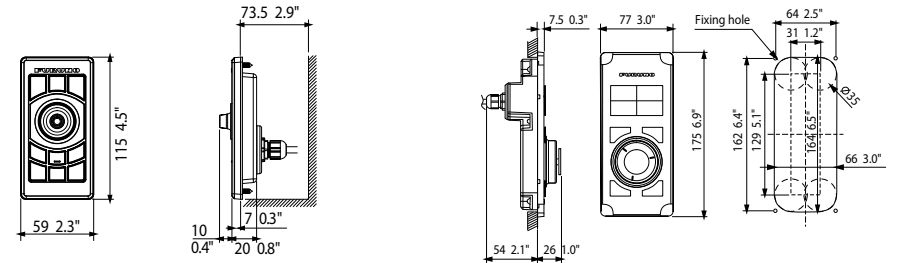


Control Unit MCU005 (option)

1.0 kg 2.2 lb

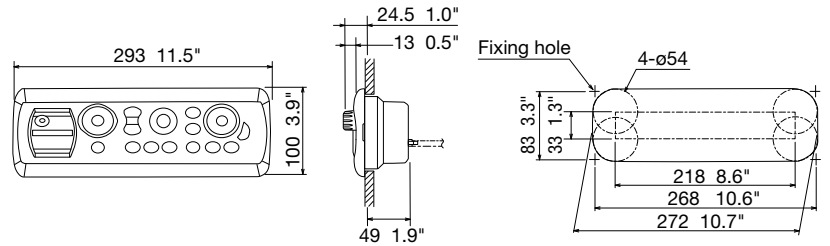


Control Unit MCU006 (option)

0.2 kg 0.44 lb

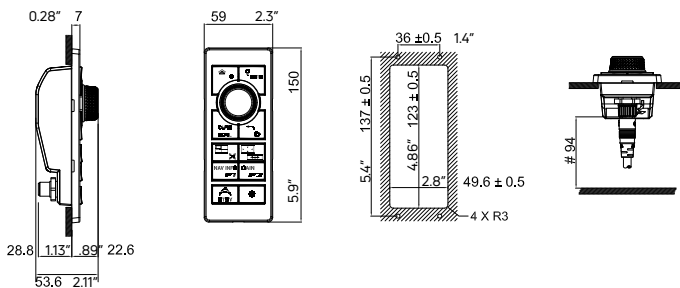

Control Unit MCU006H (option)

0.2 kg 0.44 lb

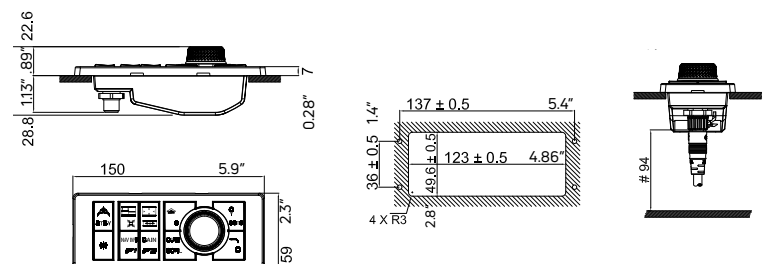

NavNet Series Network Fish Finders

MODEL	BBDS1	DFF1-UHD	DFF3-UHD	DFF3	
TRANSCIVER & DISPLAY					
Display Modes	Single (50 or 200 kHz), Dual (50 and 200 kHz), Bottom-lock, Bottom-Zoom, ACCU-FISH™*, Bottom Discrimination*, Marker Zoom, A-scope *Compatible transducer required	Single (High or Low frequency), Dual (Both High and Low frequencies), Bottom-lock, Bottom-Zoom, ACCU-FISH™*, Bottom Discrimination*, Marker Zoom, A-Scope *Compatible transducer required	Single (high or low), Dual, Bottom-lock, Bottom-Zoom, ACCU-FISH™*, Marker Zoom, A-scope *Compatible transducer required	Single (high or low), Dual (high and low), Bottom-lock, Bottom-Zoom, ACCU-FISH™*, Marker Zoom, A-scope *Compatible transducer required	
Frequency	Dual frequency 50/200 kHz	Dual frequency 30-70 kHz and 175-225 kHz	The synthesized transducer works with dual frequencies between 28 and 200 kHz	The synthesized transducer works with dual frequencies between 28 and 200 kHz	
Broadband (CHIRP)	N/A	Yes	Yes	N/A	
Range Scale	Max. 1,200 m	Max. 1,200 m	Max. 12,000 m	Max. 3,000 m	
ENVIRONMENT					
Temperature	-15°C to +55° C				
Waterproofing	IP20	IP55	IP20		
POWER SUPPLY					
	12-24 VDC				
	12 W, 1.1-0.4 A	30 W, 2.8-1.4 A	3.0-1.6 A (stand-by: 0.8-0.4 A)	30 W, 2.8-1.4 A	
TRANSDUCERS					
SPECIFY WHEN ORDERING	600 W 50/200 kHz: 520-5PSD (Plastic, thru-hull), 520-5MSD (Bronze, thru-hull), 525-5PWD (Plastic, transom), 525STID-MSD (Bronze, thru-hull with speed/temp sensor), 525STID-PWD (Plastic, transom with speed/temp sensor) 1 kW (Optional Matching Box, MB1100 may be required) 50/200 kHz: CA50/200-1T, CA50/200-12M	1 kW Broadband transducers by AIRMAR® 42-65 kHz (low), 130-210 kHz (high) CM265LH, B265LH (with temperature sensor) CM275LHW, B275LHW	CHIRP 2/3 kW 2kW/1kW: PM111LHW, R109LHW 2kW/2kW: PM111LH, PM411LWM, R109LH, R109LM, R111LH, R111LM, R409LWM, 165T-PM542LM 3kW/1kW: R509LHW 3kW/2kW: CM599LH, CM599LM, R509LM, R599LH, R599LM	CW 2/3/5/10 kW 28 kHz: CA28BL-6HR, CA28BL-12HR, CA28F-38M, CA28F-72 38 kHz: CA38BL-9HR, CA38BL-15HR 50 kHz: CA50BL-12HR, CA50BL-24HR, CA50F-38, CA50F-70 68 kHz: CA68F-30H, CA82B-35R 82 kHz: CA82B-35R 88 kHz: CA82B-35R, CA88B-10, CA88F-126H 107 kHz: CA82B-35R, CA100B-10R 150 kHz: CA150B-12H 200 kHz: CA200B-8/8B, CA200B-12H	1/2/3 kW 28 kHz: CA28F-8, CA28BL-6HR, CA28BL-12HR 38 kHz: CA38BL-9HR, CA38BL-15HR 50 kHz: CA50B-6/6B, CA50B-9B, CA50BL-12HR, CA50BL-24HR 68 kHz: CA68F-8H, CA68F-30H 82 kHz: CA82B-35R 88 kHz: CA88B-8, CA88B-10, CA88F-126H 107 kHz: CA100B-10R 150 kHz: CA150B-12H 200 kHz: CA200B-5S, CA200B-8/8B, CA200B-12H 50/200 kHz: CA50/200-1T


More Transducer options are available. Contact your Furuno dealer.

Drawings

Refer to Online manual for more details. For illustration purposes only; not drawn to scale.


BBDS1

Network Fish Finder/Bottom Discrimination Sounder 1.3 kg 2.9 lb

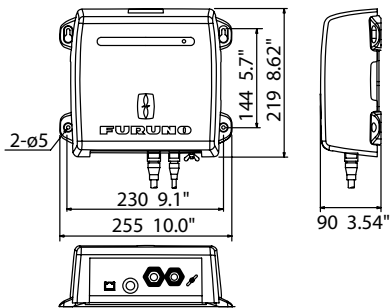


DFF1-UHD

Network Fish Finder 3.1 kg 6.8 lb

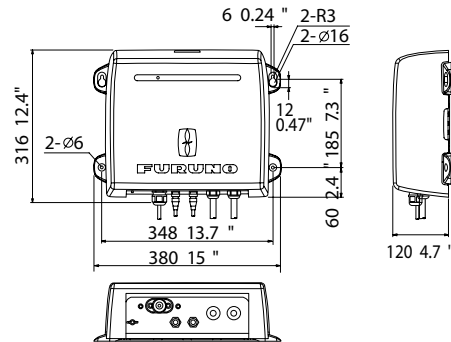


DFF3-UHD

Network Fish Finder 3.8 kg 8.4 lb

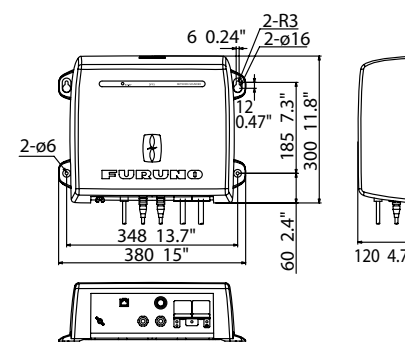

DFF3

Network Fish Finder 3.8 kg 8.4 lb

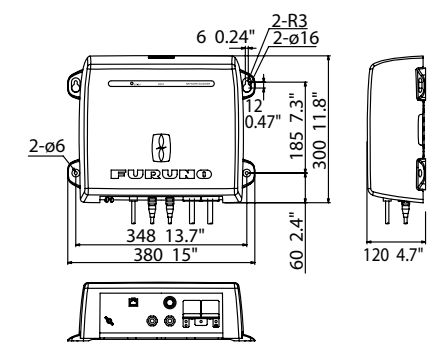


NavNet Series Multibeam Sonar

MODEL	DFF3D
TRANSCIVER & DISPLAY	
Display Mode	Cross Section, Triple/Single Beam Sounder, Side Scan, 3D Sounder History
Frequency	165 kHz
Beam Angle	60° Port/Stbd, 20°-50° from right under for Triple Beam Sounder
Detection Range	200 m* (Side beam best performance) 300 m* (Main beam directly under boat) * Depending on bottom type and water conditions.
Range Scale	5-1, 200 m
INTERFACE	
LAN	1 port, Ethernet 10/100Base-TX
External KP	1 port (optional external KP kit required)
ENVIRONMENT	
Temperature	-15°C to +55° C
Waterproofing	IP55
POWER SUPPLY	
	12-24 VDC, 1.4-0.7 A
TRANSDUCER	
SPECIFY WHEN ORDERING	165T-TM54 Transom Mount Transducer with Motion Sensor 165T-B54 Through Hull Transducer with Motion Sensor 165T-CM54 Pocket or Keel Mount Transducer with Motion Sensor 165T-SS54 Stainless Steel Through Hull Transducer with Motion Sensor 165T-50/200-TM260 Transom Mount Combo Transducer 165T-50/200-SS260 Stainless Steel Through Hull Combo Transducer 165T/265LH-PM488 Pocket Mount Combo Transducer 165T/275LHW Pocket Mount Combo Wide Beam Transducer 165T-PM542LM Pocket Mount Combo Transducer 165T-PM542LHW Pocket Mount Combo Transducer

DFF3D

Network Multibeam Sonar

3.0 kg 6.6 lb

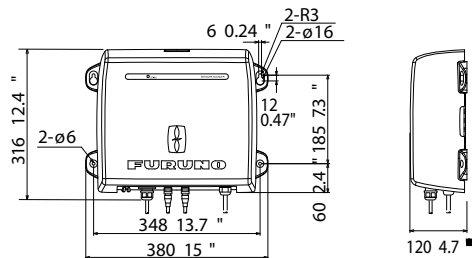

NavNet TZtouch3 "Deep Impact" Power Amplifier


MODEL	DI-FFAMP
TRANSCIVER & DISPLAY	
Display Modes	Single (High or Low frequency), Dual (Both High and Low frequencies), Bottom-lock, Bottom-Zoom, A-Scope
Frequency	26.6 to 242 kHz
Broadband (CHIRP)	Available 2 ch
Range Scale	Max. 3,000 m
Output Power	2 kW/3 kW
ENVIRONMENT	
Temperature	-15° C to +55° C
Waterproofing	IP22
POWER SUPPLY	
	12-24 VDC, 43.1 W, 3.2-1.9 A
TRANSDUCER	
(SPECIFY WHEN ORDERING)	<p>2 kW Dual-Band CHIRP PM111LH, PM111LHW, R109LH, R109LHW, R111LH</p> <p>2/3 kW Dual-Band CHIRP CM599LH, CM599LHW, R509LH, R509LHW, R509LM, R599LH, R599LM</p> <p>2 kW Single-Band CW 28BL-6HR, 38BL-9HR, 50BL-12HR, 82B-35R, 88B-10, 200B-8/8B</p> <p>3 kW Single-Band CW 28BL-12HR, 38BL-15HR, 50BL-24HR, 68F-30H, 100B-10R, 150B-12H</p> <p>5 kW Single-Band CW* 28F-38M**, 50F-38**, 88F-126H, 200B-12H</p> <p>10 kW Single-Band CW* 28F-72**, 50F-70**</p> <p>*Rated power of these transducer is 5/10 kW, but actual output power from DI-FFAMP is 3 kW. **Booster Box BT-5 is needed for these transducers.</p>

NOTE: DI-FFAMP Requires connection to the TZT3 Internal Fish Finder.
*5 kW & 10 kW are CW and require BT-5 booster box.

DI-FFAMP

Network Sounder Power Amplifier "Deep Impact"

7.0 kg 15.4 lb

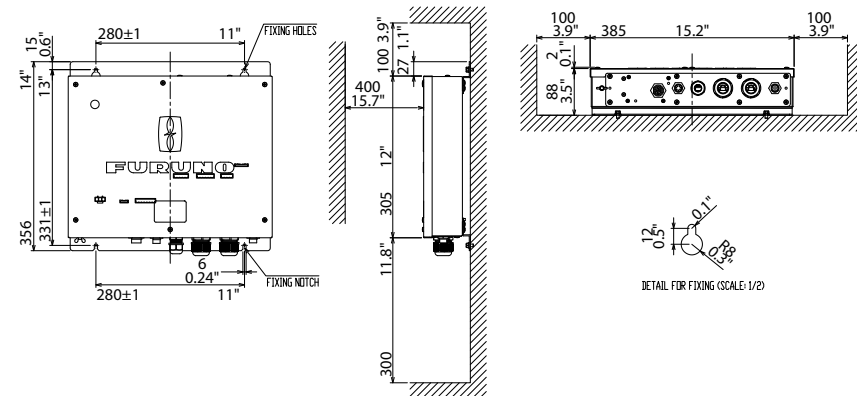

NavNet Series Radar


MODEL	DRS4DL+	DRS2DNXT	DRS4DNXT	DRS6ANXT	DRS12ANXT	DRS25ANXT
ANTENNA						
Type	ø488 mm Radome (19")		ø610 mm Radome (24")	ø1036 mm Open (3.5') 1255 mm Open (4') 1795 mm Open (6')	1036 mm Open (3.5') 1255 mm Open (4') 1795 mm Open (6')	1036 mm Open (3.5') 1255 mm Open (4') 1795 mm Open (6')
Beam Width	Horizontal	5.2°	5.2° typical (-3 dB) Adjustable between 2.6° and 5.2° (effective with RezBoost™ control)	3.9° typical (-3 dB) Adjustable between 2° and 3.9° (effective with RezBoost™ control)	2.3°/1.9°/1.35° (effective with RezBoost™ control)	2.3°/1.9°/1.35° (effective with RezBoost™ control)
	Vertical	25°				
Antenna Rotation Speed	24 rpm	24*/36/48 rpm range coupled or 24 rpm fixed * In dual range mode, speed is limited to 24 rpm				
RF TRANSCEIVER						
Frequency	9410 ± 30 MHz				CH1: 9380 MHz (PON), 9400 MHz (QON) CH2: 9400 MHz (PON), 9420 MHz (QON) CH3: 9420 MHz (PON), 9440 MHz (QON)	
Peak Output Power	4 kW	Solid-State, 25 W			Solid-State, 100 W	Solid-State, 200 W
Range Scales	0.0625 to 36* NM	0.0625 to 48* NM *In dual range mode, range is limited to 12 NM			0.0625 to 72* NM *In dual range mode, range is limited to 12 NM	0.0625 to 96* NM *In dual range mode, range is limited to 12 NM
ENVIRONMENT						
Temperature	-25° C to +55° C, Waterproofing: IPX6	-25° C to +55° C, Waterproofing: IP26			-25° C to +55° C, Waterproofing: IP56	
POWER SUPPLY						
	12-24 VDC, 2.1-1.0 A	12-24 VDC, 2.5-1.3 A			12/24 VDC, 9.5/5.0 A	24 VDC, 5.0 A

Drawings

Refer to Online manual for more details. For illustration purposes only; not drawn to scale.


DRS4DL+

19" Radome Radar Sensor DRS4DL+ 5.7kg 12.7 lb




DRS2DNXT

19" Radome Radar Sensor DRS2D-NXT 6.5kg 14.3 lb




DRS4DNXT

24" Radome Radar Sensor DRS4D-NXT 7.3kg 16.1 lb



DRS6A/12A/25ANXT

3.5 ft Open Antenna 22 kg 48.5 lb
4 ft Open Antenna 25 kg 55.1 lb
6 ft Open Antenna 27kg 59.5 lb

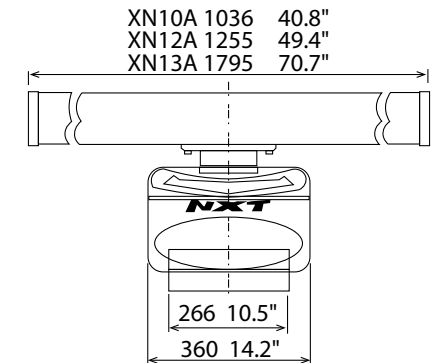

NavNet Series Radar Continued

MODEL	DRS6AX X-Class	DRS12AX X-Class	DRS25AX X-Class
ANTENNA			
Type	1036 mm Open (3.5') 1255 mm Open (4') 1795 mm Open (6')		1255 mm Open (4') 1795 mm Open (6')
Beam Width	Horizontal Vertical	2.3°/1.9°/1.35°	
Antenna Rotation Speed	22°/22°/22° 24*/36/48 rpm range coupled or 24 rpm fixed * In dual range mode, speed is limited to 24 rpmv		
RF TRANSCEIVER			
Frequency			
Peak Output Power	6 kW	12 kW	25 kW
Range Scales	0.0625 to 96 NM		
ENVIRONMENT			
Temperature	Temperature: -25° C to +55° C, Waterproofing: IP56		
POWER SUPPLY			
	24 VDC, 4 A	24 VDC, 4.5 A	24 VDC, 5.6 A




DRS6AX/12AX/25AX X-Class

3.5 ft Open Radar Sensor DRS6AX X-Class
4 ft Open Radar Sensor DRS6AX X-Class
6 ft Open Radar Sensor DRS6AX X-Class

20.0 kg 44.1 lb
21.0 kg 46.3 lb
23.0 kg 50.7 lb

4 ft Open Radar Sensor DRS12AX X-Class
6 ft Open Radar Sensor DRS12AX X-Class
4 ft Open Radar Sensor DRS25AX X-Class
6 ft Open Radar Sensor DRS25AX X-Class

21.0 kg 46.3 lb
23.0 kg 50.7 lb
22.0 kg 48.5 lb
24.0 kg 53.0 lb

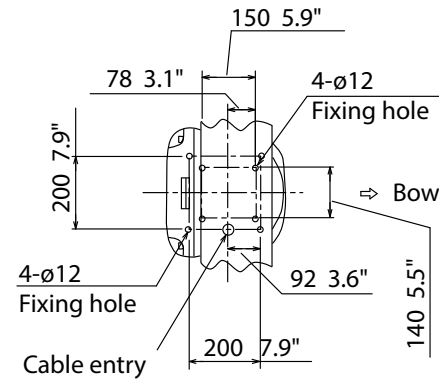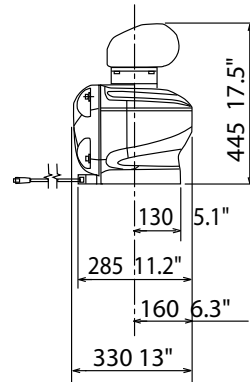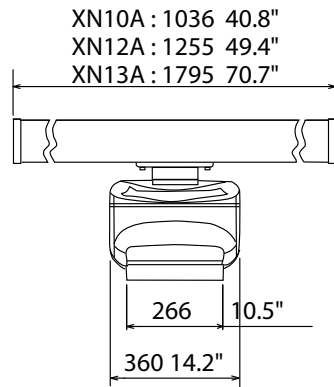

GPS/WAAS Receiver Antennas	
MODEL	GP330B
RECEIVER CHARACTERISTICS	
Receiver Type	65 channels, C/A code, all-in-view, WAAS, 10 Hz
Receiving Frequency	L1 (1575.42 MHz)
Time to First Fix	90 s (cold start)
Tracking Velocity	999.9 kn
Geodetic Systems	WGS-84, NAD-27 and others
Accuracy	10 m (GPS), 7 m (MSAS), 3 m (WAAS)
ENVIRONMENT (IEC 60945 test method)	
Temperature	-25° C to +55° C
Waterproofing	IEC 60529 IP56
POWER SUPPLY	
	12-24 VDC, LEN2
	1.4 W, 90-45 mA max.


TimeZero PC Marine Software		
SOFTWARE VERSION	TZ Navigator V5	TZ Professional V5
Processor	CPU Intel® Core™ i5 4 th generation or equivalent	CPU Intel® Core™ i5 6 th generation or equivalent
Operating System	Microsoft® Windows® 10/11 (64-bit operating system)	
RAM Memory	4 GB of RAM	8 GB of RAM (16 GB recommended)
Graphics Card	Intel HD4400 Graphic Chipset or equivalent	Minimum: Intel HD Graphic 510 (i5 6 th generation or above) Recommended: (for PBG and Multi monitor) - Dedicated Video Board or Intel Iris Plus Graphics
Screen Resolution	1280 x 800	1024 x 768 or higher (1280 x 800 or above highly recommended)
HDD	40 GB of free space (Solid State recommended)	Solid State with 60 GB of free space
Serial or USB port	For connecting instruments via NMEA0183, Actisense USB NGT-1 for connecting instruments via NMEA2000, or 100 Base-T Network Adapter for Furuno Ethernet Sensors	

Drawings

Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

GP330B

GPS/WAAS Receiver Antenna 0.22 kg 0.49 lb



1st Watch Wireless Radar


DRS4W

MODEL		DRS4W
ANTENNA		
Type	ø488 mm Radome (19")	
Beam Width	Horizontal	7.2°
	Vertical	25°
Antenna Rotation Speed	24 rpm	
RF TRANSCEIVER		
Frequency	9410 ±30 MHz	
Peak Output Power	4 kW	
Range Scales	0.125 to 24 NM	
WIRELESS LAN		
Number of connectable devices	2 units	
Transmit frequency	2.4 GHz band	
APPLICATION		
Name	"Marine Radar" from Apple App Store (Free of charge)	
Display (customer supply)	iPad/iPad mini/iPhone, iOS 6.1 or later	
Screen Orientation	Portrait/Landscape (iPad, iPad mini only)	
Language	English	
Mode	Full screen, Day/Night, Gain (auto), STC (auto), Rain, Auto Noise rejector, Guard Zone Off center, Cursor position* * iPad, iPad mini	
ENVIRONMENT		
Temperature: -25° C to +55° C, Waterproofing: IP26		
POWER SUPPLY		
12-24 VDC, 2.1-1.0 A max.		

DRS4W

1st Watch Wireless Radar DRS4W

5.7 kg 12.5 lb

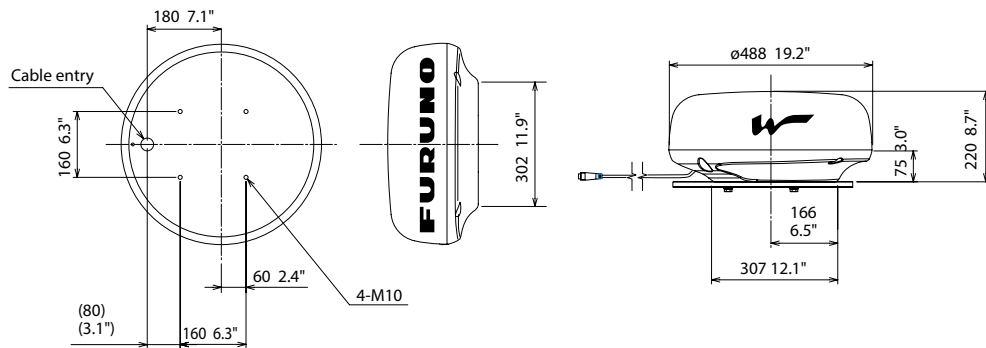


		8.4" Color LCD Radar	
MODEL		MODEL1815	
ANTENNA			
Type		ø488 mm radome (19")	
Beamwidth	Horizontal	5.2°	
	Vertical	25°	
Rotation speed		24 rpm	
RF TRANSCEIVER			
Frequency		9410 ± 30 MHz	
Output power		4 kW	
IF frequency		IF: 60 MHz BW: 20MHz (0.625 to 0.5 NM), 4.5 MHz (0.75 to 36 NM)	
DISPLAY			
Display unit		8.4" color LCD	
Effective Display Area		128.2 (W) x 170.9 (H) mm	
Screen Resolution		640 x 480, VGA	
Accuracy	Range	1.0% of range in use or 0.01 NM, which is greater	
	Bearing	EBL Accuracy ± 1°	
Range and Range Ring interval	Range	0.625, 0.125, 0.25, 0.5, 0.75, 1, 1.5, 2, 3, 4, 6, 8, 12, 16, 24, 36 NM	
	Ring	0.03125, 0.0625, 0.125, 0.125, 0.25, 0.25, 0.5, 0.5, 1, 1, 2, 2, 3, 4, 6, 12 NM	
Echo trail		Interval: 15 s, 30 s, 1 min, 3 min, 6 min, 15 min, 30 min, or continuous	
TT targets		Up to 10	
AIS targets		Up to 100 (Data input from AIS is required.)	
Interface (IEC61162, NMEA0183)	Input	ALR, BWC, BWR, DBT, DPT, DTM, GGA, GLL, GNS, GSA, GSV, HDG, HDT, HDM, MTW, MWV, RMB, RMC, THS, TTM, VDM, VHW, VTG, VWR, VWT, XTE, ZDA	
	Output	ACK, RSD, TLL*, TTM* *external data required	
ENVIRONMENT			
Temperature	Display unit	-15° C to +55° C	
	Antenna unit	-25° C to +55° C	
Waterproofing	Display unit	IP56	
	Antenna unit	IPX6	
POWER SUPPLY			
	Display unit	12-24 VDC: 3.2-1.6 A	


Drawings Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

MODEL1815


Display Unit (Bracket Mount) 2.2 kg 4.9 lb

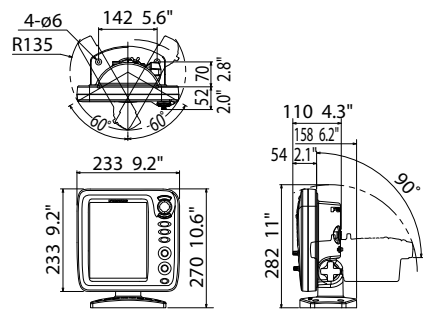

Display Unit (Flush Mount) 1.6 kg 3.5 lb

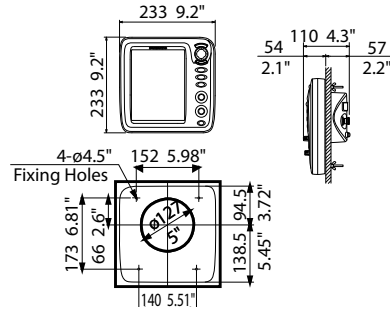

Antenna 6.5 kg 14.3 lb




10.4" and 12.1" Color LCD Radar Displays

MODEL	FR10	FR12
ANTENNA		
Model	DRS4DL+, DRS2D/4D/6A/12A/25A-NXT, DRS6A/12A/25A X-Class	
Output	Depending on the selected Antenna Unit	
DISPLAY UNIT		
Screen Size	10.4" Color LCD	12.1" Color LCD
Screen Resolution	800 x 600 (SVGA)	1024 x 768 (XGA)
Display Modes	Head-up, Course-up, North-up, True motion, Stern-up	
RADAR		
Range Scales	0.0625 to 36 NM (DRS4DL+) 0.0625 to 48 NM (DRS2D/4DNXT) 0.0625 to 72 NM (DRS6ANXT) 0.0625 to 96 NM (DRS6AX/12AX/25AX X-Class, DRS12A/25ANXT)	
Main Functionalities	Risk Visualizer™ Target Analyzer™ (Solid-State sensor only) Fast Target Tracking™ True Echo Trail Echo Average Sub Display Unit (2 units max) AIS Display Radar overlay on charts (FR12 only, optional chart kit required)	
INTERFACE		
Available Ports	NMEA0183 (x3), NMEA2000 (x1), LAN (x1), HDMI Output (x1), USB (x1), Contact Closure (x1)	
ENVIRONMENT		
Temperature	-15° C to +55° C	
Waterproofing	Front Panel: IP55, Rear Panel: IP22	
POWER SUPPLY		
	12-24 VDC: 1.1-0.6 A	12-24 VDC : 1.7-0.9 A


Drawings *Refer to Online manual for more details. For illustration purposes only; not drawn to scale.*

FR-10 / FR-12

FR-10 3.2 kg 7 lbs

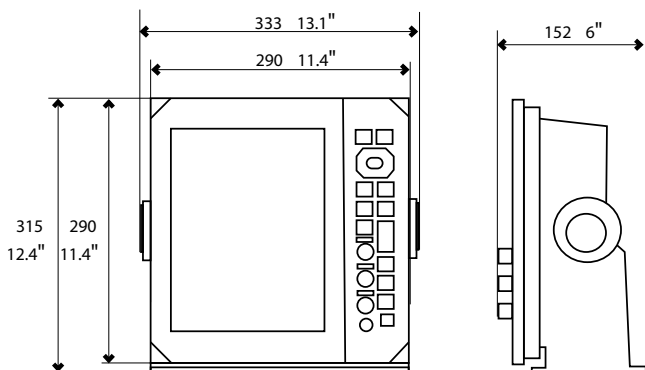

FR-12 3.9 kg 8.6 lbs

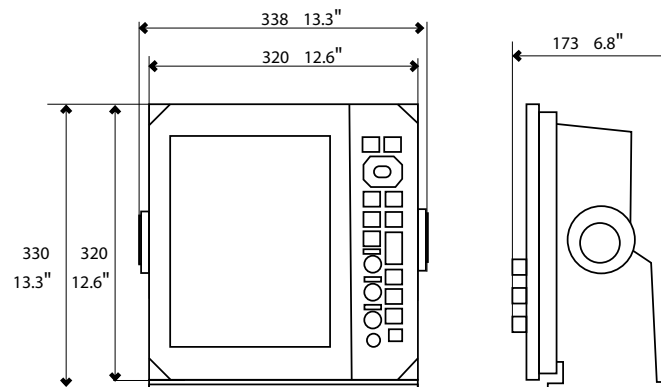

15" Multi-Color LCD Radar

MODEL	FAR1416	FAR1426
ANTENNA		
Type	1255 mm Open (4')/1795 mm Open (6')	
Beamwidth	Horizontal	1.9° (XN12A), 1.35° (XN13A)
	Vertical	22°
Rotation speed	24/48 rpm	
RF TRANSCEIVER		
Frequency	9410 ±30 MHz, P0N	
Output power	12 kW	25 kW
IF frequency	60 MHz	
DISPLAY UNIT		
Type	15" Color LCD	
Screen Size	304 (W) x 228 (H) mm, Portrait or landscape settings are available.	
Screen Resolution	1024 x 768 (XGA)	
Screen Brightness	400 cd/m2	
Language	English, Thai, Japanese	
Display Modes	Radar, Radar+Plotter, Plotter	
CHART PLOTTER		
Cartography	MapMedia mm3d chart	
Memory Capacity	30,000 points for ship's tracks, 10,000 points (50 ships) for TT, 10,000 points (100 ships) for AIS, 10,000 points (40 ships) for consort ships, 10,000 points (100 pcs) for GPS buoy, 200 planned routes (100 points per route)	
Mark/Line	30,000 pts	
RADAR		
Accuracy	Range	1% of range in use or 10 m whichever is the greater
	Bearing	±1°
Range and range ring interval	Range	0.125, 0.25, 0.5, 0.75, 1, 1.5, 2, 3, 4, 6, 8, 12, 16, 24, 32, 48, 72, 96* NM * FAR1426 only
	Bearing	0.025, 0.05, 0.1, 0.25, 0.25, 0.25, 0.5, 0.5, 1, 1, 2, 2, 4, 4, 8, 8, 12, 16* NM * FAR1426 only
Echo trail	Interval: 15 s, 30 s, 1-30 min. (30 s steps) or continuous	
TT targets	Up to 50 (manually) - Time of vector: OFF/30 s/1 to 60 min. (external data required)	
AIS targets	Up to 300 - Time of vector: OFF/30 s/1 to 60 min. (AIS, GPS and heading required)	
Radar Map	-	
INTERFACE		
Heading	1 Port: AD-10 format or IEC61162-1	
Serial	3 Ports: IEC61162-1	
Interface (IEC61162, NMEA0183)	Input	ALR, BWR, CUR, DBK, DBS, DBT, DPT, GGA, GLL, GNS, HDG, HDM, HDT, MTW, MWV, RMB, RMC, RTE, THS, TLL, TTM, VBW, VDM, VDO, VDR, VHW, VSD, VTG, VWR, VWT, WPL, ZDA
	Output	Serial port: TLL, TTM: LAN port: BWC, BWR, CUR, DBK, DBS, DBT, DPT, DTM, GGA, GLL, GNS, HDG, HDM, HDT, MTW, MWV, RMC, THS, VBW, VTG, VWR, VWT, ZDA
Interface (NMEA2000)	Input	059392/904, 060928, 061184, 126208/720/992/996, 127250/258/259, 128259/267, 129025/026/029/033/291, 130306/310/311/312/316/577/578
	Output	129038/039/040/041/044/284/285/538/794/795/797/798, 12980/802/809/810
Contact closure	3 ch: Alert output (Normal open: 2 ch, Normal close: 1 ch)	
Sub display	2 Ports (Signal: HD, BP, Trigger and Video)	
LAN	1 Port (100 BASE-TX)	
DVI-D	1 Port for main display	
RGB	1 Port	
ENVIRONMENT		
Temperature	Display unit	-15° C to +55° C
	Antenna unit	-25° C to +55° C (storage: +70° C or less)
Waterproofing	Display unit	IP20
	Antenna unit	IP26
	Control unit	IP22
POWER SUPPLY		
	24 VDC, 5 A	24 VDC, 5.6 A

Marine Radar

MODEL		FAR1513	FAR1523	FAR1518	FAR1528
ANTENNA					
Type	1255 mm Open (4') or 1795 mm Open (6')		1260 mm Open (4') or 2040 mm Open (6.5')		2040 mm Open (6.5') or 2550 mm Open (8')
Beamwidth	Horizontal	1.9° (XN12A), 1.35° (XN13A)		1.9° (XN12AF), 1.23° (XN20AF)	
	Vertical	20°			
Rotation speed	24 rpm or 48 rpm				
RF TRANSCEIVER					
Frequency	9410 MHz ±30 MHz, P0N				
Output power	12 kW	25 kW	12 kW	25 kW	
IF frequency	60 MHz				
DISPLAY					
Accuracy	Range	1% of range in use or 10 m whichever is the greater			
	Bearing	±1°			
Range and range	Range	0.125, 0.25, 0.5, 0.75, 1, 1.5, 2, 3, 4, 6, 8, 12, 16, 24, 32, 48, 96 NM		0.125, 0.25, 0.5, 0.75, 1.5, 3, 6, 12, 24, 48, 96 NM	
Ring interval	Ring	0.025, 0.05, 0.1, 0.25, 0.25, 0.5, 0.5, 1, 1, 2, 2, 4, 4, 8, 8, 16 NM		0.025, 0.05, 0.1, 0.25, 0.25, 0.5, 1, 2, 4, 8, 16 NM	
Echo trail	Interval: 15 s, 30 s, 1-30 min. (30 s steps) or continuous				
TT targets	Up to 50 in 0.2-32 NM (external data required) Tracking: 5/10 pts on all target Time of vector: 0 to 60 minutes				
AIS targets	Up to 300 (AIS, GPS and heading required) Tracking: 5/10 pts on all target Time of vector: 0 to 60 minutes				
Radar map	5,000 pts		-		-
INTERFACE (Processor unit)					
Heading	1 Port: AD-10 format or IEC61162-2				
Serial	IEC61162-2: 2 Ports (AIS/HDG), IEC61162-1: 4 Ports (GPS/LOG/AMS/ECDIS)				
Interface (IEC61162, NMEA0183)	Input	ABK, ACK, ACN, ALR, BWC, BWR, CUR, DBK, DBS, DBT, DPT, DTM, GBS, GGA, GLL, GNS, HBT, HDG, HDM, HDT, MTW, MWV, RMB, RMC, RTE, THS, VBW, VDM, VDO, VDR, VHW, VTG, VWR, VWT, WPL, ZDA		ABK, ACK, ACN, ALR, BWC, BWR, CUR, DBK, DBS, DBT, DPT, DTM, GBS, GGA, GLL, GNS, HBT, HDG, HDM, HDT, MTW, MWV, RMB, RMC, RTE, THS, VBW, VDM, VDO, VDR, VHW, VTG, VWR, VWT, WPL, ZDA	
	Output	ABM, ACK, ALC, ALF, ALR, ARC, BBM, EVE, HBT, OSD, RSD, TLB, TLL, TTD, TTM, VSD			
Contact closure	Alert output: 4 ch, Remote ACK input, System fail, power fail				
Remote display	2 Ports (Signal: HD, BP, Trigger and Video)				
LAN	1 Port (100 BASE-TX)				
DVI-D	1 Port for main display				
RGB	1 Port for VDR or RGB monitor				
ENVIRONMENT					
Temperature	Processor unit	-15° C to +55° C			
	Antenna unit	-25° C to +55° C (storage: +70° C or less)			
Waterproofing	Processor unit	IP20 (IP22: option)			
	Antenna unit	IP26			IP56
Control unit	IP22				
POWER SUPPLY					
Processor unit	24 VDC: 5.0 A max. (24 rpm), 5.6 A max. (48 rpm)	24 VDC: 6.4 A max. (24 rpm), 7.0 A max. (48 rpm)	100-115/220-230 VAC: 1.8/0.8 A (26 rpm), 2.2/1.0 A (48 rpm), or 24 VDC: 6.1 A max. (26 rpm), 7.2 A max. (48 rpm)	100-115/220-230 VAC: 2.3/1.0 A (26 rpm), 2.6/1.2 A (48 rpm), or 24 VDC: 7.5 A max. (26 rpm), 8.6 A max. (48 rpm)	



Drawings

Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

FAR1416/1426/1513/1523/1518/1528


4 ft Open Antenna
6 ft Open Antenna

25 kg 55.1 lb
27 kg 59.5 lb

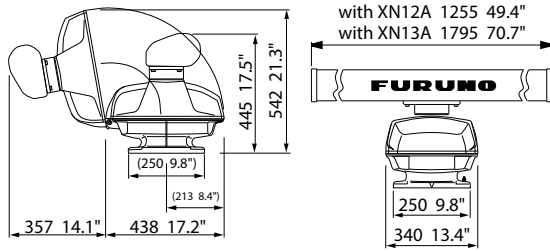


4 ft Open Antenna XN12AF

33 kg 73 lb

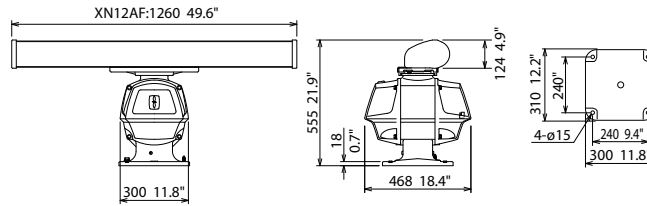


6.5 ft Open Antenna XN20AF
8 ft Open Antenna XN24AF

39 kg 86 lb
42 kg 92.6 lb

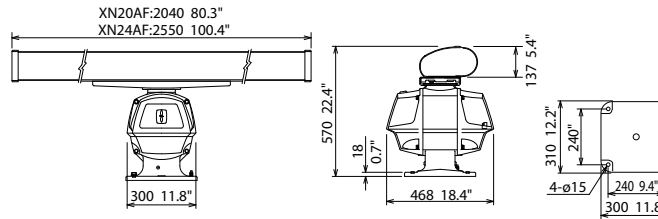


RPU024
Processor Unit


DC: 6.2 kg 13.7 lb
AC: 6.8 kg 15.0 lb

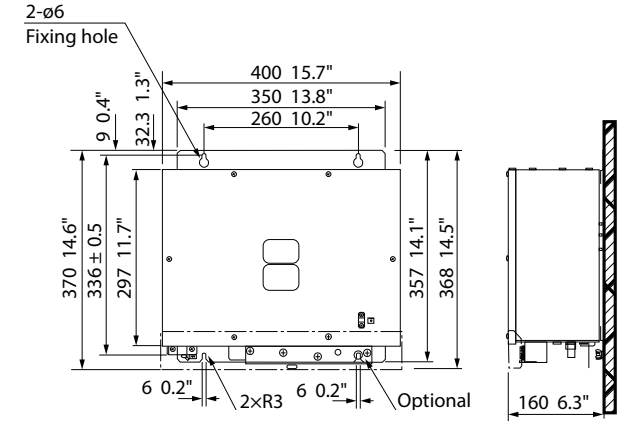


Display Unit (Portrait/Tabletop Mount) 8.5 kg 18.7 lb

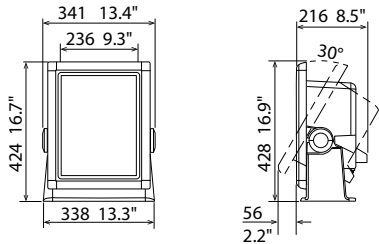


Display Unit (Portrait/Flush Mount) 8.1 kg 17.8 lb

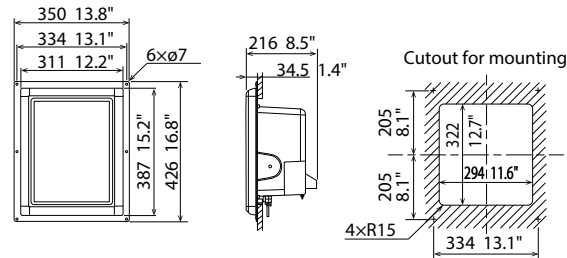


Control Unit 3.5 kg 7.7 lb




Control Unit RCU028 1.2 kg 2.6 lb

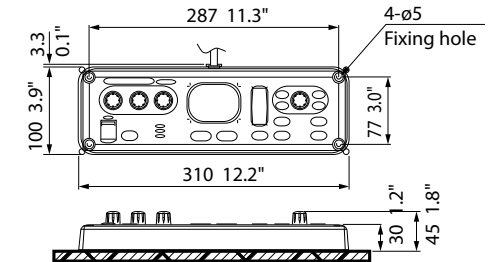


Display Unit (Horizontal/Tabletop Mount) 8.5 kg 18.7 lb

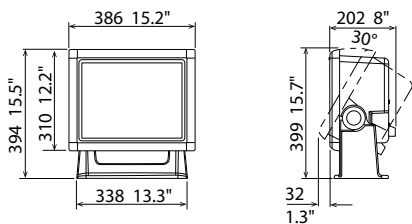

Display Unit (Horizontal/Flush Mount) 8.1 kg 17.8 lb

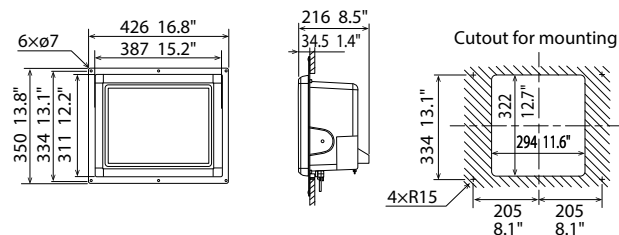

Trackball Control Unit 0.4 kg 0.9 lb

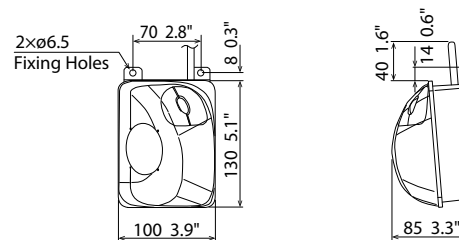

Black Box Marine Radar

MODEL		FAR2218BB	FAR2228BB
ANTENNA			
Type	1297 mm Open (4') or 2097 mm Open (6.5') or 2597 mm Open (8')		
Beamwidth	Horizontal	1.9° (4' Open: XN12CF), 1.23° (6.5' Open: XN20CF) or 0.95 (8' Open: XN24CF)	
	Vertical	20°	
Rotation speed	24 rpm or 42 rpm		
RF TRANSCEIVER			
Frequency	9410 MHz ±30 MHz, P0N		
Output power	12 kW		25 kW
IF frequency	60 MHz		
DISPLAY			
Accuracy	Range	1 % of the maximum range of the scale in use or 10 m, whichever is the greater	
	Bearing	±1°	
Range and range Ring interval	Range	0.125, 0.25, 0.5, 0.75, 1, 1.5, 2, 3, 4, 6, 8, 12, 16, 24, 32, 48, 96 NM	
	Ring	0.025, 0.05, 0.1, 0.25, 0.25, 0.25, 0.5, 0.5, 1, 1, 2, 2, 4, 4, 8, 8, 12, 16 NM	
Echo trail	Interval: 15 s, 30 s, 1, 3, 6, 15, 30 m or continuous		
TT targets	100 targets in 24/32 NM (external data required)		
AIS targets	350 targets (external data required)		
Radar Map	20,000 pts		
INTERFACE (Processor unit)			
Serial	8 ports (IEC61162-1/2: 2 ports, IEC61162-1: 4 ports, AD-10: 1 port) (1 port for sub-display unit from antenna sensor)		
Interface (IEC61162, NMEA0183)	Input	ABK, ACK, ACN, ALR, BWC, BWR, CUR, DBK ^{*1} , DBS ^{*1} , DBT, DDC, DPT, DTM, GGA, GLL, GNS, HBT, HDT ^{*1} , MTW, MWV, OSD, RQA, RMB, RMC, ROT, RTE, SRP, THS, VBW, VDM, VDO, VDR, VHW, VSD, VTG, VWR ^{*1} , VWT ^{*1} , WPL, ZDA ^{*1} for retrofit	
	Output	ABM, ACK, AIQ, ALC, ALF, ALR, ARC, BBM, DDC, EVE, HBT, OSD, RSD, SRP, TLB, TLL ^{*2} , TTD, TTM, VSD ^{*2} for B-type radar	
Contact closure	Alert output: 6 ports: contact signal, load current 250 mA (Normal close/ open: 4, system fail: 1, Power fail: 1)		
LAN	2 ports (100 BASE-TX)		
DVI	2 ports: DVI-D, DVI-I or RGB picture data (VDR)		
RS-232C	1 port: brilliance control		
Sub display (for ECDIS)	2 ports (HD, BP, Trigger and Video signal)		
ENVIRONMENT			
Temperature	Processor unit	-15° C to +55° C (storage: -20° C to +70° C or less)	
	Antenna unit	-25° C to +55° C (storage: -25° C to +70° C or less)	
Waterproofing	Processor unit	IP22	
	Antenna unit	IP56	
POWER SUPPLY			
	Processor unit	100-230 VAC: 2.2-1.1 A (24 rpm), 2.8-1.4 A (42 rpm)	100-230 VAC: 2.6-1.3 A (24 rpm), 3.9-1.7 A (42 rpm)


Black Box Marine Radar Continued

MODEL		FAR2238SBB	FAR2228NXT-BB	FAR2238SNXTBB
ANTENNA				
Type		3822 mm Open (12')	1297 mm Open (4') or 2097 mm Open (6.5') or 2597 mm Open (8')	3822 mm Open (12')
Beamwidth	Horizontal	2.6° (8' open: SN24CF) or 2.3° (10' open: SN30CF) or 1.8° (12' open: SN36CF)	1.9° (4' Open: XN12CF), 1.23° (6.5' Open: XN20CF) or 0.95° (8' Open: XN24CF)	2.6° (8' open: SN24CF) or 2.3° (10' open: SN30CF) or 1.8° (12' open: SN36CF)
	Vertical	25°	20°	25°
Rotation speed		24 rpm or 42 rpm	24 rpm or 42 rpm (Except for XN24CF)	24 rpm or 42 rpm
RF TRANSCEIVER				
Frequency		3050 MHz ±30 MHz, P0N	9410 MHz ±30 MHz, P0N	CH1 P0N: 3043.75 MHz, Q0N: 3063.75 MHz +5 MHz or CH2 P0N: 3053.75 MHz, Q0N: 3073.75 MHz +5 MHz
Output power		30 kW	Solid-state, 600 W	Solid-state, 250 W
DISPLAY				
Accuracy	Range	1 % of the maximum range of the scale in use or 10 m, whichever is the greater		
	Bearing	±1°		
Range and range Ring interval	Range	0.125, 0.25, 0.5, 0.75, 1, 1.5, 2, 3, 4, 6, 8, 12, 16, 24, 32, 48, 72, 96 NM		
	Ring	0.025, 0.05, 0.1, 0.25, 0.25, 0.25, 0.5, 0.5, 1, 1, 2, 2, 4, 4, 8, 8, 12, 16 NM		
Echo trail		Interval: 15 s, 30 s, 1, 3, 6, 15, 30 m or continuous		
TT targets		100 targets in 24/32 NM (external data required)		
AIS targets		350 targets (external data required)		
Radar Map		20,000 pts		
INTERFACE (Processor Unit)				
Serial		7 ports (IEC61162-1/2: 2 ports, IEC61162-1: 4 ports, AD-10: 1 port)		
Interface (IEC61162, NMEA0183)	Input	ABK, ACK, ACN, ALR, BWC, BWR, CUR, DBK*1, DBS*1, DBT, DDC, DPT, DTM, GGA, GLL, GNS, HBT, HDT*1, MTW, MWV, OSD, RQA, RMB, RMC, ROT, RTE, SRP, THS, VBW, VDM, VDO, VDR, VHW, VSD, VTG, VWR*1, VWT*1, WPL, ZDA *1 for retrofit		
	Output	ABM, ACK, AIQ, ALC, ALF, ALR, ARC, BBM, DDC, EVE, HBT, OSD, RSD, SRP, TLB, TLL*, TTD, TTM**, VSD **for B-type radar **external data required		
Contact closure		Alert output: 6 ports: contact signal, load current 250 mA (Normal close/ open: 4, system fail: 1, Power fail: 1)		
LAN		2 ports (100 BASE-TX)		
DVI		2 ports: DVI-D, DVI-I or RGB picture data (VDR)		
RS-232C		1 port: brilliance control		
Sub display (for ECDIS)		2 ports (HD, BP, Trigger and Video signal)		
ENVIRONMENT				
Temperature	Processor unit	-15° C to +55° C (storage: -20° C to +70° C or less)		
	Antenna unit	-25° C to +55° C (storage: -25° C to +70° C or less)		
Waterproofing	Processor unit	IP22		
	Antenna unit	IP56		
POWER SUPPLY				
	Processor unit	100-230 VAC: 3.2-1.5 A (24 rpm), 2.8-1.4 A (42 rpm)	100-230 VAC: 2.1-1.1 A (24 rpm), 5.8-2.6 A (42 rpm)	100-230 VAC: 3.0-1.5 A (24 rpm), 5.8-2.6 A (42 rpm)

FAR2218BB / FAR2228BB / FAR2238SBB / FAR2228NXTBB / FAR2238SSSDBB


10 ft S-Band Antenna SN30AF
12 ft S-Band Antenna SN36AF

135 kg 297.6 lb
142 kg 313.1 lb

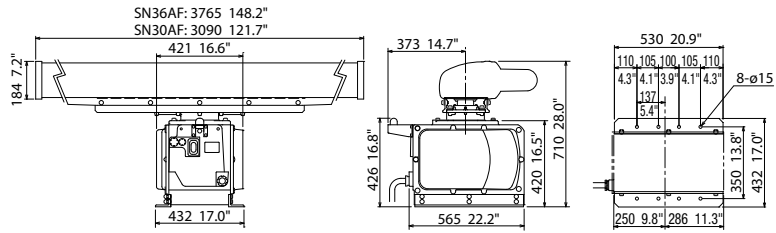


4 ft Open Antenna XN12CF
6.5 ft Open Antenna XN20CF
8 ft Open Antenna XN24CF

46.2 kg 101.9 lb
48.1 kg 106.1 lb
43.9 kg 108.7 lb

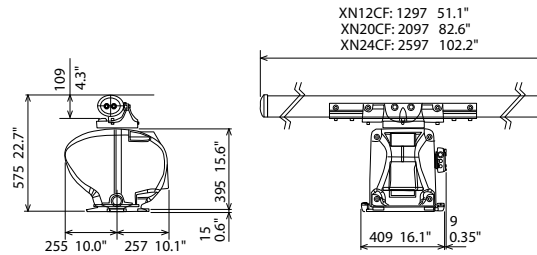


8 ft Open Antenna SN24CF
10 ft Open Antenna SN30CF
12 ft Open Antenna SN36CF

129 kg 284 lb
135 kg 297.6 lb
140 kg 308.6 lb

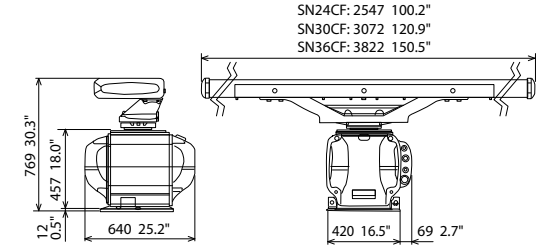


Processor Unit RPU025

10 kg 22 lb

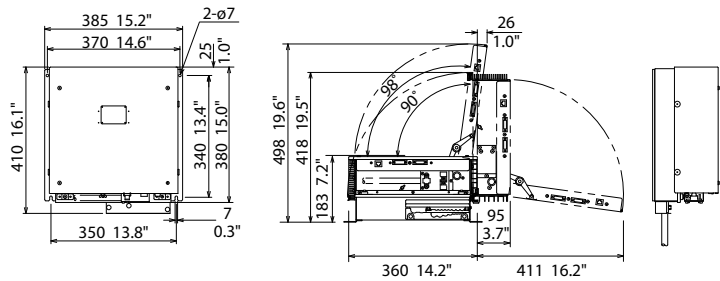

Processor Unit RPU025 for X-Band/S-band (24 rpm)
Processor Unit RPU025 for S-band (42 rpm)

9.6 kg 21.2 lb (w/ Fan)
11.5 kg 25.4 lb (w/ 2 Fans)

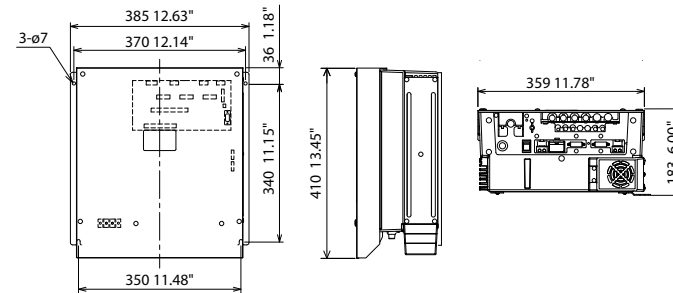

Trackball Control Unit RCU016

2.4 kg 5.3 lb

Trackball Control Unit RCU015

2.4 kg 5.3 lb

Keyboard Control Unit RCU014

3.7 kg 8.2 lb








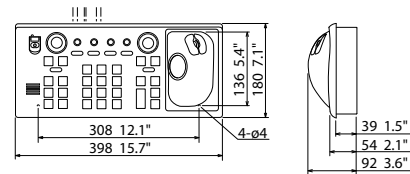


Chart Radar


MODEL		FAR3000BB (X-Band Magnetron or Solid-State)	FAR3000BB (S-band Magnetron or Solid State)
ANTENNA			
Type		1260 mm Open (4'), 2040 mm Open (6.5') or 2550 mm Open (8')	3765 mm S-band (12')
Beamwidth	Horizontal	1.9'(4' Open: XN-12CF), 1.23'(6.5' Open: XN-20CF) or 0.95'(8' Open: XN-24CF)	1.8° (12' S-band: SN-36CF)
	Vertical	20°	25°
Rotation speed		24 rpm or 42 rpm (Except for XN24CF)	
RF TRANSCIVER			
Frequency		9410 ±30 MHz	3050 ±30 MHz
Output power		12/25 kW Magnetron, 600 W Solid State	30 kW Magnetron, 250 W Solid-State
DISPLAY			
Accuracy	Range	1% of the maximum range of the scale in use or 10 m, whichever is the greater	
	Bearing	±1°	
Range and range Ring interval	Range	0.125, 0.25, 0.5, 0.75, 1, 1.5, 2, 3, 4, 6, 8, 12,16, 24, 32, 48, 72, 96 NM	0.125, 0.25, 0.5, 0.75, 1, 1.5, 2, 3, 4, 6, 8,12, 16, 24, 32, 48, 72, 96 NM
	Ring	0.025, 0.05, 0.1, 0.25, 0.25, 0.25, 0.5, 0.5, 1, 1, 2, 2, 4, 4, 8, 8, 12, 16 NM	0.025, 0.05, 0.1, 0.25, 0.25, 0.25, 0.5, 0.5, 1, 1, 2, 2, 4, 4, 8, 8, 12,16 NM
Echo trail		Interval: 15, 30 s, 30 m or continuous	
TT targets		Up to 200	
AIS targets		Up to 1000 (Data input from AIS, GPS and heading is required)	
Interface (IEC61162, NMEA0183)	Input	ABK, ACN (ACM), ALC, ALF, ALR, ARC, CUR, DBT, DDC, DPT, DTM, GGA, GLL, GNS, HBT, HCR, HDT, MTW, MWD, MWV, NRM, NRX, NSR, RMC, RRT, SRP, THS, VBW, VDM, VDO, VDR, VHW, VLW, VSD, VTG, ZDA	
	Output	ABM, ACK, ALC, ALF, ALR, ARC, BBM, DDC, EVE, HBT, OSD, RRT, RSD, RTE, SRP, TLB*, TTD*, TTM*, WPL, VSD (*external data required)	
ENVIRONMENT			
Temperature	Processor unit	-15° C to +55° C	
	Antenna unit	-25° C to +55° C	
Waterproofing	Processor unit	IP20	
	Antenna unit	IP56	
POWER SUPPLY			
	Processor unit	100-230 VAC, 1 phase, 50/60 Hz PSU014: 3.7 A PSU015: 6.4 A PSU016: 2.8 A PSU017: 5.6 A	
	Monitor unit	MU-190: 100-230 VAC, 0.7-0.4 A	MU-231: 100-230 VAC, 1.0-0.6 A
			MU-270W: 100-230 VAC, 0.7-0.4 A

FAR3000BB (S or X-Band, Solid-State or Magnetron)


4 ft Open Antenna XN12CF 46.2 kg 101.9 lb
 6.5 ft Open Antenna XN20CF 48.1 kg 106.1 lb
 8 ft Open Antenna XN24CF 43.9 kg 108.7 lb

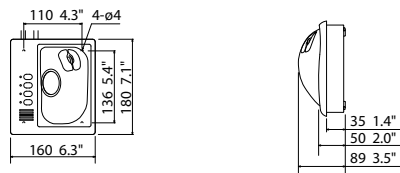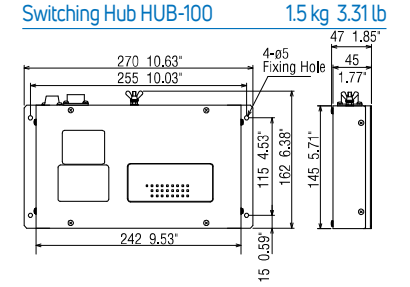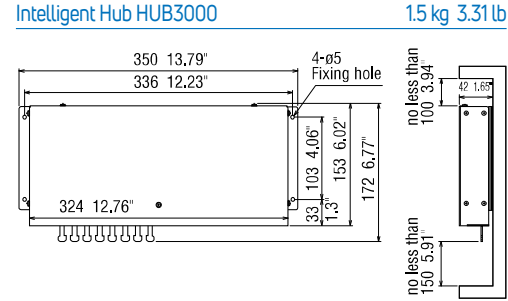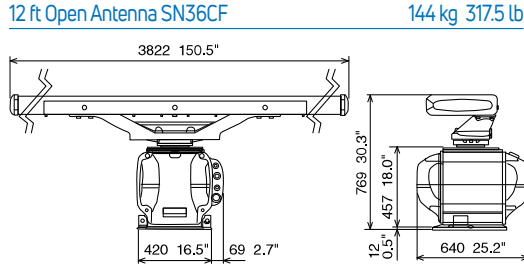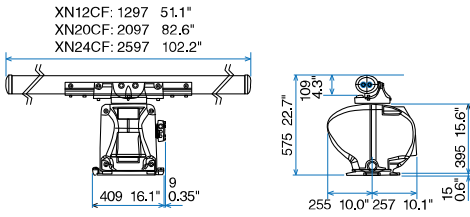


Monitor Unit MU192 8.8 kg 19.4 lb




Monitor Unit MU231 12.8 kg 28.2 lb




Monitor Unit MU270W 13 kg 28.7 lb

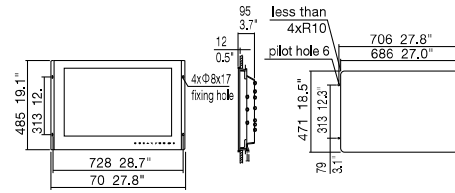


Transceiver Unit RTR108 17 kg 37.5 lb

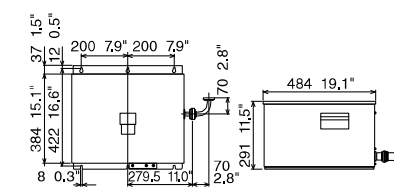


Transceiver Unit RTR109 22 kg 48.5 lb

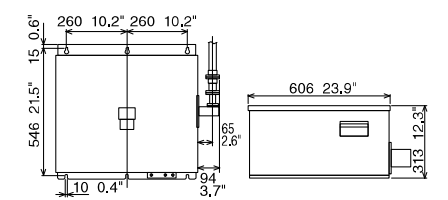


Control Unit RCU025 3.1 kg 6.84 lb

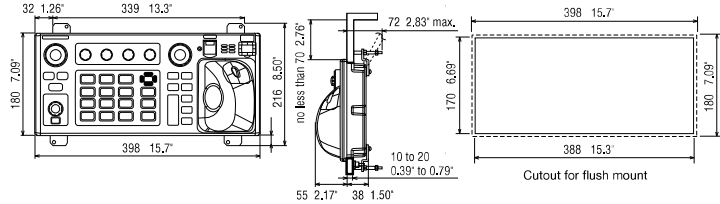


Trackball Control Unit RCU026 1.5 kg 3.31 lb

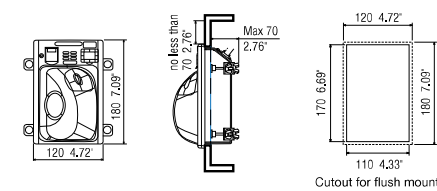


Power Supply Unit PSU014/016 8.5 kg 18.7 lb

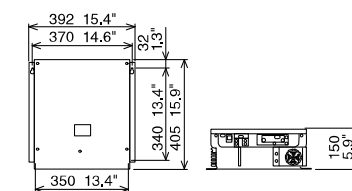


Power Supply Unit PSU015/018 10 kg 22 lb

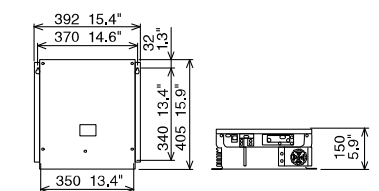


Sensor Adapter (Serial) MC3000S 1.5 kg 3.31 lb

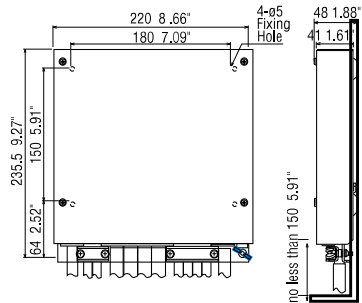


Sensor Adapter (Analog) MC3010A 0.8 kg 1.8 lb




Sensor Adapter (Digital IN) MC3020D 0.8 kg 1.8 lb



Sensor Adapter (Digital OUT) MC3030D 0.8 kg 1.8 lb



Processor Unit EC3000 14 kg 30.9 lb



4.2" GPS Navigator

MODEL		GP39
GPS/WAAS		
Receive Type	GPS	Twelve discrete channels, C/A code, all-in-view
	WAAS/SBAS	Two channels
Receive Frequency		L1 (1575.42 MHz)
Time to First FIX		90 s approx. (cold start)
Tracking Velocity		1,000 kn
Geodetic Systems		WGS-84 (and others)
ACCURACY		
GPS		10 m (2 drms)
WAAS		3 m (2 drms)
MSAS		7 m (2 drms)
DISPLAY		
Type		4.2" Color LCD
Effective Display Area		92 (W) x 52 (H) mm
Screen Resolution		480 x 272
Display Modes		Plotter, Steering, Highway, NAV data, User display, Satellite monitor (Digital, Speedometer, COG)
Memory Capacity		3,000 ship's track points; 10,000 waypoints with comments; 100 routes, 30 waypoints/route
Alarms		Arrival, Anchor watch, Cross track error, Speed, WAAS (SBAS), Time, Trip
INTERFACE		
Ports		NMEA0183: 1, USB: 1
Interface	Output	(NMEA0183) AAM, APB, BOD, BWC, BWR, DTM, GGA, GLL, GSA, GSV, RMB, RMC, VTG, XTE, ZDA
	Input	(NMEA0183) RTE, TLL
ENVIRONMENT		
Temperature	Display Unit	-15° C to +55° C
	Antenna Unit	-25° C to +70° C
Waterproofing	Display Unit	IP55
	Antenna Unit	IP56
POWER SUPPLY		
	Non NMEA2000	-

5.7" GPS DGPS Navigator

GP170

MODEL		GP170	
GPS/WAAS			
Receive Type	GPS	Twelve discrete channels, C/A code, all-in-view	
	WAAS	Two channels	
Receive Frequency	L1 (1575.42 MHz)		
Time to First FIX	90 s approx. (cold start)		
Tracking Velocity	1,000 kn		
Geodetic Systems	WGS-84 (and others)		
ACCURACY			
	GPS	10 m (2 drms, HDOP<4)	
	DGPS	5 m (2 drms, HDOP<4)	
	WAAS	3 m (2 drms, HDOP<4)	
	MSAS	7 m (2 drms, HDOP<4)	
DISPLAY			
Type	5.7" color LCD		
Effective Display Area	116.2 (W) x 87.1 (H) mm		
Screen Resolution	640 x 480		
Display Modes	Plotter, Highway, Course, Data, Integrity		
Memory Capacity	Track: 1,000 points, Mark: 2,000 points; Waypoints: 1,000 points with 20 characters comment each; Route: 100 routes (containing 1,000 waypoints each)		
Alarms	Notice: Arrival, Anchor watch, XTE, Speed, Trip		
INTERFACE			
Serial (IEC 61162-1, -2)	4 ports (1 port IEC 61162-2 In/Out; 2 ports IEC 61162-1 In/Out; 1 port IEC 61162-1 Out)		
Data port 1, 2	Input	ACK, ACN, CRQ, DBT, DPT, HBT, HDG, HDM**, HDT**, MSK, MSS, MTW, THS, TLL, VBW, VHW ** not used for SOLAS ships	
	Output	AAM, ALC, ALF, ALR, APB, ARC, BOD, BWC, BWR, BWW, DTM, GBS, GGA, GLL, GNS, GRS, GSA, GST, GSV, HBT, POS, RMB, RMC, RTE, VDR, VTG, WCV, WNC, WNR, WPL, XTE, ZDA	
Data port 3	Input	MOB from external device (contact closure)	
	Output	AAM, ALC, ALF, ALR, APA, APB, ARC, BOD, BWC, BWR, BWW, DTM, GBS, GGA, GLL, GNS, GRS, GSA, GST, GSV, HBT, MSK*, MSS**, POS, RMB, RMC, RNN, RTE, VDR, VTG, WCV, WNC, WNR, WPL, XTE, ZDA, RTCM sc104 *when either internal/external beacon receiver is used ** when internal beacon receiver is used	
Data port 4, IEC/NMEA Mode	Same as Data port 1, 2		
Ethernet (IEC 61162-450)	1 port		
	Input	ACK, ACN, DBT, DPT, HBT, HDG, HDM**, HDT**, MTW, THS, TLL, VBW, VHW ** not used for SOLAS ships	
	Output	AAM, ALC, ALF, ALR, APB, ARC, BOD, BWC, BWR, BWW, DTM, GBS, GGA, GLL, GNS, GRS, GSA, GST, GSV, HBT, POS, RMB, RMC, RTE, VDR, VTG, WCV, WNC, WPL, XTE, ZDA *when either internal/external beacon receiver is used ** when internal beacon receiver is used	
ENVIRONMENT			
Temperature	Display Unit	-15° C to +55° C	
	Antenna Unit	-25° C to +70° C	
Waterproofing	Display Unit	IP25	
	Antenna Unit	IP56	
POWER SUPPLY			
		12-24 VDC	
		0.8 - 0.4 A (w/internal beacon receiver)	

7" Wide Chart Plotter/Fish Finder

9" Wide Chart Plotter/Fish Finder

MODEL		GP1871F	GP1971F
GPS/WAAS			
Receive Type	GPS WAAS	72 channels 1 channel	
Receiving Frequency		L1 (1575.42 MHz)	
Time to First FIX		80 s approx. (cold start)	
Tracking Velocity		999 kn	
SBAS (Satellite-Based Augmentation System)		WAAS, EGNOS, MSAS	
Electronic Chart		C-MAP 4D (optional), Navionics (optional)	
ACCURACY			
Internal Antenna		GPS: 10 m Max, WAAS: 5 m Max, MSAS: 7.5 m Max	
DISPLAY			
Type	7" Wide Color TFT LCD	9" Wide Color TFT LCD	
Screen Size	154 x 85 mm	199 x 113 mm	
Screen Resolution	WVGA 800 x 480 pixels	WVGA 1280 x 720 pixels	
Screen Brightness	1000 cd/m2 (typical)	1000 cd/m2 (typical)	
Language		English (US & UK), French, Spanish, German, Italian, Portuguese, Danish, Swedish, Norwegian, Finnish, Greek, Japanese, Chinese	
Display Modes		Chart Plotter, Fish Finder, Radar*1, AIS*2, Instruments*3 (Nav Data, Engine, Wind, Fuel tank, Autopilot*4, etc.), GPS status *1: Connected to the 1st Watch Wireless Radar DRS4W required; *2: Connected to AIS sensor required; *3: Connected to external sensors required; *4: Connected to the FURUNO NAVipilot-300 or 700 series require	
Memory Capacity		30,000 points for ship's track and waypoints, 1,000 planned routes (Max. 50 points per route) 5,000 quickpoints	
FISH FINDER			
Transmit Frequency		CW: 50/200 kHz, Single-Channel CHIRP: 40 to 225 kHz	
Transducer		300 W or 600 W or 1 kW* (Transducer dependent) * Matching box MB-1100 required for some FURUNO transducers.	
Display Range		5-1,200 m, shift: 0-500 m	
Extension Mode		CHIRP*, RezBoost™**, ACCU-FISH™**, Bottom Discrimination**, Auto gain (Fishing/Cruising), Manual gain, A-Scope, Marker Zoom, Bottom Zoom, Bottom Lock *: Chirp dedicated transducer required; **: Dual frequency compatible transducer required	
Picture Advance		8 steps: x4, x2, 1/1, 1/2, 1/4, 1/8, 1/16, stop	
WIRELESS LAN			
Transmit Frequency		2.4 to 2.472 GHz (1 o 13 channels), IEEE802.11b/g/n	
Security		WAPI, IEEE802.11i advanced security	
INTERFACE			
NMEA0183		1 Port	
Interface (NMEA0183)	Input	DBT, DPT, DSC, DSE, GGA, GLL, GNS, HDG, HDT, MTW, MWV, RMA, RMC, ROT, RSA, THS, TLL, VHW, VTG, ZDA, PFEC (GPatt/SDmrk/SDtbd/SDtfl/pireq)	
	Output	AAM, APB, BOD, BWR, DBT, DPT, GGA, GLL, GNS, GSA, GSV, GTD, HDG, HDT, MTW, MWV, RMA, RMB, RMC, RTE, THS, TLL, VHW, VTG, WPL, XTE, ZDA, PFEC (SDmrk/SDtbd/SDtfl/pidat)	
NMEA2000		1 Port	
Interface (NMEA2000)	Input	126992, 127245, 127250, 127251, 127258, 127488, 127489, 127493, 127497, 127505, 128259, 128267, 128275, 129025, 129026, 129029, 129038, 129039, 129040, 129041, 129284, 129285, 129538, 129540, 129793, 129794, 129798, 129808, 129809, 129810, 130306, 130310, 130311, 130312, 130313, 130314, 130316, 130577, 130830, 130831, 130832, 130880	
	Output	126992, 127245, 127250, 127251, 127257, 127258, 127505, 128259, 128267, 128275, 129025, 129026, 129029, 129033, 129283, 129284, 129285, 130306, 130310, 130312, 130316, 130830, 130831, 130832	
Micro SD Cart Slot		2 Slots (SD, SDHC Acceptable)	
ENVIRONMENT			
Temperature		-15° C to +55° C (Storage -20° C to +70° C)	
Waterproofing		IP56	
POWER SUPPLY			
		12-24 VDC, 1.0-0.5 A	12-24 VDC, 1.1 - 0.6 A


		12.1" Chart Plotter	12.1" Chart Plotter/Fish Finder
MODEL		GP3700	GP3700F
GPS/WAAS			
Receive Type	GPS	12 channels	
	WAAS/SBAS	2 channels	
Receiving Frequency		L1 (1575.42 MHz)	
Time to First Fix		90 s approx. (cold start)	
Tracking Velocity		999 kn	
SBAS (Satellite-Based Augmentation System)		WAAS, EGNOS, MSAS	
Electronic Chart		MapMedia VECTOR	
ACCURACY			
Internal Antenna		GPS:10 m Max, DGPS: 5 m Max, SBAS: 7 m Max	
DISPLAY			
Type	12.1" Color IPS LCD		12.1" Color IPS LCD
Screen Size	246 x 184.5 mm		246 x 184.5 mm
Screen Resolution	600 x 800 pixels		600 x 800 pixels
Language	English, Chinese, Thai		
Display Modes	GP-3700: Head Up, North Up, Auto Course Up, Course Up, Go To Up, Specified Direction Up. GP-3700F: As GP-3700, plus Plotter+Dual Frequency, Plotter+Single Frequency, Dual Frequency, Single Frequency		
Memory Capacity	30,000 points for ship's track, 3,500 waypoints with comments (35 QP), 200 planned routes (Max. 100 points per route),		
FISH FINDER			
Transmit Frequency	50/200 kHz		
Transducer	600 W or 1 kW* (Transducer dependent) * Matching box MB-1100 required for some FURUNO transducers.		
Display Range	5-1,200 m, shift: 0-1,200 m		
Extension Mode	ACCU-FISH™*, Marker Zoom, Bottom Zoom, Bottom Lock, Bottom Discrimination* *Dual frequency compatible transducer required.		
Picture Advance	6 steps: x2, 1/1, 1/2, 1/4, 1/8, 1/16		
INTERFACE			
NMEA0183		3 Ports	
Interface (NMEA0183)	Input	ALR, BLV, CRQ, CUR, DBK, DBS, DBT, DPT, GGA, GLL, GNS, HDG, HDM, HDT, MSK, MTW, MWV, RMA, RMB, RMC, TLL, TTM, VDM, VDR, VHW, VTG, VWR, VWT, THS, ZDA	
	Output	AAM, APB, BOD, BWC, BWR, DBT, DPT, DTM, GGA, GLL, GNS, GSA, GSV, GTD, HDG, HDT, MSK, MSS, MTW, MWV, RMA, RMB, RMC, RTE, THS, TLL, TTM, VHW, VTG, WPL, XTE, ZDA	
NMEA2000/NMEA		1 Port	
Interface (NMEA2000)	Input	059392/904, 060928, 126208/464/996, 127237/250, 129538, 130577	
	Output	059392/904, 060928, 126208/464/992/993/996, 127258, 128267/275, 129025/026/029/033/283/284/285/538/539	
USB Port		1 Port	
ENVIRONMENT			
Temperature		-15° C to +55° C	
Waterproofing	Display	IPX2	
	Antenna	IP56	
POWER SUPPLY			
		12-24 VDC, 2.5-1.3 A	12-24 VDC, 2.8-1.5 A

Drawings


Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

GP39

Display Unit
(Bracket Mount) 0.39 kg 0.86 lb




Display Unit
(Flush Mount) 0.36 kg 0.79 lb




GP170

GPS Antenna GPA017S 0.6 kg 1.3 lb



Display Unit
(with optional flush mount kit)


2.2 kg 4.9 lb (without DGPS beacon receiver)
2.4 kg 5.29 lb (with DGPS beacon receiver)

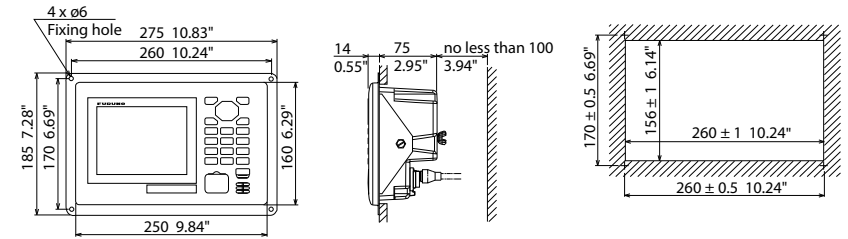

GP1871F

Display Unit (Bracket Mount)
Display Unit (Flush mount)


1.1 kg 2.4 lb
0.9 kg 2.0 lb

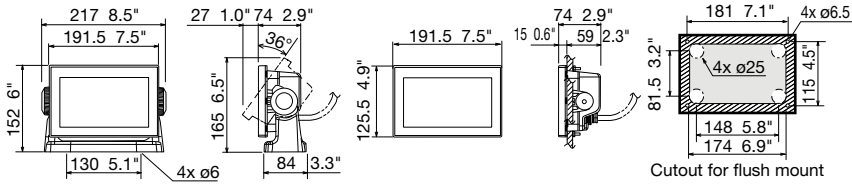

GP1971F

Display Unit (Bracket Mount)
Display Unit (Flush mount)


1.5 kg 3.3 lb
1.3 kg 2.9 lb

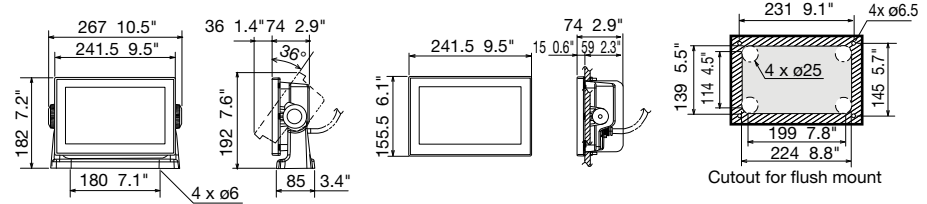

GP3700/3700F


Display Unit (Bracket Mount)

4.8 kg 10.6 lb

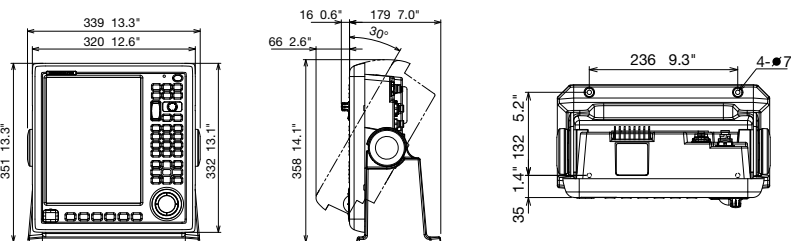

DGPS Antenna

GPA021S 0.52 kg 1.15 lb



5.7" Fish Finder		8.4" Fish Finder		10.4" LCD Fish Finder		12.1" LCD Fish Finder			
MODEL		FCV600		FCV800		FCV295		FCV1150	
GENERAL									
Frequency		50/200 kHz or 40 - 225 kHz		50/200 kHz and 40 - 225 kHz		The synthesized transducer works with frequencies in 28 to 200 kHz			
Transducer		300 W / 600 W		300 W/1 kW* / 600 W/1kW*		1, 2 or 3 kW			
DISPLAY									
Type		5.7" TFT color LCD		8.4" TFT color LCD		10.4" TFT color LCD		12.1" TFT color LCD	
Screen Resolution		VGA 480 x 640 pixels		SVGA 600 x 800 pixels		640 x 480		800 x 600	
Display Mode		Single frequency (50 or 200 kHz), TruEcho CHIRP™: 40kHz to 240 kHz Dual-frequency, Zoom, Nav data, A-scope, Marker zoom, Bottom zoom, Bottom-lock, Bottom Discrimination, ACCU-FISH™, RezBoost™				Single mode (high/low frequency), Dual-frequency, Zoom, Mix, A-scope, Marker zoom, Bottom zoom, Bottom-lock expansion			
Display Range *m, ft, fa, p/b can be selectable in the menu		2-1200 m				5-3000 m			
Range Shift		up to 1200 m				0-2000 m			
Zoom Range	Bottom-lock expansion	2-10 m				5-200 m			
	Bottom & Marker Zoom	2-1200 m							
Picture Advance Speed		8 steps: stop, 1/16, 1/8, 1/4, 1/2, x1, x2, x4, x8				6 steps: stop, 1/16, 1/8, 1/4, 1/2, x1, x2, x4			
Pulselength & TX rate		0.04-3.0 ms, Max 3,000 pulse/min				0.1-5.0 ms, 20-3000 pulse/min			
NMEA2000	Input	059392, 059904, 060160, 060416, 060928, 061184, 065240, 065280, 126208, 126720, 126996, 127250, 127252, 127257, 128259, 129025, 129026, 129029, 129283, 129284, 130306, 130310, 130311, 130312, 130314, 130316, 130577, 130821							
	Output	059392, 059904, 060928, 061184, 126208, 126464, 126720, 126993, 126996, 126998, 128259, 128267, 130310, 130312, 130316, 130821, 130822, 130830, 130831, 130832							
Interface (IEC61162-1, NMEA 0183 Ver 1.0/2.0/3.0)	Input	BWC, GGA, GLL, GNS, HDG, HDT, MDA, MTW, MWV, RMA, RMB, RMC, THS, VHW, VTG, XTE, ZDA				BWC, GGA, GLC, GLL, GNS, GTD, HDG, HDT, MDA, MTW, MWW, RMA, RMB, RMC, VHW, VTG, XTE		BWC, GGA, GLC, GLL, GNS, GTD, HDG, HDT, MDA, MTW, MWW, RMA, RMB, RMC, VHW, VTG, XTE, HVE, att, hve, req	
	Output	DBS, DBT, DPT, MTW*, RMB*, VHW*, TLL* by key operation * External data required.				DBS, DBT, DPT, MTW*, TLL**, BHR***, SDmrk, VHW, RMB, dat *Optional sensor required **External data required ***requires CA50/200-1T or CA50/200-12M transducer			
ENVIRONMENT									
Temperature		-15° C to +55° C							
Waterproofing		IP56				IP55 (When flush mounted)			
POWER SUPPLY									
		12-24 VDC: 1.0-0.6 A		12-24 VDC: 1.6-0.8 A		12-24 VDC: 2.6-1.3 A, 100/110/220/230 VAC, optional rectifier required		12-24 VDC: 3.3-1.7 A, 100/110/220/230 VAC, optional rectifier required	


Drawings

Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

FCV600


Display Unit
(Bracket Mount)

1.3 kg 2.9 lb

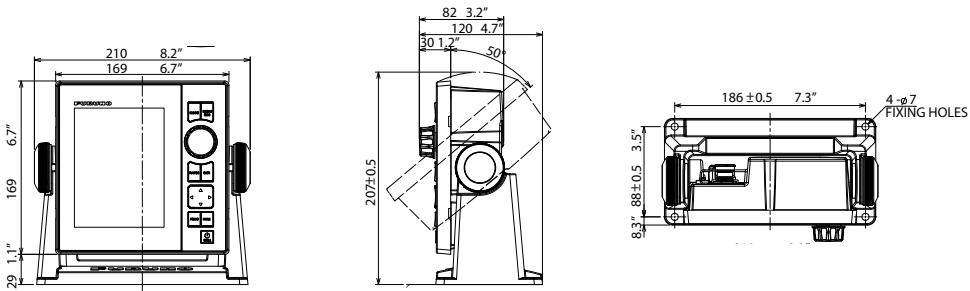

Display Unit
(Flush Mount)


1.1 kg 2.4 lb

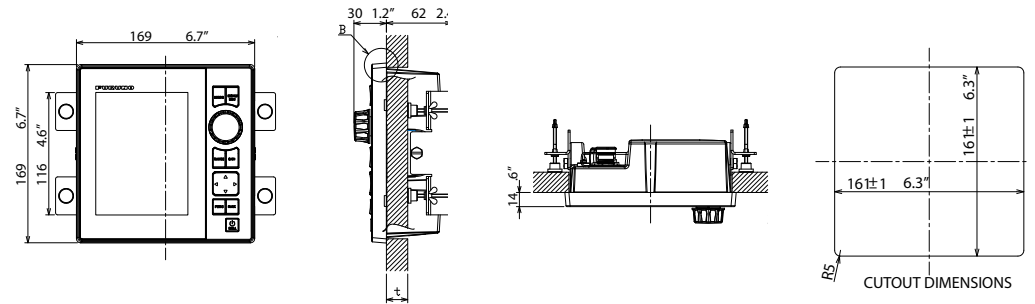

FCV800


Display Unit
(Bracket Mount)

2.4 kg 5.3 lb

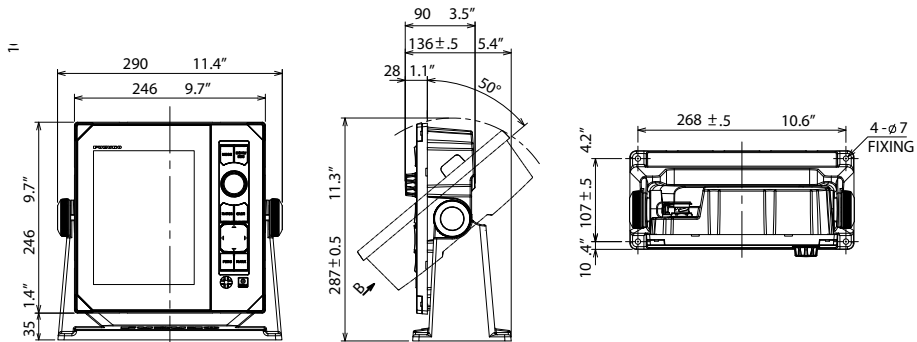

Display Unit
(Flush Mount)


1.9 kg 4.2 lb

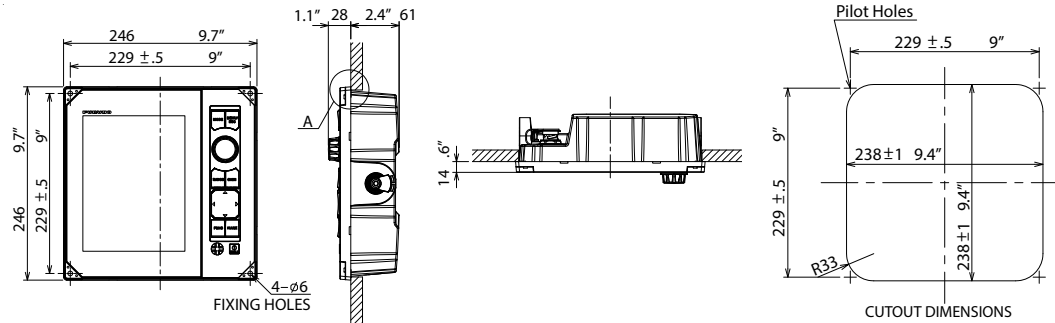

FCV295

Display Unit
(Flush Mount)


7.0 kg 15.4 lb

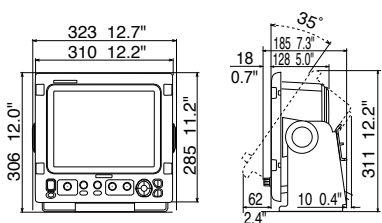

FCV1150


Display Unit
(Bracket Mount)

8.2 kg 18.1 lb

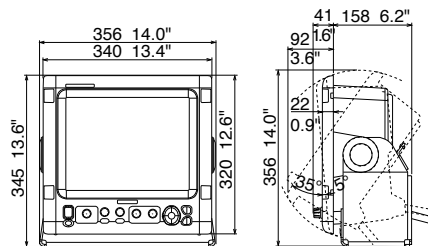

Display Unit
(Flush Mount)

6.8 kg 15 lb

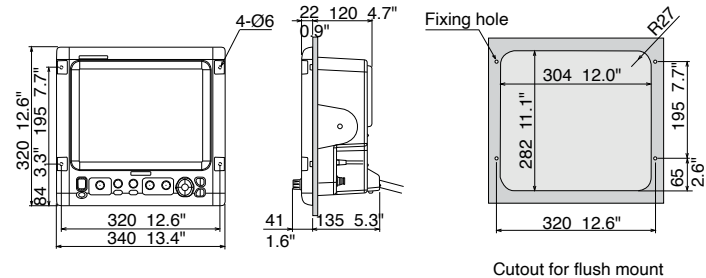

Fish Finder		Hi-Resolution TruEcho CHIRP™ Fish Finder	TruEcho CHIRP™ with unique Fish Size Indicator
MODEL		FCV1900	FCV1900B
GENERAL		FCV1900G	
Frequency	The synthesized transducer works with frequencies in 15 to 200 kHz		
Transducer	1, 2 or 3 kW		
DISPLAY (Processor unit)			
Display mode	Single frequency high/low, Dual-frequency, Zoom, User 1/2 (available to use mixture, multi-gain, telesounder and external sounder display), Bottom-lock expansion, Bottom zoom, Marker zoom, Discrimination zoom		
Display Range *m, ft, fa, p/b can be selectable in the menu	5 to 3000 m		
Range Shift	up to 2000 m		
Zoom Range	2 to 200 m		
Fish size histogram	-	-	2 m depth or more, specified transducer required
Picture Advance Speed	6 steps: stop, 1/4, 1/2, 1/1, 2/1, 4/1		
Data recording	Echo display and measured data can be recorded to internal memory		
Language	English, Danish, French, Spanish, Norwegian, Russian, Chinese, Korean, Japanese		
INTERFACE			
NMEA0183	3 Ports for Input/Output		
Interface	Input	GGA, GLL, GNS, MTW, VHW, VTG, ZDA	
(NMEA0183 Ver 1.5/2.0/3.0)	Output	DBS, DBT, DPT, MTW, TLL	
LAN	1 port*, Ethernet 100Base-TX *Hub required		
CIF	1 port		
Net sonde	1 port (sonde marker/sonde KP)		
Video	1 port, HDMI type-D		
External KP	1 port		
Temperature sensor	1 port		
USB	1 port (USB2.0)		
ENVIRONMENT			
Temperature	-15° C to +55° C		
Waterproofing	IP22		
POWER SUPPLY			
12-24 VDC: 8.3-3.9 A			


Drawings

Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

FCV1900


Processor Unit FCV1901

10.2 kg 22.5 lb

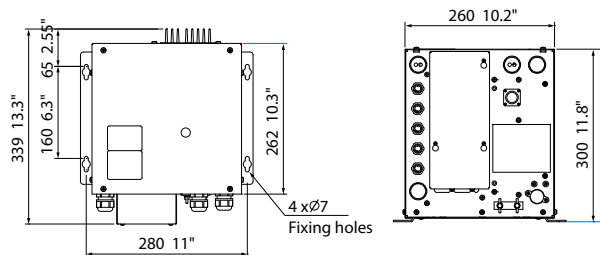

Control Unit FCV1902

1.1 kg 2.4 lb

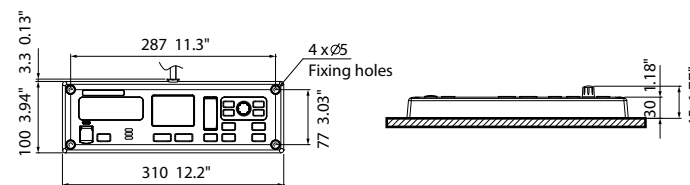

TRANSDUCER LIST						STAND ALONE			
Sensor Type	Frequency	Type	Matching Box Required	Mount	Power Rating	FCV800	FVC600	GP1871F/1971F	BBDS1
TRANSDUCER	50/200 kHz	520-5PSD	-	Thru-hull	600 W	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		525-5PWD	-	Transom		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		520-5MSD	-	Thru-hull		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		520-PLD (P319*)	-	Thru-hull		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
		525T-BSD (B45*)	-	Thru-hull		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		525T-PWD (P66* without speed sensor)	-	Transom		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		525T-LTD/12 (B60-12*)	-	Thru-hull		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
		525T-LTD/20 (B60-20*)	-	Thru-hull		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
		SS60-SLTD/12 (SS60-12*)	-	Thru-hull		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
		SS60-SLTD/20 (SS6-20*)	-	Thru-hull		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
	CA50/200-1T	<input checked="" type="checkbox"/>	Thru-hull	1 kW	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	526T(ID)-HDD (B260*)	-	Thru-hull		-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	50 kHz	CA50B-6	<input checked="" type="checkbox"/>	Thru-hull	1 kW	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-
		CA50B-6B	<input checked="" type="checkbox"/>	Thru-hull		-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-
CA50B-9B		<input checked="" type="checkbox"/>	Thru-hull	-		-	-	-	
200 kHz	CA200B-5	<input checked="" type="checkbox"/>	Thru-hull	1 kW	-	-	-	-	
	CA200B-5S	<input checked="" type="checkbox"/>	Thru-hull		-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-	
TRIDUCER	50/200 kHz	525ST(ID)-MSD (B744V*)	-	Thru-hull	600 W	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		525ST(ID)-PWD (P66*)	-	Transom		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

LEGEND: Matching Box Required ACCU-FISH™ Bottom Discrimination Mode

*Airmar® Model Name

TRANSDUCERS for FCV295/FCV1150/FCV1900/DFF3/DFF3-UHD			
Output	1 kW	2 kW	3 kW
28 kHz	CA28F-8	CA28BL-6HR	CA28BL-12HR
38 kHz	—	CA38BL-9HR	CA38BL-15HR
50 kHz	CA50B-6/6B, CA50B-9B	CA50B-12, CA50BL-12HR	CA50BL-24H, CA50BL-24HR
68 kHz	CA68F-8H	—	CA68F-30H
82 kHz	—	CA82B-35R	—
88 kHz	CA88B-8	CA88B-10	CA88F-126H
107 kHz	—	—	CA100B-10R
150 kHz	—	—	CA150B-12H
200 kHz	CA200B-5S	CA200B-8/8B	CA200B-12H
50/200 kHz	CA50/200-1T*, CA50/200-1ST**	—	—

* ACCU-FISH™ compatible for FCV1900/DFF3 ** Except for FCV-1900

TRANSDUCERS for FCV1900B/1900G (CHIRP)			
Output	1 kW	2 kW	2 kW/3 kW
42 to 65 kHz (low)/130 to 210 kHz (high)	CM265LH *	—	—
42 to 65 kHz (low)/85 to 135 kHz (high)	CM265LM	—	—
42 to 65 kHz (low)/150 to 250 kHz (high)	CM275LHW **	—	—
38 to 75 kHz (low)/130 to 210 kHz (high)	—	PM111LH *	—
38 to 75 kHz (low)/80 to 130 kHz (high)	—	PM111LM	—
28 to 60 kHz (low)/130 to 210 kHz (high)	—	—	CM599LH *
28 to 60 kHz (low)/80 to 130 kHz (high)	—	—	CM599LM

* ACCU-FISH™ and fish size histogram compatible.

** Wide beam type transducer with high frequency beam width of 25°

TRANSDUCERS for DFF1-UHD (CHIRP)	
Output	1 kW
42 to 65 kHz (low)/130 to 210 kHz (high)	CM265LH, CM275LHW, B265LH, B275LHW (Airmar®)

TRANSDUCER for DFF3D (Multibeam)	
Output	800 W
165 kHz	165T-B54 Through Hull with Motion Sensor
165 kHz	165T-TM54 Transom Mount with Motion Sensor
165 kHz	165T-CM54 Pocket or Keel Mount with Motion Sensor
165 kHz	165T-SS54 Stainless Steel Through Hull with Motion Sensor
165 kHz,	165T-50/200-TM260 Transom Mount Combo
165 kHz,	165T-50/200-SS260 Stainless Steel Through Hull Combo
165 kHz,	165T/265LH-PM488 Pocket Mount Combo
165 kHz,	165T/275LHW Pocket Mount Combo Wide Beam
165 kHz,	165T-PM542LM Pocket Mount Combo
165 kHz,	165T-PM542LHW Pocket Mount Combo

TRANSDUCERS for DFF3D & BBDS1/DFF3D & DFF1-UHD (COMBINATION)	
Output	1 kW
165 kHz and 50/200 kHz Multibeam and Conventional	165T-50/200-SS260 (Thru-hull) 165T-50/200-TM260 (Transom)
165 kHz and 42 to 65 kHz (low)/130 to 210 kHz (high) Multibeam and CHIRP	165T/265LHPM488 (Pocket)

TRANSDUCERS for GP1871F/1971F (CHIRP)			
Output	300 W	600 W	1 kW
40 to 60 kHz (Low)	—	—	B175L
40 to 75 kHz (Low)	B75L/SS75L	—	—
80 to 130 kHz (Medium)	—	B75M/SS75M	—
95 to 155 kHz (Medium)	B150M/TM150M	—	—
130 to 210 kHz (High)	—	B75H/SS75H	B175H
150 to 250 kHz (High)	—	—	—

12.1" Searchlight Sonar

12.1" Dual Frequency Searchlight Sonar

MODEL		CH500	CH600
GENERAL			
Frequency		60/88/150/180/240 kHz, 1 frequency selectable	60/153 kHz or 85/215 kHz (dual frequency) selectable
Output Power		0.8-1.5 kW (depending on frequency), power reduction function available	1 kW
DISPLAY			
Type		12.1" color LCD, User-Supply (BB version)	
Screen Resolution		XGA 1024 x 768	
Brightness		0.5 to 950 cd/m2 selectable	
Display Mode		Horizontal (Normal/Zoomed/Vertical or History combined/Split horizontal + Vertical/A-Scope combined), Vertical Scan, Echo Sounder (Normal/A-Scope combined), Full-circle A-Scope (Normal/Horizontal dual), Horizontal (Normal/Zoomed/Vertical or History combined/Split horizontal + Vertical/A-Scope combined), Vertical Scan, Echo Sounder (Normal/A-Scope combined), Full-circle A-Scope (Normal/Horizontal dual), Dual horizontal (Normal/Zoomed/Vertical/Echo sounder, High low or mixed frequency mode selected from control unit)	
Display Range	Horizontal mode	10 to 2400 m, 15 steps selectable	
	Vertical mode	10 to 600 m, 15 steps selectable	
Pulselength		0.2 to 20 ms (depending on range scale)	
Audio Monitor	Output	2 W (8 ohms)	
	Frequency	Frequency 0.9 to 1.2 kHz (external speaker required)	
Language		English, Thai, Vietnamese, Chinese, Spanish, Indonesian, Malay, Burmese, French, Norwegian, Italian, Japanese	
INTERFACE			
NMEA0183		2 Ports, v1.5/2.0/3.0/4.0/4.1, 4800/9600/19200/38400 bps	
Interface	Input	CUR, DBS, DBT, DPT, GGA, GLL, GNS, HDG, HDM, HDT, MDA, MTW, RMC, VHW, VTG, ZDA	
	Output	TLL	
NMEA2000		1 Port	
Interface	Input	059392/904, 060160/416/928, 061184, 065240, 126208/720/992/996, 127250, 128259/267, 129025/026/029/033/291, 130310/311/312/316/577/821	
	Output	059392/904, 060928, 061184, 126208/464/720, 126993/996/998, 130822/823/828	
Video Signal Output		1 port, HDMI, XGA	
External KP		1 port, I/O	
Output proprietary sentence		PFEC: pidat	
HULL UNIT			
Transducer travel		400 mm or 250 mm	
Raising/Lowering Time		400 mm: 30 s, 250 mm: 20 s	
Allowable Ship's Speed		20 kn or less (15 kn during raise/lower operation)	
Horizontal Mode Control	Scanning Angle	6° to 360°, 24° step (6°, 12°, 15°, 18°, 21°, 24°)	
	Tilt Angle	5° to +90° (vertical), 1° step	
Vertical Fan Mode Control	Scanning Angle	6° to 180°, 12° step (Normal: 3°, High speed: 6°)	
Transceiver Beam Width	Horizontal (-3 dB/-6 dB)	60 kHz: 15°/20°, 88 kHz: 12°/16°, 150 kHz: 7°/9° 180 kHz: 7°/9°, 240 kHz: 6°/8°	60 kHz: 16°/22°, 153 kHz: 7°/9° 85 kHz: 11°/15°, 215 kHz: 5°/6°
	Vertical (-3 dB/-6 dB)	60 kHz: 12°/17°, 88 kHz: 10°/13°, 150 kHz: 7°/9° 180 kHz: 8°/10°, 240 kHz: 6°/8°	60 kHz: 14°/20°, 153 kHz: 5°/8° 85 kHz: 10°/14°, 215 kHz: 4°/6°
Stabilizer		Built-in motion sensor	
ENVIRONMENT			
Temperature	Display/Control/Transceiver unit	-15° C to +55° C	
	Hull unit	0° C to +55° C (Transducer: 0° C to +35° C)	
Waterproofing	Display/Control unit	IP55	
	Transceiver/Hull unit	IP22 (Raise/lower control unit: IP55)	
POWER SUPPLY			
Display/Control/Transceiver Unit		12-24 VDC: 4.5-2.2 A	
Hull Unit		12/24 VDC: 2.2/1.1 A (7.2/3.6 A: during raising)	


Full-Circle Scanning Sonar

MODEL	CSH5LMK2	CSH8LMK2
GENERAL		
Frequency	55 kHz or 68 kHz	85 kHz
DISPLAY		
Display Mode	Single scan, Fish Finder combination* (single and Fish Finder), Audio combination (single and audio pictures) * Fish Finder or Echo sounder required	
Colors	Scan/Echo: 16 colors, Mark: 1 color	
Mark	Own ship's track, Heading line, Direction/distance, Fish school, Event, Target lock	
Range Scale	50, 85, 100, 150, 200, 250, 300, 350, 400, 450, 500, 600, 800, 1000, 1200, 1600 m	
Pulselength	0.5 to 20 ms (depending on range scales)	
Ship Speed	18 kn max (raise/lower operation up to 16 kn)	
Tilt	Manual control: 0° to 55° in 1° steps Automatic tilt scan: 4° to 52°	
Audio Search (By external loudspeaker)	Frequency 800 Hz	Sector 1 kHz
Language	20°, 40°, 80°, and 120° selectable	
Language	English, Spanish, Danish, Dutch, French, Italian, Norwegian, Thai, Vietnamese, Burmese, Indonesian, Japanese	
INTERFACE		
NMEA0183 (Ver1.5/2.0/2.2)	2 ports	
Interface	Input	CUR, DBS, DBT, DPT, GGA*, GLC, GLL*, GTD, HDG, HDM, HDT, MTW, RMA, RMC, VDR, VHW, VTG * disabled for NMEA0183 Ver.1.5
	Output	TLL (external data required)
Log, E/S, KP	Speed log pulse (contact signal): 200/400 pulse/NM Sonde, E/S signal: VI-1100A applicable External KP: Current loop, 0 to 12 V	
Video Signal Output	Method	RGB analog, separated synchronization, XGA (VESA)
	Resolution	1024 x 768 pixels, 65 MHz clock
CIF data input	Location, Ship's speed, Bearing, Current data (1 layer), Water depth, Water temperature, Multiple layer current data	
HULL UNIT		
Transducer travel	400 mm or 600 mm	
Raising/lowering Time	400 mm: 14 s, 600 mm: 20 s	
Allowable Ship's Speed	18 kn max. (16 kn during raise/lower operation)	
Driving system	Remote electric control	
ENVIRONMENT		
Temperature	0° C to +55° C	
Waterproofing	IPX2 (w/o connector panel of processor unit)	
POWER SUPPLY		
Processor unit	100-240 VAC: 4.0-2.0 A, 1 phase, 50-60 Hz	100-240 VAC: 4.5-2.2 A, 1 phase, 50-60 Hz


WASSP Multibeam Sonar

MODEL	S3, S3PR, F3/160, F3X/160, F3X/80, W3, W3PI
GENERAL	
Transmission Frequency	S3, F3, and F3X: 160 kHz, 90-190 kHz/F3XL: 80 kHz/W3: 90-190 kHz
Effective Beam Width	F3/F3X: 200 m, F3XL: 450 m
Beam Spacing	FA: 3.2°
Beam Width	120° x 4° (Athwartships x Fore-aft), PS: 4.4°
Maximum Depth* (best performance)	F3/F3X: 200 m (Side Beam), 400 m (Main Beam directly under boat) F3XL: 450 m (Side Beam), 900 m (Main Beam directly under boat) * Depth capability subject to a variety of external factors
Max Range Resolution	2 cm
Tide Correction	Fully Geo Referenced
DISPLAY	
Display Mode	Bathymetry, Sonar polar view, Sounder (single, triple & quint beam) (Licensing options) Backscatter, Open Client Support, Water Column Targets, Uncorrected Data, XYZ export, Sidescan, RTK tides, other export formats
MINIMUM PC SPECS	
OS	Windows 8.1, 10
CPU	2 Ghz, 4 Cores/4 Threads
Memory	8 GB (Min. 4 GB)
Graphics	Direct X11
Screen Resolution	Full HD 1920 x 1080 (Min. XGA 1024 x 768)
SSD	2 TB (Min. 250 GB)
Network	Ethernet - GbE, WiFi802.11ac
Dual Screen Support	YES
INTERFACE (Transceiver Unit)	
NMEA0183/RS422/RS232	GGA, GKG, GLL, HDG, HDM, HDT, HVE, PASHR, PTNL PFEC, RMC, RCD, TSS1, ZDA
Ethernet	GbE
Other Interfaces	PPS, KP, Remote Power
ENVIRONMENT	
Temperature	0° C to +50° C (storage: -200° C to +85° C)
Waterproofing	IP56, Bulkhead mounted (IP67 option available)
POWER SUPPLY	
	9-32 VDC

W3PI Assembly

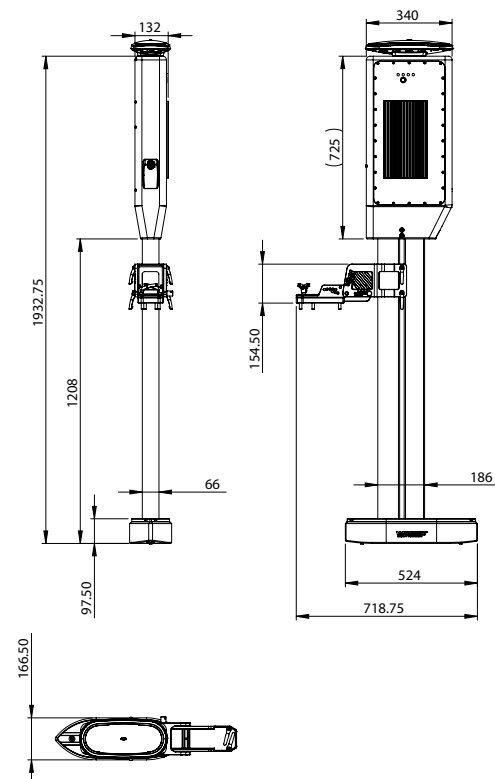


W3PI Bracket

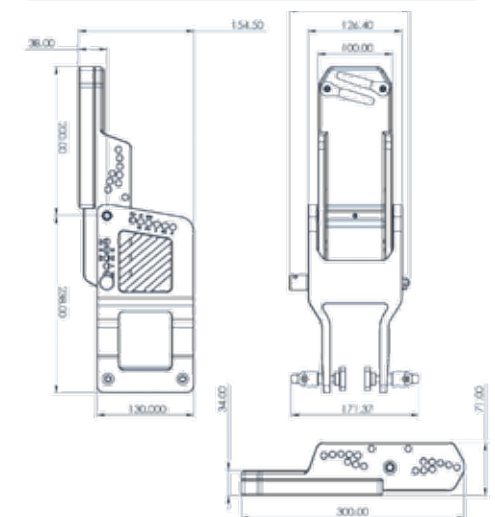


Drawings Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

S3 / S3PR / F3/160 / F3X/160 / F3X/80 / W3 / W3PI


Transducer
(G3: 160 kHz) WMB160 15 kg 33.1 lb (cable dependent)

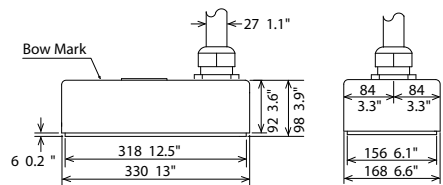

Transducer
(G3: 80 kHz) WMB80 39 kg 86.0 lb (cable dependent)

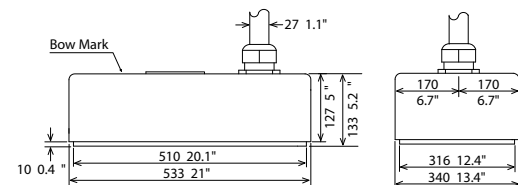


Transceiver Unit DRS (F3 DRX) 8.3 kg 18.3 lb

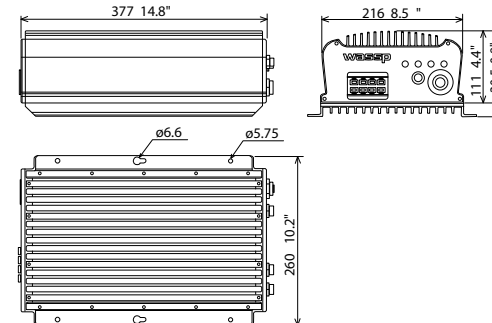

CH500/CH600


6" Type Hull Unit (250mm travel)
CH505 (180 kHz) 33 kg 73 lb

8" Type Hull Unit (250mm travel)
CH505 40 kg 88 lb

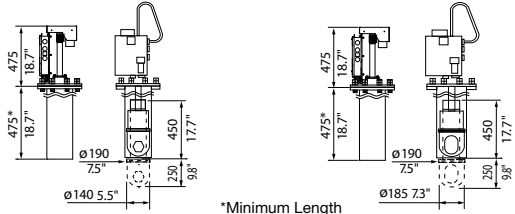

*Minimum Length

Display/Control Unit 4.0 kg 9.0 lb




Control Unit CH502/602 1.0 kg 2.2 lb




6" Type Hull Unit (400mm travel)
CH504 34 kg 75 lb

8" Type Hull Unit (400mm travel)
CH504 41 kg 90 lb

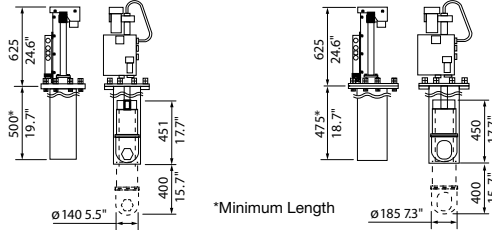

*Minimum Length

Transceiver Unit CH503 3.3 kg 7.2 lb





CSH5LMK2/CSH8LMK2

Hull Unit (400mm travel) CSH5041A
Hull Unit (600 mm travel) CSH5040A

70 kg 154 lb
75 kg 165 lb


Hull Unit (400mm travel) CSH8041A
Hull Unit (600 mm travel) CSH8040A

81 kg 178 lb
82 kg 180.8 lb

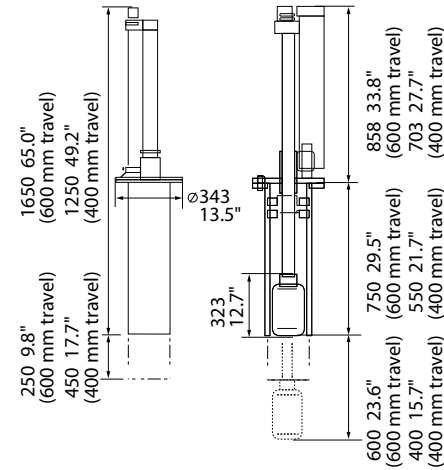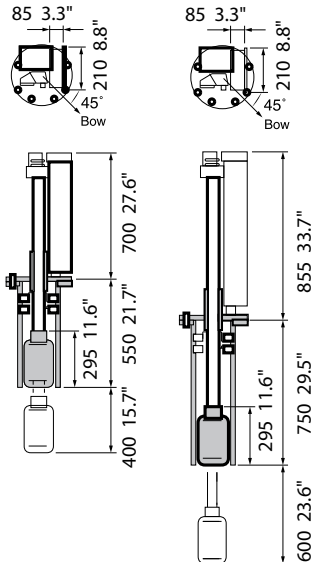


Processor Unit
CSH5210A

3.4 kg 7.5 lb




Transceiver Unit
CSH5130A5L

20 kg 44.1 lb




Transceiver Unit
CSH8030A8L

37 kg 81.6 lb




Control Unit
CSH5211A

3.5 kg 7.7 lb



Preamplifier
CSH5020A

6.5 kg 14.3 lb



Autopilot

NAVpilot 300


MODEL	NAVpilot 300	
CONTROL UNIT		
Type	Color LCD	
Screen Size	4.1"	
Effective Display Area	82.6 (W) x 61.9 (H) mm	
Screen Resolution	320 x 240 dots (QVGA)	
Screen Brightness	700 cd/m2 typical	
Screen Contrast	8 steps	
PROCESSOR UNIT		
Steering Mode	STBY, Auto, Dodge, NFU (Non-follow up), Turn, Advanced auto*, SABIKI™, Navigation*, FishHunter™, Override * external data required	
Rudder Gain/Counter Rudder Settings	Auto / 1-20 (Manual)	
Trim Adjustment	-5°(port) to +5°(stbd)	
Course Change Speed	1 to 20 deg/s	
Alarm	Deviation alarm, Watch alarm	
Motor	10 A continuous, 20 A for 5 seconds	
GESTURE CONTROLLER		
Screen Type	1.28" monochrome TFT LCD, 128 x 128	
Communication Distance	10 m wide view (depending on environmental conditions) - Bluetooth	
Source	3 VDC, Dry cell battery (AAA, 2 pcs)	
INTERFACE		
NMEA2000	1 Port	
Input	059392, 059904, 060160, 060416, 060928, 061184, 065240, 065283, 065284, 126208, 126464, 126720, 126992, 126996, 127250, 127258, 128259, 129025, 129026, 129029, 129283, 129284, 129285, 129538, 130577, 130818, 130821, 130827, 130841	
Output	059392, 059904, 060928, 061184, 126208, 126464, 126720, 126993, 126996, 126998, 127237, 127245, 130816, 130821, 130822, 130823, 130827, 130841	
Control	1 Port, DBW control	
Contact Signal	3 Ports	
ENVIRONMENT		
Temperature	-15° C to +55° C	
Waterproofing	Processor Unit	IP55
	Control Unit	IP56
	Gesture Controller	IP67
POWER SUPPLY		
Processor Unit NMEA2000	12-24 VDC, 0.22 A max. (LEN 2)	
Processor Unit Non-NMEA2000	LEN 2	
Control Unit	15 VDC, 0.29 A max. (LEN 6)	
FISHHUNTER™ DRIVE		
Engine	Suzuki Outboards	
Autopilot	Supported Qty.	
Display Device	NavNet TZtouchXL series – TZT10X/13X/16X/22X/24X – NavNet TZtouch3 series – TZT9F/12F/16F/19F ver. 1.08, NavNet TZtouch2 series – TZTL12F/L15F/2BB ver. 6.21, GP-1871F/1971F – ver. 1.0, SMD series – SMD7/9 ver. 1.0, SMD12/16 ver. 5.15 For active route output to SUZUKI engines, autopilot mode display, etc.	
Navigation Data	Heading, position, and vessel speed sensors for autopilot control (MFD internal GPS does not meet all requirements, SCX-20 recommended)	

Drawings Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

NAVpilot-300


Control Unit FAP3011 (Flush Mount)

0.22 kg 0.48 lb

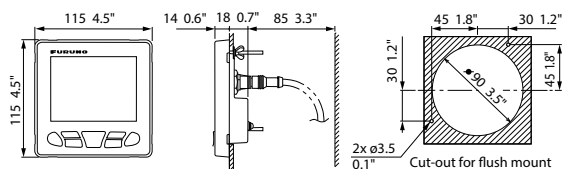


Processor Unit FAP7002

1.5 kg 3.3 lb




Control Unit FAP3011 (Bracket Mount)

0.43 kg 0.95 lb

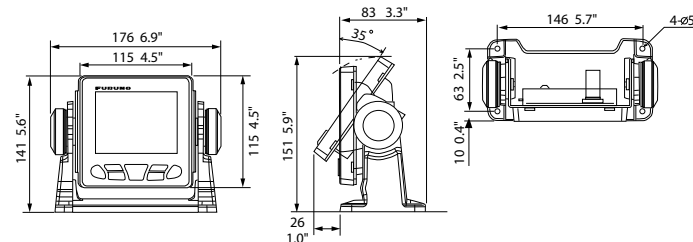

Gesture Controller GC001 0.12 kg 0.26 lb



Autopilot

NAVpilot 711C

MODEL		NAVpilot 711C	
CONTROL UNIT			
Type	Color LCD		
Screen Size	4.1"		
Effective Display Area	82.6 (W) x 61.9 (H) mm		
Screen Resolution	320 x 240 dots		
Screen Backlight	8 steps		
PROCESSOR UNIT			
Steering mode	STBY, Auto, Dodge (FU, NFU, Course), Turn, Remote, Advanced auto*, SABIKI™**, Navigation*, Wind*, FishHunter™** * external data required. ** NAVpilot-711C only.		
Sea Condition Adjustment	Auto/Manual-Calm/Moderate/Rough		
Rudder Angle Settings	10 - 45 deg		
Alarm	Heading deviation, Cross-track error*, Ship's speed*, Depth*, Water temperature*, Wind*, Watch, Log trip* * external data required		
INTERFACE			
Ports	NMEA2000: 1, NMEA0183: 2		
Input	NMEA0183	AAM, APB, BOD, BWC, BWR, DBT, DPT, GGA, GLL, GNS, HDG, HDM, HDT, MTW, MWV, ROT, RMB, RMC, THS, TLL, VHW, VTG, VWR, VWT, XTE, ZDA	
	NMEA2000	059392/904, 060928, 061184, 126208/720/992/996, 127250/251/258/488/489, 128259/267, 129025/026/029/033/283/284/285, 130306/310/311/312/313/314/577/818/821/827/880	
Output	NMEA0183	DBT, DPT, GGA, GLL, GNS, HDG, HDM, HDT, MTW, MWV, RMB, RMC, ROT, RSA, VHW, VTG, VWR, VWT, ZDA	
	NMEA2000	059392/904, 060928, 061184, 126208/464/720/992/996, 127237/245/250/251/258, 128259/267, 129025/026/029/033/283/284/285, 130306/310/311/312/822/823/827	
ENVIRONMENT			
Temperature	-15° C to +55° C		
Waterproofing	Processor unit	IP20	
	Other unit	IP56	
POWER SUPPLY			
Non-NMEA2000	12-24 VDC: 4.0 - 2.0 A (excluding pump)		
NMEA2000	LEN 1		

NAVpilot 711C





Control Unit FAP7011C (Table Mount)

0.39 kg 0.9 lb

Control Unit FAP7011C (Surface Mount)

0.33 kg 0.7 lb

Processor Unit FAP7002 1.9 kg 4.2 lb

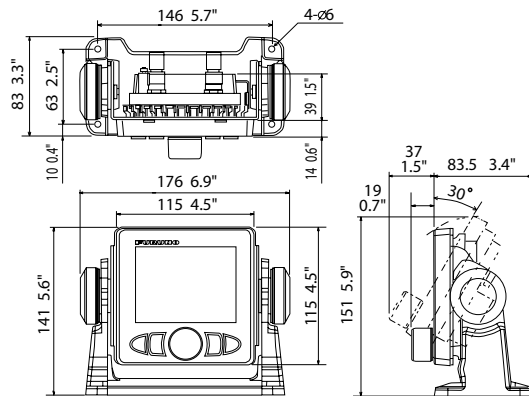

Instrument/Data Organizers

MODEL	FI70
GENERAL	
Type	4.1" Color LCD
Screen Resolution	QVGA (320 x 240)
Brightness	Typical 700 cd/m2
Display Mode	Analog meter, Graph, Highway, Race timer, Simple AIS, Data box
Language	English, French, Spanish, German, Italian, Portuguese, Swedish, Danish, Norwegian, Finnish
DISPLAY DATA	
Speed	STW, Max STW, Average STW, SOG, Max SOG, Average SOG, Velocity made good (VMG)
Wind	AWS, TWS, Max TWS, AWA, TWA, Beaufort wind GWD
Heading	HDG, Average HDG, Heading on next tack, ROT
Course	COG
Timer	Count down timer 1, Count down timer 2, Count up timer
Navigation	Bearing, RNG, WPT, XTE, Position, ETA time, ETA date, Trip, Odometer
Boat	Rudder angle, Trim tabs, Roll/Pitch
Engine	Engine RPM, Trip fuel used, Fuel rate, Engine trim/tilt, Boost pressure, Engine temperature, Engine hour, Oil pressure, Oil temperature, Coolant pressure, Engine load, Transmission oil temperature, Transmission oil pressure
Tank	Tank level 1-6
Depth	Depth
AIS	AIS
Voltage	Supply voltage
Environment	Date, Time, Water temperature, Air temperature, Atmospheric pressure, Humidity, Wind chill temperature, Dew point
INTERFACE	
NMEA2000	1 port
Input	059904, 165280, 060928, 061184, 126208/720/992/996, 127237/245/250/251/257/258/488/489/493/497/505, 128259/267, 129025/026/029/033/038/039/040/283/284/285/538/794/809/810, 130306/310/311/312/313/314/316/576/577, 130816/818/821/822/825/880/841
Output	059392/904, 060928, 061184, 126208/464/720/993/996, 816/821/8 22/823/825/841
ENVIRONMENT	
Temperature	-15° C to +55° C
Waterproofing	IP56
POWER SUPPLY	
15 VDC through NMEA2000 0.15 A max., LEN4	

Drawings


Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

FI70

Control Unit

0.22 kg 0.48 lb

Front Mount (optional installation kit required)

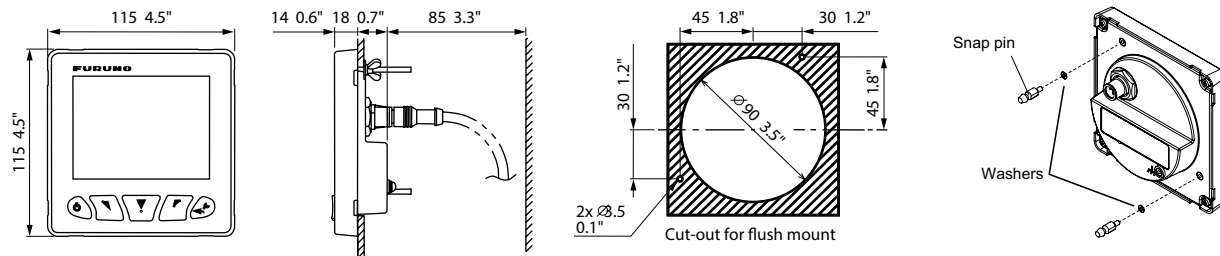


Electronic Navigation Instruments


	FI5001 Wind Transducer	FI5001L (Long Shaft) Wind Transducer	DST810 Depth/Speed/Temp sensor	FI5002 Junction Box	IFNMEA-FI Analog NMEA Data Converter
GENERAL					
Info:	Power supply: 12 VDC, less than 40 mA Transducer cable: 30/50 m		Frequency: 235 kHz Cable: 6 m	NMEA2000 backbone x 2 ports NMEA2000 x 6 ports Power supply: 12 VDC, less than 2 A	NMEA2000: 1 port External Sensor: Tank gauge, Wind transducer (FI-5001 or FI-5001L) Speed/Temperature sensor (ST-02PSB or ST-02MSB) Power supply: 15 VDC, less than 200 mA

FI5001

Wind Transducer FI5001 (option) 0.3 kg 0.7 lb

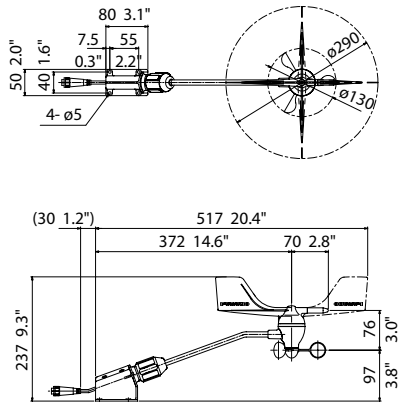


Wind Transducer FI5001L Long Shaft (option) 0.4 kg 0.9 lb

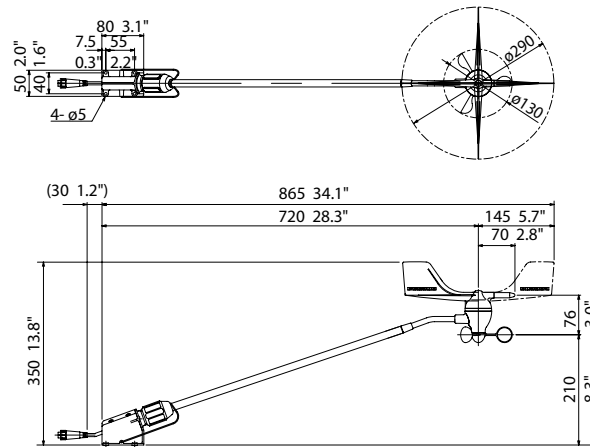


FI5002

Junction Box FI5002 (option) 0.3 kg 0.7 lb

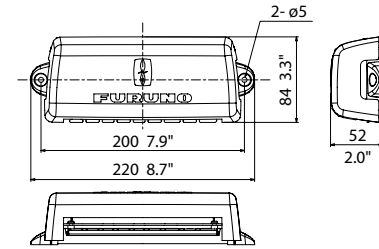


DST810

Depth/Speed/Temp Sensor (option) 0.9 kg 2.0 lb



IFNMEA-FI

Analog NMEA Data Converter (option) 0.3 kg 0.7 lb

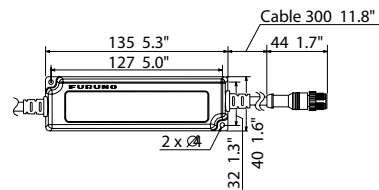


	15" Marine Display MU152HD	19" Marine Display MU192HD	27" Marine Display MU270W
MODEL			
DISPLAY CHARACTERISTICS			
Type		19 inches, landscape	27 inches, landscape
Screen Resolution		SXGA (1280 x 1024)	WUXGA (1920 x 1200)
Contrast Ratio (typical)	900: 1	900: 1	1,500: 1
Viewing Angle (typical)			left/right and up/down: 85°
Max Brightness (typical)	1000 cd/m2	1,000 cd/m2	400 cd/m2
Min Brightness (typical)		0.2 cd/m2 or less	
INTERFACE			
Analog RGB (D-SUB/15 pins)			1 port
DVI (DVI-D)		1 port	1 port
Composite Video (NTSC/PAL)		1 port	1 port
Built-in Scaler		1 port (for dimmer control)	SVGA to WUXGA
POWER SUPPLY			
	12-24 VDC, 1.9-0.9 A	12-24 VDC (10.8-31.2 V): 4.9-2.3 A	
ENVIRONMENT (IEC 60945 test method)			
Temperature			
Waterproofing			
EQUIPMENT LIST			
Standard			
Option			<ol style="list-style-type: none"> 1. Cable Assembly and Bracket Assembly 2. Hood Assembly (front/rear) 3. Flush Mount Assembly (rear) 4. Dust Cover 5. Handgrip and Crimping Tool Assembly

Drawings Refer to Online manual for more details. For illustration purposes only; not drawn to scale.


MU152HD

Flush Mount 4.9 kg 10.8 lb

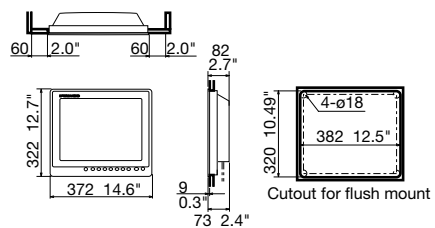


MU192HD

Flush Mount 12.8 kg 28.2 lb

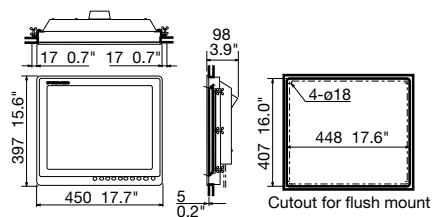


MU270W


Bracket Mount 21.0 kg 46.3 lb

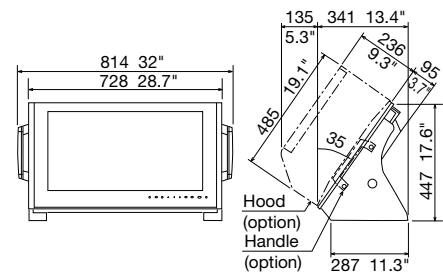


Bracket Mount 6.9 kg 15.2 lb

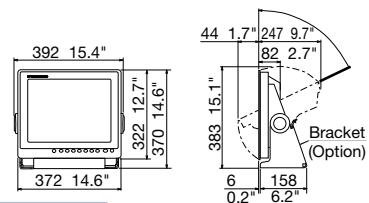

Bracket Mount 18.9 kg 41.7 lb

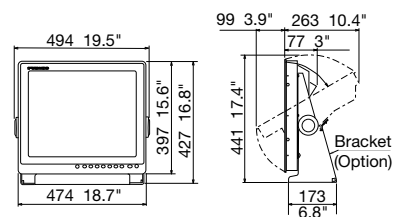

Flush Mount 13.0 kg 28.7 lb

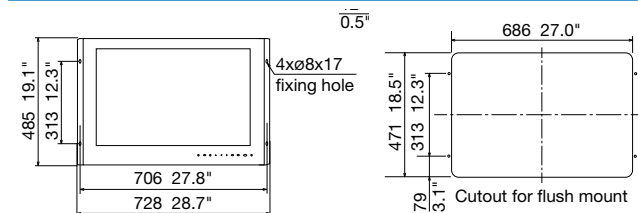

		SCX20	SCX21
GENERAL			
Frequency	1575.42 MHz (GPS/Galileo/QZSS/SBAS), 1602.5625 MHz (GLONASS)		
Tracking Code	C/A (GPS/QZSS/SBAS), E1B (Galileo), 10F (GLONASS)		
Heading/Roll/Pitch Accuracy	1.0° static, 0.5° dynamic		
Heave Accuracy	5 cm (1σ)		
Follow-up	45°/s rate-of-turn		
Position fixing time	50 sec typical		
Position Accuracy	GPS: 5 m approx. (2 drms, HDOP<4), MSAS: 4 m approx. (2 drms, HDOP<4), WAAS 3 m approx. (2 drms, HDOP<4)		
INTERFACE			
NMEA2000	1 Port		-
Interface (NMEA2000)	Input	059362/904.060160/416/928, 061184, 065240, 126208	-
	Output	059932,060928, 061184, 065280,126208/464/992/993/996/998,127250/251/252/257/258,129025/026/029/033/538/539/540/547,130310/312/314/316/577/578/816/817/818/819/820/822/823/826,130833/834/842/843/845/846/847	-
NMEA0183	-		3 Ports NMEA0183, Tx 3 Ch, Rx 2 Ch, PPS 1 Ch RS-485: 1 channel, PPS, rising edge detecting
Interface (NMEA0183)	Input	-	AAM*, APB*, BOD*, BWC*, BWR*, RMB*, TLL*, XTE* (*GP-39 required)
	Output	-	AAM*, APB*, BOD*, BWC*, BWR*, DTM, GGA, GLL, GNS, GSA, GSV, HDG, HDT, HRM, POS, RMB*, RMC, ROT, THS, TLL*, VBW, VTG, XTE*, ZDA (*GP-39 required) P Sentences: GPatt, GPvhe, GPimu, pidat, SDmrk, GPmsv, hdcom
ENVIRONMENT			
Temperature	-25° C to +55° C		
Waterproofing	IP56		
POWER SUPPLY			
12-24 VDC: 0.2-0.1 A (4 LEN @ 9 VDC)			


Drawings

Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

SCX20/21


SCX20 Sensor Unit (Roof Mount)

2.2 kg 4.9 lb

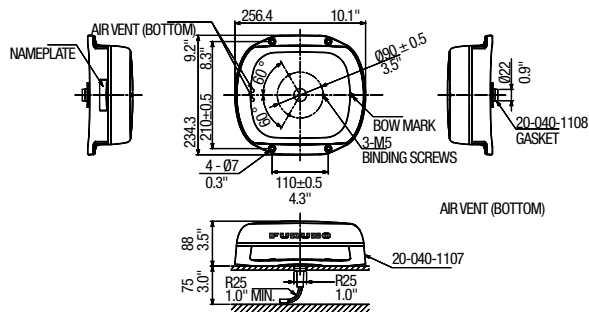


SCX20/21 Sensor Unit (Pole Mount)

1.2 kg 2.64 lb

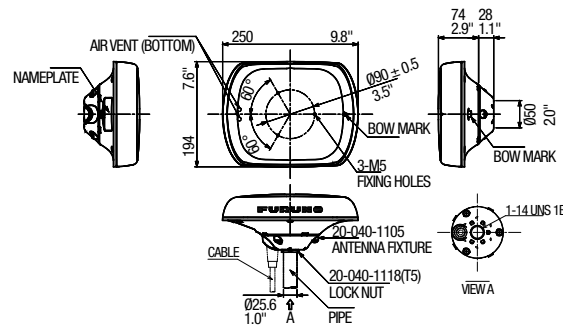

SCX20 Sensor Unit (No Mount)

1.0 kg 2.2 lb

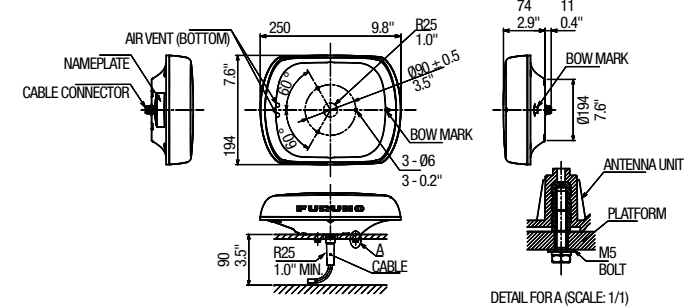


Satellite Compass™

MODEL		SC33	SC70	SC130
GENERAL				
Heading Accuracy		0.4° rms	0.4° rms	0.25° rms
Heading Resolution		0.1°	0.1°, 0.01° or 0.001° (select from menu)	
Follow-up		45°/s rate-of-turn	45°/s rate-of-turn	
Position fixing time		60 sec typical	60 sec typical	
Position Accuracy		GNSS: 5 m approx., SBAS: 4 m approx., WAAS: 3 m approx. (2 drms, HDOP<4)	GPS: 5 m approx., DGPS: 4 m approx., WAAS: 3 m approx., MSAS: 4 m approx. (2 drms, HDOP<4)	
INTERFACE (Junction box)				
NMEA 2000		1 Port	1 Port	
Interface (NMEA2000)	Input	059392/904, 060160/416/928, 061184, 065240, 126208	059392, 059904, 060928, 061184, 126208, 126720, 126996	
	Output	059392, 060928, 061184, 065280, 126208/464/992/993/996/998, 127250/251/252/257/258, 129025/026/029/033/538/539/540/547, 130310/312/314/316/577/578/816/817/818/819/820/822/823/826, 130833/834/842/843/845/846/847	059392, 059904, 060928, 061184, 065280, 126208, 126464, 126720, 126992, 126996, 127250, 127251, 127252, 127257, 127258, 129025, 129026, 129029, 129033, 129044, 129291, 129539, 129540, 129545, 129547, 130310, 130312, 130314, 130316, 130577, 130578, 130822, 130823, 130842, 130843, 130845, 130846	
NMEA0183		--	8 Ports (I/O: 4, 0: 4)	
Interface (NMEA0183)	Input	--	ACK, ACM, ACN, HBT, HDT*1, MSK, MSS, THS, VBW*2, VDR*2, ACK, ACM, ACN, HBT	
	Output	--	ALC, ALF, ALR, ARC, DTM, GBS, GGA, GLL, GNS, GRS, GSA, GST, GSV, HBT, HDG*2, HDM*2, HDT*1, HRM*2, MSK, POS, RMC, ROT, THS, VBW*2, VDR*2, VHW*2, VLW*2, VTG, XDR*2, ZDA, PFEC (GPatt, GPvhe, GPimu, llaIr, pidat)	
LAN		--	2 Ports (100 BASE-TX), RJ45 connector (for IEC61162-450 and maintenance)	
Analog		--	--	
AD-10		--	4 Ports (for heading output)	
USB		--	1 Port (for maintenance)	
DISPLAY UNIT				
Type		--	4.3" Color LCD	
Effective Display Area		--	95.04 (W) x 87.12 (H) mm	
Screen Resolution		--	WQVGA 480 x 272	
Brilliance		--	600 cd/m2 typical	
Contrast		--	17 levels	
Display Mode		--	Heading, Nav data, Rate of turn and Speed (Non-IMO mode only)	
Visible Distance		--	0.65 m nominal	
ENVIRONMENT				
Temperature	Display/Junction Box	--	-15° C to +55° C	
	Antenna Unit	-25° C to +55° C (storage: -25° C to +70° C)	-25° C to +55° C (storage: -25° C to +70° C)	
Waterproofing	Junction Box	--	IP20 (IP22: bulkhead mount)	
	Display Unit	--	IP22 (IP35: option)	
	Antenna Unit	IP56	IP56	
POWER SUPPLY				
12-24 VDC: 0.4-0.2 A (LEN: 11 @9 VDC)			Junction Box: 12-24 VDC, 2.1-1.1 A (included Antenna Unit and Display Unit)	


SC33

Sensor Unit 2.5 kg 5.5 lb




SC70/130


SC70/130 Display Unit 0.7 kg 1.5 lb

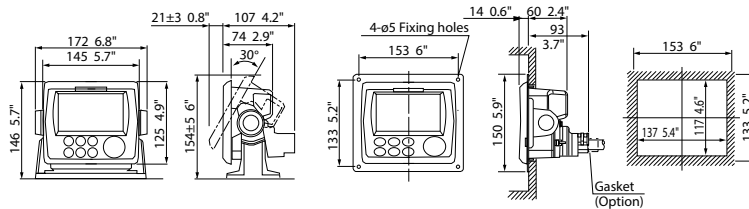


SC70 Sensor Unit 2.8 kg 6.17 lb



SC130 Sensor Unit 7.1 kg 15.6 lb



SC70/130 Junction Box 2.9 kg 6.39 lb



AIS Receiver		Class-B+ AIS Transceiver		U-AIS Transponder					
MODEL		FA40		FA70		FA170			
STANDARDS									
		IEC 60945 Ed.4 IMO MSC.140 (76) ITU-R M.1371-5, EN 303 413 V1.1.1 EN 301 843-1 V2.2.1 IEC 60945 Ed.4+CORR.1, IEC 62368-1 Ed.3		IMO MSC.140 (76) ITU-R M.1371-5, DSC: ITU-R M.825-3 IEC 62287-1 Ed.3.0, IEC 62287-2 Ed.2.0, EN 303 413 V1.1.1, EN 301 843-1 V2.2.1 IEC 60945 Ed.4+CORR.1, IEC 62368-1 Ed.3, IEC 62311 Ed.1+Ed.2		IMO MSC.74(69) ANNEX 3, IMO MSC.302(87), IMO A.694(17), IMO MSC.191(79), ITU-R M.1371-5, DSC ITU-R M.825-3, IEC61993-2 Ed. 2, IEC60945 Ed. 4 CORRIGENDUM 1, IEC 62288 Ed. 2, IEC 61162-1 Ed. 4, IEC 61162-2 Ed. 1, IEC61162-450 Ed. 1			
TRANSPONDER UNIT									
TX/RX Frequency (FA40: RX Frequency)		156.025 to 162.025 MHz							
Output Power		----				5 W or 1 W(SOTDMA), 2 W(CSTDMA)		1 W / 12.5 W	
Channel Spacing		25 kHz				25 kHz		25 kHz	
MONITOR UNIT									
Type		----				----		4.3" Color LCD	
Effective Viewing Area		----				----		95.04 (W) x 53.8 (H) mm	
Screen Resolution		----				----		480 x 272 dots	
GPS RECEIVER									
Receiving Channels		----				12 channels, SBAS 2 channels, 14 satellites tracking		12 channels parallel, 12 satellites tracking	
Rx Frequency		----				1575.42 MHz			
Rx Code		----				C/A code			
Position Accuracy		----				13 m (2 drms, HDOP <= 4)		GPS: less than 13 m (2 drms, HDOP < 4) DGPS: less than 5 m (2 drms, HDOP < 4)	
INTERFACE									
NMEA0183		Input ACA, ACK, AIQ, DTM, GBS, GGA, GLL, GNS, HDT, OSD, RMC, SSD, THS, VBW, VSD, VTG		ACK, AIQ, BBM, HDT, SSD, THS, VSD (ABM, BBM: SOTDMA only)		ABM, ACA, ACK, ACM, ACN, AIQ, AIR, BBM, DTM, EPV, GBS, GGA, GLL, GNS, HBT, HDT, LRF, LRI, OSD, PIWWIVD, PIWWSPW, PIWWSSD, PIWWVSD, RMC, ROT, SPW, SSD, THS, VBW, VSD, VTG			
		Output ABK, ACA, ACS, ALR, GGA, GLL, RMC, SSD, TXT, VDM, VDO, VER, VSD, VTG		ABK, ACA, ACS, ALR, GGA, GLL, RMC, SSD, TXT, VDM, VDO, VER, VSD, VTG		ABK, ACA, ACS, ALC, ALF, ALR, ARC, EPV, HBT, LR1, LR2, LR3, LRF, LRI, NAK, PIWWI- VD, PIWWSPR, PIWWSSD, PIWWVSD, SSD, TRL, TXT, VER, VDM, VDO, VSD			
NMEA2000		Input 059392, 059904, 060160, 060416, 060928, 065240, 126208, 127250		059392, 059904, 060160, 060416, 060928, 065240, 126208, 127250		----			
		Output 059392, 059904, 060928, 126208, 126464, 126992, 126993, 126996, 126998, 127258, 129025, 129026, 129029, 129038, 129039, 129040, 129041, 129540, 129792, 129793, 129794, 129795, 129796, 129797, 129798, 129800, 129801, 129802, 129803, 129804, 129805, 129806, 129807, 129809, 129810, 129811, 129812, 129813		059392, 059904, 060928, 126208, 126464, 126992, 126993, 126996, 126998, 127258, 129025, 129026, 129029, 129038, 129039, 129040, 129041, 129540, 129792, 129793, 129794, 129795*, 129796, 129797, 129798, 129800, 129801, 129802, 129803, 129804*, 129805, 129806, 129807, 129809, 129810, 129811, 129812*, 129813* (*SOTDMA mode only)		----			
Ethernet		----				----		100Base-TX, RJ45 connector, Auto MDI/MDIX	
ENVIRONMENT									
Temperature		Antenna Unit Other Units		---- -25° C to +70° C -15° C to +55° C				-30° C to +70° C	
Waterproofing		Antenna Unit Other Units		---- IP55				IP56 Transponder unit: IP22 at bulkhead mount, IP20 at floor Monitor unit: IP22, IP35 with optional waterproofing kit Pilot plug unit: IP22 (front panel), Power supply unit: IP22	
POWER SUPPLY									
Transponder Unit (FA30: Receiver Unit)		12-24 VDC, 0.3-0.2 A				12-24 VDC, 1.8-0.9 A		12-24 VDC, 6-3 A	
Display Unit:		----				----		12 VDC, 0.3 A max.	



FA40/70

Receiver Unit
FA40

0.45 kg 1.0 lb

Transceiver Unit
FA70

0.5 kg 1.1 lb

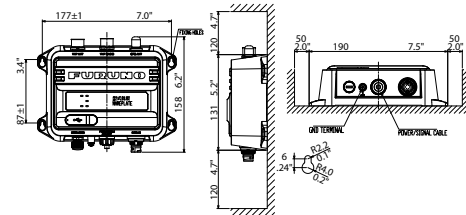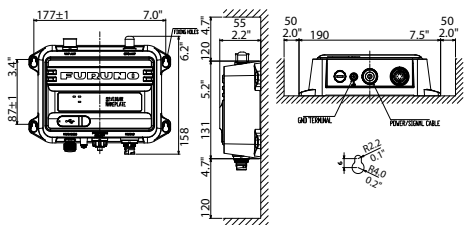

FA170

Transponder Unit
FA1701

3.0 kg 6.6 lb

Display Unit
FA1701





0.6 kg 1.3 lb

GPS/VHF Combined Antenna
VA100T

3.3 kg 7.3 lb

GPS Antenna
GPA017S

0.15 kg 0.3 lb



Marine VHF Radiotelephone

FM4800/4850

MODEL		
GENERAL CHARACTERISTICS		
Frequency Range		TX: 156.025 to 162.000 MHz, RX: 155.500 to 163.275 MHz
Communication System		Simplex/Semi-duplex
Modulation		16K0G3E (F3E) Voice, 16K0G2B (F2B) DSC
Display		Monochrome, 192 x 128 dot (FM-4800 / HS-4800 only)
TRANSMITTER		
Output Power		25 W max, 1 W at power reduction
Max. Frequency Deviation		±5 kHz max
Spurious Emission Standby/Transmit		less than 2 nW / less than 0.25 uW
RECEIVER		
Sensitivity		+6 dBuV (e.m.f) or less (SINAD 20 dB)
Adjacent Channel Selectivity		70 dB or more
Spurious Response		70 dB or more
DSC RECEIVER		
Protocol		Class D DSC
Sensitivity		0 dBuV (e.m.f) or less (BER < 1%)
Adjacent Channel Selectivity		70 dB or more
Spurious Response		70 dB or more
AIS RECEIVER		
Receiving Frequency (CH)		161.975 MHz (AIS1), 162.025 MHz (AIS2)
Sensitivity		-107 dBm or less (PER < 20%)
Adjacent Channel Selectivity		70 dB or more
Spurious Response		70 dB or more
GPS RECEIVER (FM-4800 only)		
Receiving Frequency		1575.42 MHz
Number of Channel		72 channels
Horizontal Accuracy		10 m
Position Fixing Time		Cold start: 120 sec typical
Position Update Interval		1 sec
LOUD HAILER/FOG HORN		
Output Power		30 W Max. (4 ohm)
INTERFACE		
NMEA2000		1 port, LEN: 3
Interface	Input	059392, 059904, 060160, 060416, 060928, 065240, 126208, 127258, 129026, 129029, 129044
	Output	059392, 060928, 126208, 126464, 126993, 126996, 126998, 129025, 129026, 129029, 129038, 129039, 129040, 129041, 129540, 129793, 129794, 129795, 129797, 129798, 129801, 129802, 129808, 129809, 129810
NMEA0183		1 port
NMEA0183	Input	DTM, GGA, GLL, GNS, RMA, RMC
	Output	DSC, DSE, GLL, RMC, VDM
ENVIRONMENT		
Temperature		-15° C to +55° C
Waterproofing		IP67
POWER SUPPLY		
		12 VDC (-10% to +30%), 5.0 A max.

Drawings - FM4800/4850 *Refer to Online manual for more details. For illustration purposes only; not drawn to scale.*

Transceiver Unit FM4800

1.7 kg 3.8 lb

Microphone MIC4800 (FM4800 only)

0.25 kg 0.56 lb

Transceiver Unit FM4850


1.75 kg 3.85 lb

Handset HS4800 (option)

0.3 kg 0.66 lb

Speaker SP4800 (option)

0.76 kg 1.69 lb

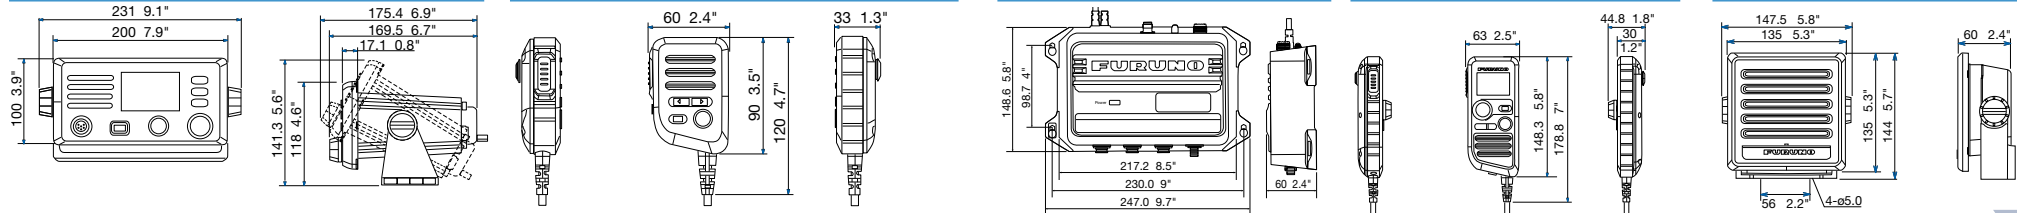


VHF Radiotelephone FM8900S

MODEL		FM8900S
GENERAL CHARACTERISTICS		
Class of Emission	G3E (Radiotelephone), G2B (DSC)	
Communication System	Simplex/Semi-duplex	
Channels	All VHF channels according to ITU-R Radio Regulations Appendix 18, All channels in FCC Part 80, Max 20 Private channels where permitted by Administrations (preset by the service agent), 10 weather channels (USA and Canada, receive only)	
Rules and Regulations	VHF Radiotelephone: EN 301 925 V1.4.1 (2013.5) VHF ATIS: EN 300 698-1 V1.4.1 (2009.12), EN 301 925 V1.5.1(2017) DSC: Rec. ITU-R M.541-10, M.493-14 (class A), M.689-2, M.821-1	
Display	4.3 inches WQVGA (480 x 272 dots), color dot matrix LCD	
TRANSMITTER		
Frequency Range	155.00 - 161.600 MHz	
RF Output Power	High: Max 25 W, Low: Not exceed 1 W US version: Manual override for 25 W available on CH13, CH67 and CH77 (usually not exceed 1 W)	
Frequency Stability	less than ± 1.5 kHz	
RECEIVER		
Frequency Range	Simplex	155.000 - 161.600 MHz
	Semi-duplex	159.600 - 164.200 MHz
Receiving System	Double-conversion super-heterodyne 1st IF : 51.1375 MHz, 2nd IF: 62.5 kHz	
AF Output Power	3 W (4 Ω loud speaker), 2 mW (150 Ω handset)	
Audio Response	De-emphasis of 6 dB/oct +1/-3 dB	
Sensitivity	less than 6 dB μ V at SINAD 20 dB	
Adjacent Channel Selectivity	70 dB or more	
DSC SECTION		
Message Log	Receive	50 distress messages plus 50 non-distress messages
	Transmit	50 messages
Interface	Nav data	IEC61162-1 Ed.4
	Printer	Centronics-compatible
Alarm	Audible and visual on receipt of a DSC call	
Receiver Characteristics	DSC frequency	156.525 MHz (CH70)
	Calling sensitivity	Symbol error rate: less than 1% (at 0 dB μ V)
ENVIRONMENT		
Temperature	-15° C to +55° C	
Waterproofing	FM8900S: IP20 (IP22 with option), HS-2003: IP24, RB-8900: IP22	
POWER SUPPLY		
VDC	24 VDC	
RX	2.3 A (max.), 1.3 A (standby)	
TX	4.7 A (max.)	

FM8900S


Transceiver Unit (Flush Mount)

4.2 kg 9.3 lb

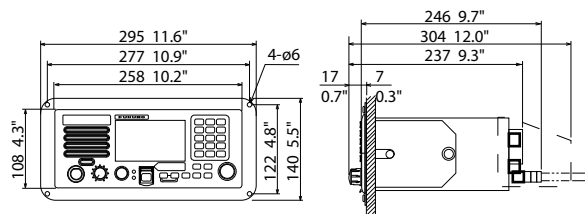


Remote Station RB8900

0.7 kg 1.5 lb



Handset HS2003

0.2 kg 0.4 lb




MF/HF Radiotelephone

MODEL		FS1575	FS2575
GENERAL			
Frequency Range	TX	1.6 to 27.5 MHz (100Hz Steps)	
	RX	0.1 to 29.9 MHz (10Hz Steps)	
Channels	256 user-specified channels plus ITU, SSB/TELEX channels		
Rules and Regulations	ITU-R M. 1082-1, ITU-R M. 1173-1, ITU-R M. 476-5, ITU-R M. 490, ITU-R M. 491-1, ITU-R M. 492-6, ITU-R M. 493-14, ITU-R M. 541-10, ITU-R M.625-4, ITU-R M.821-1, IMO Res. A. 694 (17), IMO Res. A. 806 (19), IMO Res. MSC36 (63), IMO Res. MSC68 (68), IMO Res. MSC302 (87), MSC/Circ. 862, IEC 61162-1 Ed. 5, IEC 60945 Ed. 4, ETS 300 067 ed. 1, EN 300 338-1 V1.4.2, EN 300 338-2 V1.4.1, EN 301 033 V1.3.1, EN 300 033 V1.41 EN 300 373-1 V1.41		
Communication System	Simplex/semi-duplex		
Class of Emission	J3E, H3E, A1A, J2B		
TRANSCEIVER			
RF Output Power	150 W pep	250 W pep	
Antenna	10-18 m whip or wire		
Tuning Speed	within 15 sec.		
Receiver Sensitivity	less than +7 dBµV (4.0-29.9999 MHz, J3E) / less than +13 dBµV (1.6-4 MHz, J3E)		
DSC			
Receiving	General	All DSC frequencies in MF/HF	
Frequency	Distress and safety	DSC distress/safety frequencies: 2187.5 kHz, 4207.5 kHz, 6312.0 kHz, 8414.5 kHz, 12577 kHz, 16804.5 kHz	
Message Storage	TX:	50 distress messages, plus 50 non-distress messages	
	RX:	50 messages, telephone no., frequencies, etc.	
POWER SUPPLY			
	24 VDC, 20 A (TX), 5.0 A (RX)	24 VDC, 40 A (TX), 5.0 A (RX)	
	100/110/200/220 VAC Power Supply PR-300	100/110/120/200/220/240 VAC with optional AC/DC Power Supply PR-850A	


Drawings Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

FS1575/2575


Transceiver Unit
FS1575T **16 kg 35.2 lb**




Transceiver Unit
FS2575T **20 kg 44.1 lb**

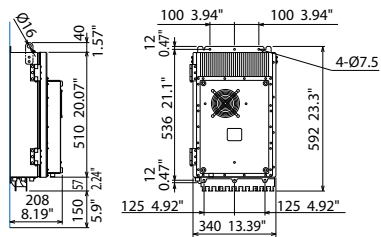


Antenna Coupler
AT5075 **9.2 kg 20.1 lb**




Antenna Coupler
AT1575SUS **8.8 kg 19.4 lb**




Antenna Coupler
AT1575AES **2.6 kg 5.7 lb**



Controller Unit
FS2575C **1.8 kg 4.0 lb**

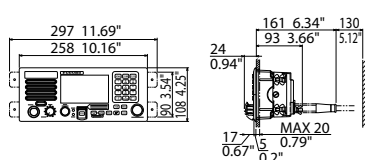

Headset
HS2003 **0.5 kg 1.2 lb**



NAVTEX Receiver		
MODEL	NX300	
NAVTEX RECEIVER		
Receiving Frequency	518 kHz or 490 kHz	
Mode of Reception	F1B	
Sensitivity	2µ V e.m.f. (50 ohms), 4% error rate	
Message Category	A: Navigational warning B: Meteorological warning C: Ice report D: Search and rescue information/piracy and armed robbery E: Meteorological forecast F: Pilot message G: AIS Service message H: Loran-C message I: Reserve-presently not used J: Differential omega message K: Other electronic navigational aid and system message L: Navigational warning (additional) M to Y: Reserve , presently not used V: Notice to Fishermen (US only) Z: QRU (no message on hand)	
DISPLAY		
Display	4.5" Monochrome LCD	
Effective display area	95 (W) X 60 (H) mm	
Pixel number	120 x 64	
Display Modes	Message Selection, NAV Data, Message Display	
Message Storage	28,000 Characters	
Languages	English, Spanish, German, French, Italian, Danish, Dutch, Portuguese	
INTERFACE		
Input	0183 Ver.1.5/2.0, RS-232C, 4800 bps GGA, GLL, RMB, ZDA	
Output	Message data for personal computer, RS-232C, 4800 bps	
ENVIRONMENT		
Temperature	Antenna unit	-25° C to +70° C
	Display unit	-15° C to +55° C
Waterproofing	Antenna unit	IPX6
	Display unit	IPX5
POWER SUPPLY		
12-24 VDC: 180-90 mA		

Loud Hailer with Intercom	
MODEL	LH5000
AUDIO OUTPUT	
Hail	30 W, 8 Ω (at 1 kHz, 10 % distortion)
Intercom speaker	5.0 W, 8 Ω (at 1 kHz, 10 % distortion)
Internal speaker	2.5 W, 8 Ω (at 1 kHz, 10 % distortion)
External speaker	5.0 W, 8 Ω
INPUT IMPEDANCE	
Microphone	600 Ω
Auxiliary Input	5 kΩ
ENVIRONMENT	
Temperature	-15°C to +55°C (IEC60945)
Waterproofing	IP67 (IEC60529)
POWER SUPPLY	
Full Load	12 VDC, 11 A
Standard	12 VDC, 5 A
Standby	12 VDC, 280 mA


NX300

Display Unit NX300

0.68 kg 1.5 lb

Antenna Unit NX3H-D

0.9 kg 2.0 lb

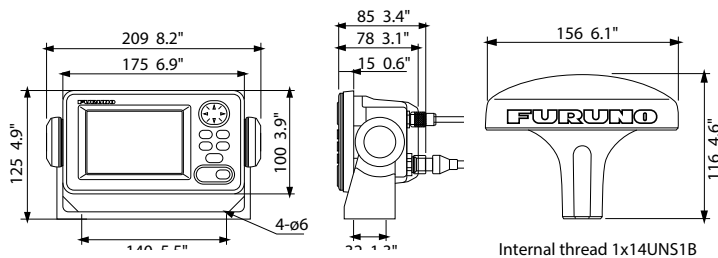

LH5000

Loud Hailer


1.61 kg 3.5 lb

Microphone MIC5000

1.61 kg 3.5 lb

Intercom Speaker (option)

0.76 kg 1.7 lb

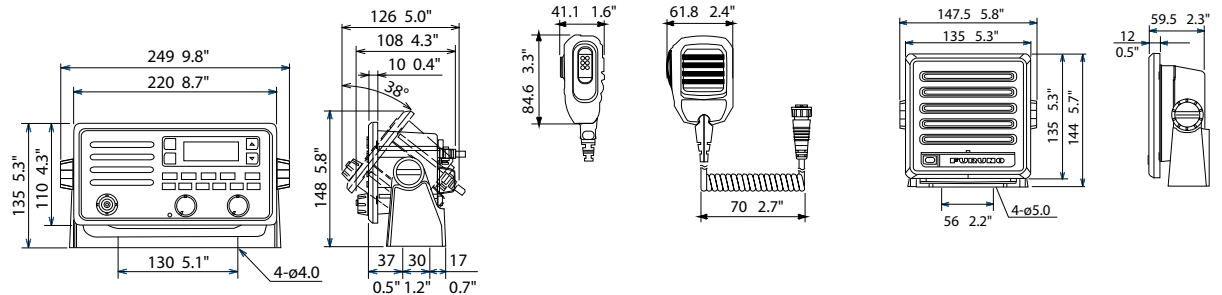

**Facsimile Receiver
FAX30**



MODEL		FAX30
GENERAL		
Frequency Range	80 kHz to 160 kHz, 2 MHz to 25 MHz, 490 kHz, 518 kHz (NAVTEX)	
Class of Emission	F3C, J3C, F1B (NAVTEX)	
Receiving System	Double superheterodyne	
Number of Channel	1000 channels	
Storage	Fax	12 pictures
	NAVTEX	130 messages
Scanning Speed	60, 90, 120, 180 or 240 rpm, automatic or manual selection	
I.O.C.	576 or 288, automatic or manual selection	
Display Color	Monochrome, 8 shades of gray, Blue shades, Pink and black, Red and blue	
Networking Standard	Ethernet 10Base-T TCP/IP	
ENVIRONMENT		
Temperature	-15° C to +55° C	
Waterproofing	IPX2	
POWER SUPPLY		
	12-24 VDC: 1.0-0.5 A	
MINIMUM SYSTEM REQUIREMENTS FOR PC		
OS	Windows 98, 2000, ME, XP, Vista, 7, 8(32 bit/64 bit)	
CPU	600 MHz or faster	
RAM	128 MB or more	
Resolution	1024 x 768 pixels	
Browser	Internet Explorer Ver.5.01 5.5 6.0 7.0 8.0 10.0 11.0 Netscape Communicator Ver. 4.78/6.2/7.0	

Drawings

Refer to Online manual for more details. For illustration purposes only; not drawn to scale.

FAX30

Receiver Unit 2.0 kg 4.4 lb Preamp FAX5 2.0 kg 4.4 lb



INMARSAT FleetBroadband

FELCOM251

FELCOM501

GENERAL			
Transmitting Frequency		1626.5 - 1660.5, 1668.0 - 1675.0 MHz	
Receiving Frequency		1518.0 - 1559.0 MHz	
INTERFACE			
Ethernet	RJ45	4 ports	
2-wire analog telephone	RJ11	2 ports (4 ports with optional adapter)	
USB		1 port USB 2.0 (RS-232C with optional adapter)	
Alarm output		1 port Contact Closure (normal close), external relay	
SIM Card		1 slot	
COMMUNICATION SERVICES			
Voice		4 kbps AMBE+2 or ISDN 3.1 kHz Audio	
Data	ISDN UDI/RDI	-	64 kbps
	Standard IP(Best Effort Delivery)	Up to 284 kbps	Up to 432 kbps
	Streaming IP(Guaranteed Service Rate)	32, 64, 128 kbps	32, 64, 128, 256 kbps
SMS (Short Message Service)		Up to 1,120 characters	
FAX		G3 Fax through 3.1 kHz audio	
ENVIRONMENT			
Temperature	Antenna Unit (operative temperature)	-25° C to +55° C	
	Antenna Unit (storage temperature)	-40° C to +70° C	
	Below Deck Unit (operative temperature)	-25° C to +55° C	
Waterproofing		Antenna: IPX6, Below Deck Unit: IP31, Handset: IP56 (Cradle: IP22)	
POWER SUPPLY			
Communication Unit		12-24 VDC: 14/5.5 A	
Power Supply Unit		100-240 VDC, 1 Phase, 50-60 Hz	





FELCOM251/501

Antenna
FB1251 3.9 kg 8.6 lb

Antenna
FB1501 23 kg 50.7 lb

FELCOM251/501 Communication Kit
FB2001 2.5 kg 5.5 lb

Handset
FB8001 0.63 kg 1.4 lb

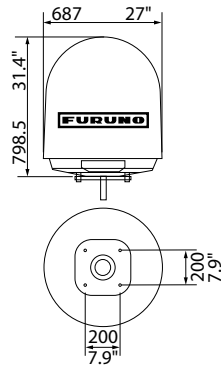





Recommendations



Common Runabout Product Recommendations

- NMEA2000
- Ethernet
- Other

Product suggestions only - not an installation diagram

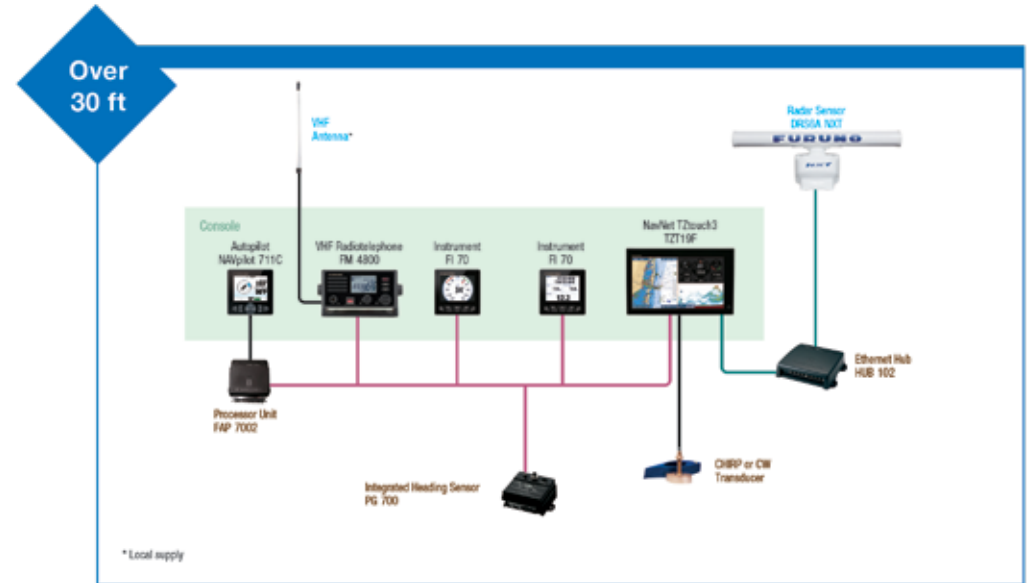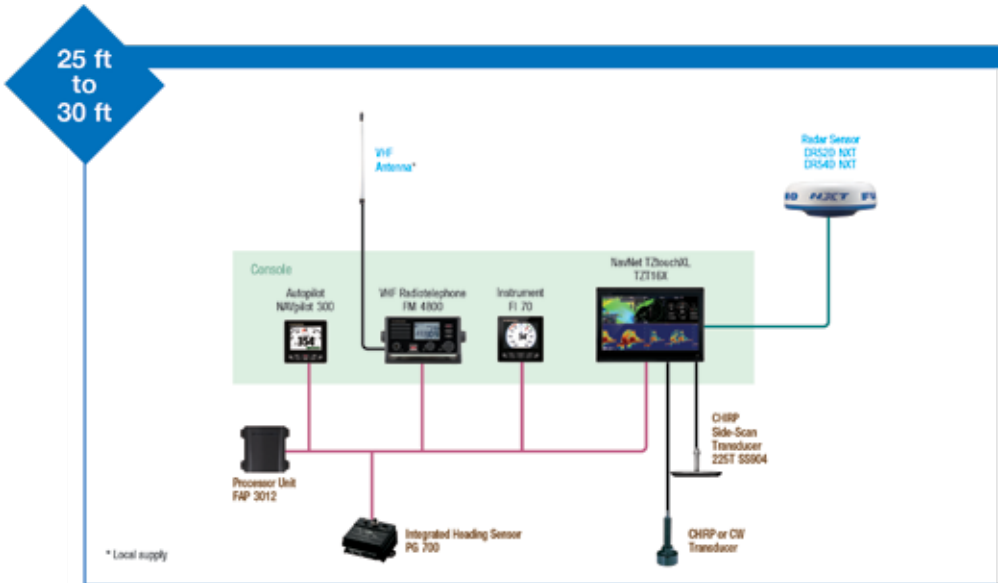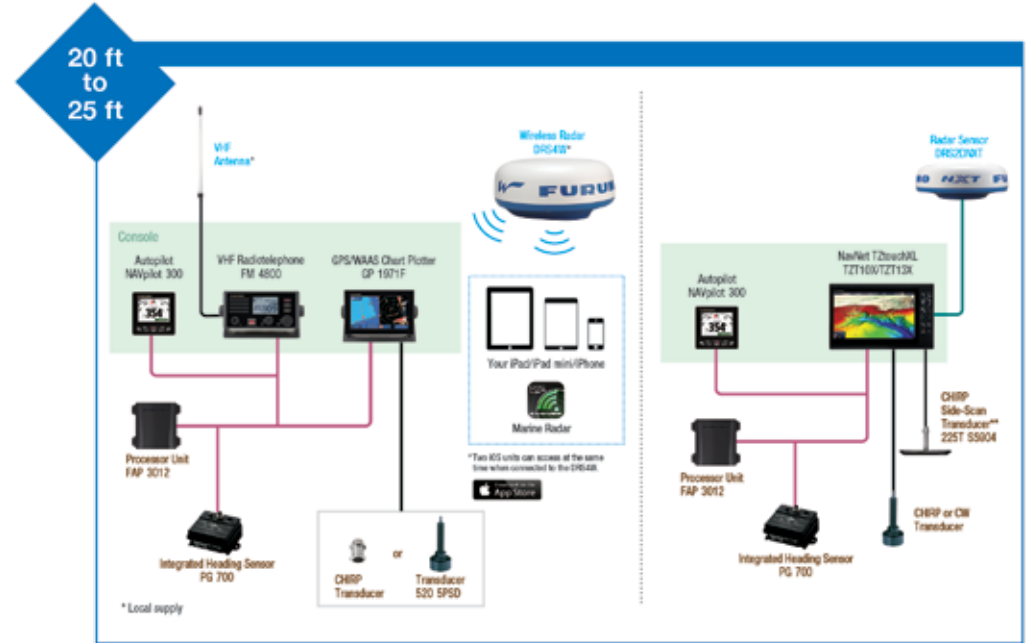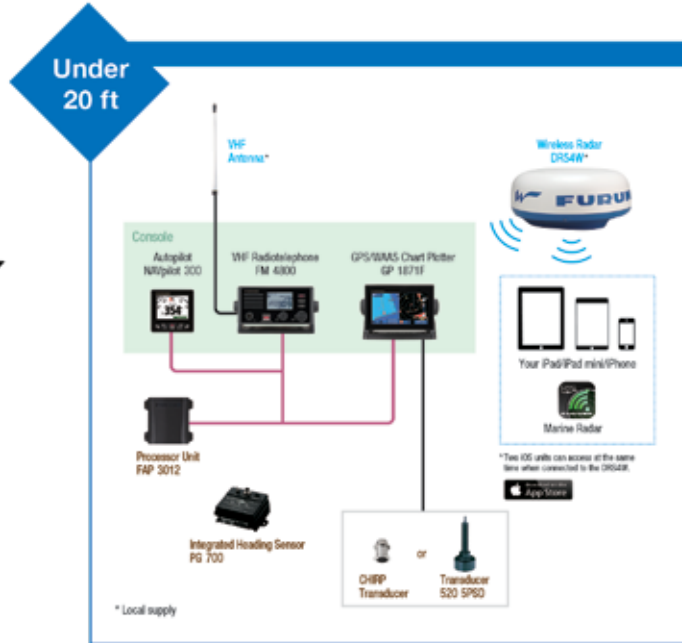

Recommendations




Common Sport Cruiser Product Recommendations


- NMEA2000
- Ethernet
- Other

Product suggestions only - not an installation diagram


Under 30 ft

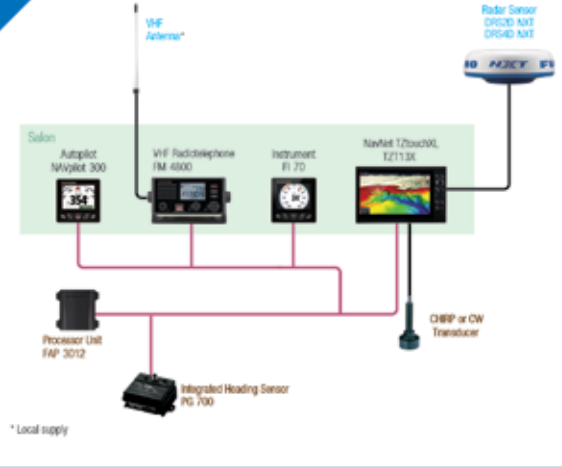


30 ft to 50 ft

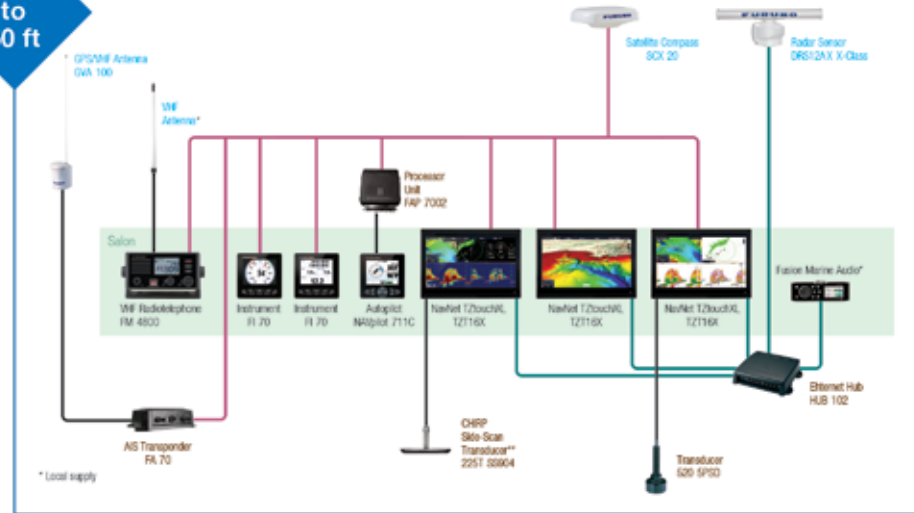

50 ft to 80 ft

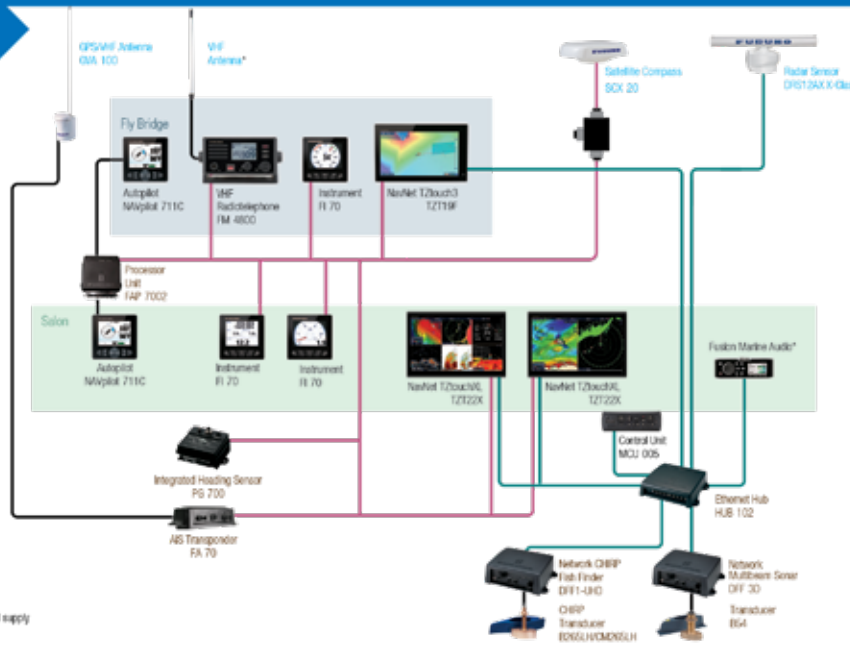

Over 80 ft

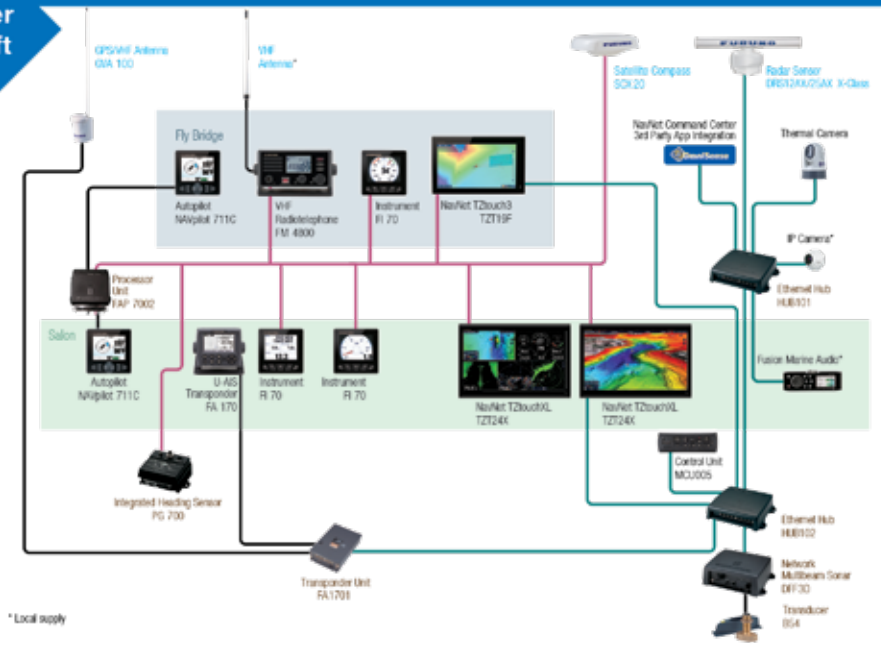

Furuno's Global Network

LEGEND:

- Subsidiaries and Representative Offices
- Service Centers
- National Distributors

HISTORY:

Founded in 1938 as FURUNO ELECTRIC SHOKAI LTD., FURUNO ELECTRIC CO., LTD. is recognized as the world leader in Marine Electronics. Our founder's principle goal of modernizing fisheries led to the world's first practical commercial Fish Finder in 1948.

In 1972, Furuno was awarded the NMEA (National Marine Electronics Association) Best Product Award in the Fish Finder category in the US. Since then, Furuno has won 230 NMEA Awards, more than any other two manufacturers combined.

Furuno established its first overseas subsidiary in Norway in 1974, which was followed by the establishment of subsidiaries in the US (1978) and the UK (1979), foreshadowing its full-scale entry into the international business arena.



FURUNO ELECTRIC CO., LTD.
9-52 Ashihara-cho, Nishinomiya City,
Hyogo. 662-8580, Japan
Phone: +81-798-65-2111
Fax: +81-798-63-1020
URL: <http://www.furuno.com>



FURUNO U.S.A., INC.
4400 N.W. Pacific Rim Boulevard
Camas Washington 98607-9408, U.S.A.
Phone: +1 360-834-9300
Fax: +1 360-834-9400
URL: <http://www.furunousa.com/>



FURUNO U.S.A., INC.
East Coast Office
 70 Engerman Ave.
 Denton Maryland 21629, U.S.A.
 Phone: +1 410-479-4420
 Fax: +1 410-479-4429



FURUNO PANAMA, S.A.
 Zona Procesadora de Corozal, Edificio 354B, Panama,
 Republica de Panama
 Phone: + 507 317 6556/6557/6558
 Fax: + 507 317 6559
 URL: <http://furuno.com.pa/>



FURUNO CHINA CO., LTD.
 Unit C on 7th Floor, KC100
 100 Kwai Cheong Road,
 Kwai Chung, NT, Hong Kong
 Phone: +852 2165 3700
 Fax: +852 2362 0738



FURUNO (UK) LTD.
 West Building Penner Road
 Havant Hampshire PO9 1QY, U.K.
 Phone: +44 23-9244-1000
 Fax: +44 23-9248-4316
 URL: <http://www.furuno.co.uk/>



FURUNO FINLAND OY
 Niittyrinne 7 02270 Espoo, Finland
 Phone: +358 9-4355-670
 Fax: +358 9-4355-6710
 URL: <http://www.furuno.fi/>



FURUNO SHANGHAI CO., LTD.
 6F, Yuanhai Science and Research Building,
 738 Shen Jia Long Road, Pudong, Shanghai, China
 Phone: +86 21 6596 9098
 URL: <http://www.furuno.com/cn/>



FURUNO DANMARK A/S
 Hammerholmen 44-48 DK-2650
 Hvidovre, Denmark
 Phone: +45 36-77-45-00
 Fax: +45 36-77-45-01
 URL: <http://www.furuno.dk/>



FURUNO POLSKA Sp. z o.o.
 Ul. Wolnosci 20 81-327 Gdynia, Poland
 Phone: +48 58-669-02-20
 Fax: +48 58-669-02-21
 URL: <http://www.furuno.pl/>



FURUNO KOREA CO., LTD.
 1st-2nd 5th Fl., Cheong-hae Bldg.,
 (Choryang-dong), 16-14, Jungang-daero
 180beon-gil, Dong-gu, Busan, 48822 Korea
 Phone: +82 51 440 8900
 Fax: +82 51 440 8901



FURUNO SVERIGE AB
 S-421 30 Västra Frölunda, Sweden
 Phone: +46 31-709-89-40
 Fax: +46 31-49-70-93
 URL: <http://www.furuno.se/>



FURUNO DEUTSCHLAND GmbH
 Siemensstraße 33 25462 Rellingen, Germany
 Phone: +49 4101-838-0
 Fax: +49 4101-838-111
 URL: <http://www.furuno.de/>



FURUNO SINGAPORE PTE LTD
 17 Loyang Lane, Singapore 508917
 Phone: +65 6745 8472
 Fax: +65 6747 1151
 URL: <http://www.furuno.sg/>



FURUNO FRANCE S.A.S.
 12 Avenue de la Grande Semaine Parc
 d'activité Vert Castel 33700 Mérignac, France
 Phone: +33 5-56-13-48-00
 Fax: +33 5-56-13-48-01
 URL: <https://www.furuno.fr/>



FURUNO HELLAS S.A.
 10 Thetidos str.
 16675 Glyfada, Greece
 Phone: +30 210 4004426
 Fax: +30 210 4004570
 URL: <http://www.furuno.gr/>



PT FURUNO ELECTRIC INDONESIA
 Cowell Tower, 8th floor,
 Jl. Senen Raya No. 135 Jakarta 10410, Indonesia
 Phone: +62 (0)213511282
 Fax: +62 (0)213511283
 E-mail: fid@furuno.id
 URL: <http://www.furuno.id/>



FURUNO ITALIA S.R.L.
 Via Ottorino Respighi 29,
 47043 Gatteo, Italy
 Phone: +39 0541 1849400
 URL: <https://www.furuno.it/>



FURUNO (CYPRUS) LTD
 Kofteros Business Center, Office 103
 182, Agias Filaxeos, 3083, Limassol, Cyprus
 Phone: +357 25 734466
 Fax: +357 25 734460
 URL: <http://www.furuno.com.cy/>



FURUNO ELECTRIC (MALAYSIA) SDN. BHD.
 K03-03-13, Level 3, Tower 3, UOA Business
 Park No.1, Jalan Pengaturcara U1/51A,
 Seksyen U1, 40150 Shah Alam, Selangor, Malaysia
 Phone +60 (0)3 5569 3613
 Fax +60 (0)3 5569 3919
 URL <http://www.furuno.my/>



FURUNO ESPAÑA S.A.
 Francisco Remiro, 2-B 28028 Madrid, Spain
 Phone: +34 91-725-90-88
 Fax: +34 91-725-98-97
 URL: <http://www.furuno.es/>



FURUNO NORGE A/S
 Sjømannsveien 19 6008 Ålesund, Norway
 Phone: +47 70-10-29-50
 Fax: +47 70-10-29-51
 URL: <http://www.furuno.no/>

NORTH AMERICA

U.S.A. / CANADA

FURUNO U. S. A., INC.
4400 N.W. Pacific Rim Boulevard
Camas, Washington 98607-9408
Phone: +1 360-834-9300
Fax: +1 360-834-9400
E-mail: info@furuno.com

East Coast Office:
FURUNO U. S. A., INC.
70 Engerman Ave.
Denton
Maryland 21629
Phone: +1 410-479-4420
Fax: +1 410-479-4429

CENTRAL/SOUTH AMERICA

PANAMA

FURUNO PANAMA, S.A.
Zona Procesadora de Corozal, Edificio 354B,
Panama, Republica de Panama
Phone: +507 317 6556/6557/6558
Fax: +507 317 6559
E-mail: info@furuno.com.pa (Sales)
service@furuno.com.pa (Service)

ARGENTINA

Refer to **FURUNO U. S. A., INC.**, U.S.A.

BRAZIL

Refer to **FURUNO U. S. A., INC.**, U.S.A.

CHILE

Refer to **FURUNO U. S. A., INC.**, U.S.A.

COLOMBIA

Refer to **FURUNO U. S. A., INC.**, U.S.A.

CURACAO

Refer to **FURUNO U. S. A., INC.**, U.S.A.

ECUADOR

Refer to **FURUNO U. S. A., INC.**, U.S.A.

MEXICO

Refer to **FURUNO U. S. A., INC.**, U.S.A.

PERU

Refer to **FURUNO U. S. A., INC.**, U.S.A.

TRINIDAD AND TOBAGO

Refer to **FURUNO U. S. A., INC.**, U.S.A.

URUGUAY

Refer to **FURUNO U. S. A., INC.**, U.S.A.

VENEZUELA

Refer to **FURUNO U. S. A., INC.**, U.S.A.

EUROPE

ALBANIA

Refer to **FURUNO HELLAS S.A.**, GREECE

BELGIUM

Refer to **FURUNO FRANCE S.A.S.**, FRANCE

BULGARIA

Refer to **OZSAY**, TURKEY

CROATIA / SLOVENIA

Refer to **FURUNO ITALIA S.R.L.**, ITALY

CYPRUS

FURUNO (CYPRUS) LTD
Kotteros Business Center, Office 103
182, Agias Filaxeos, 3083, Limassol, Cyprus
Phone: +357 25 734466
Fax: +357 25 734460
Email: info@furuno.com.cy,
sales@furuno.com.cy,
tech@furuno.com.cy

DENMARK

FURUNO DANMARK AS
Hammerholm 44-48
DK-2650 Hvidovre
Phone: +45 36 77 45 00
Fax: +45 36 77 45 01
Telex: 27289 FURUNO DK
E-mail: furuno@furuno.dk

ESTONIA

Refer to **FURUNO DANMARK AS**, DENMARK

FAROE ISLANDS

Refer to **FURUNO DANMARK AS**, DENMARK

FINLAND

FURUNO FINLAND OY
Nittyrinne 7 02270 Espoo
P.O.Box 74 FI-02271 Espoo
Phone: +358 9 4355670
Fax: +358 9 43556710
E-mail: info@furuno.fi

FRANCE

FURUNO FRANCE S.A.S.
12 Avenue de la Grande Semaine Parc
d'activité Vert Castel 33700 MERIGNAC FRANCE
Phone: +33 5 56 13 48 00
Fax: +33 5 56 13 48 01
E-mail: info@furuno.fr
sales@furuno.fr

GERMANY

FURUNO DEUTSCHLAND GmbH
Siemensstrasse 33
25462 Reilingen
Phone: +49 4101 838 0
Fax: +49 4101 838 111
E-mail: furuno@furuno.de

GREECE

FURUNO HELLAS S.A.
10 Thetidos str.
16675 Glyfada
Phone: +30 210 4004426
Fax: +30 210 4004570
E-mail: sales@furuno.gr (Sales)
salesgr@furuno.com.cy (Sales)
tech@furuno.gr (Service)
techgr@furuno.com.cy (Service)

GREENLAND

Refer to **FURUNO DANMARK AS**, DENMARK

ICELAND

Refer to **FURUNO DANMARK AS**, DENMARK

IRELAND

Refer to **FURUNO (UK) LIMITED**, UK

ITALY

FURUNO ITALIA S.R.L.
Via Ottorino Respighi 29,
47043 Gatteo, Italy
Phone: +39 0541 1849400
E-mail: sales@furuno.it (Sales)
service@furuno.it (Service)

LATVIA

Refer to **FURUNO DANMARK AS**, DENMARK

LITHUANIA

Refer to **FURUNO DANMARK AS**, DENMARK

MALTA G.C.

Refer to **FURUNO ITALIA S.R.L.**, ITALY

MONACO

Refer to **FURUNO FRANCE S.A.S.**, FRANCE

MONTENEGRO

Refer to **FURUNO ITALIA S.R.L.**, ITALY

NETHERLANDS

Refer to **FURUNO DEUTSCHLAND GmbH**, Germany

NORWAY

FURUNO NORGE A/S
Sjømannsveien 19 6008 Ålesund
Service box 11, N-6025 Ålesund
Phone: +47 70 10 29 50
Fax: +47 70 10 29 51
E-mail: furuno@furuno.no

POLAND

FURUNO POLSKA Sp. Z O.O.
Ul. Wolności 20
81-327 Gdynia
Phone: +48 58 669 02 20
Fax: +48 58 669 02 21
E-mail: furuno@furuno.pl

PORTUGAL

Refer to **FURUNO ESPAÑA S.A.**, SPAIN

ROMANIA

Refer to **FURUNO (UK) LIMITED**, UK

SPAIN

FURUNO ESPAÑA S.A.
Francisco Remiro, 2-B
28028 Madrid
Phone: +34 91-725-90-88
Fax: +34 91-725-98-97
E-mail: furuno@furuno.es

SWEDEN

FURUNO SVERIGE AB
Gruvgatan 23
S-421 30 Västra Frölunda
Phone: +46 31-709 89 40
Fax: +46 31-49 70 93
E-mail: info@furuno.se (Sales)
service@furuno.se (Service)

U.K.

FURUNO (UK) LIMITED
West Building Penner Road Havant
Hampshire PO9 1QY
Phone: +44 2392-441000
Fax: +44 2392-484316
E-mail: sales@furuno.co.uk

UKRAINE

Refer to **FURUNO DANMARK AS**, DENMARK
and **OZSAY**, TURKEY



Catalog No. LIT-APC-024 Rev. A
Printed In The USA

Find us on 

BEWARE OF SIMILAR PRODUCTS

All other brand and product names are trademarks, registered trademarks, or service marks of their respective holders.

The information contained in this catalog is current as of January 01, 2024

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

