

FURUNO

OPERATOR'S MANUAL

GPS RECEIVER

MODEL **GP-320B**

IMPORTANT NOTICES

General

- The operator of this equipment must read and follow the descriptions in this manual. Wrong operation or maintenance can cancel the warranty or cause injury.
- Do not copy any part of this manual without written permission from FURUNO.
- If this manual is lost or worn, contact your dealer about replacement.
- The contents of this manual and equipment specifications can change without notice.
- The example screens (or illustrations) shown in this manual can be different from the screens you see on your display. The screens you see depend on your system configuration and equipment settings.
- Save this manual for future reference.
- Any modification of the equipment (including software) by persons not authorized by FURUNO will cancel the warranty.
- All brand and product names are trademarks, registered trademarks or service marks of their respective holders.

How to discard this product

Discard this product according to local regulations for the disposal of industrial waste. For disposal in the USA, see the homepage of the Electronics Industries Alliance (<http://www.eiae.org/>) for the correct method of disposal.

How to discard a used battery

Some FURUNO products have a battery(ies). To see if your product has a battery, see the chapter on Maintenance. Follow the instructions below if a battery is used. Tape the + and - terminals of battery before disposal to prevent fire, heat generation caused by short circuit.


In the European Union

The crossed-out trash can symbol indicates that all types of batteries must not be discarded in standard trash, or at a trash site. Take the used batteries to a battery collection site according to your national legislation and the Batteries Directive 2006/66/EU.



In the USA

The Mobius loop symbol (three chasing arrows) indicates that Ni-Cd and lead-acid rechargeable batteries must be recycled. Take the used batteries to a battery collection site according to local laws.



In the other countries

There are no international standards for the battery recycle symbol. The number of symbols can increase when the other countries make their own recycling symbols in the future.



SAFETY INSTRUCTIONS



CAUTION

Confirm that the power supply voltage is compatible with the voltage rating of the equipment.

Connection to the wrong power supply can cause fire or damage the equipment.

NOTICE

No one navigation device should ever be solely relied upon for the navigation of a vessel.

Always confirm position against all available aids to navigation, for safety of vessel and crew.

TABLE OF CONTENTS

SYSTEM OVERVIEW..... iv
EQUIPMENT LISTS vi


1. MOUNTING 1
2. WIRING 2
3. DEFAULT SETTINGS 6
4. TROUBLESHOOTING, BATTERY 7

SPECIFICATIONS..... SP-1


PACKING LIST
OUTLINE DRAWING
Declaration of Conformity

SYSTEM OVERVIEW

The GP-320B is a GPS receiver with WAAS (Wide Area Augmentation System) capability. WAAS, available in North America, is a provider in the worldwide SBAS (Satellite Based Augmentation System) navigation system. CBAS provides GPS signal corrections to SBAS users, for even better position accuracy, typically better than three meters. There are three more SBAS providers, MSAS (Multi-Functional Satellite Augmentation System) for Japan, EGNOS (Euro Geostationary Navigation Overlay Service) for Europe and GAGAN (GPS And GEO Augmented Navigation) for India. The illustration below shows the coverage area. (Accuracy may be affected when using a GEO satellite not within your current location.) This manual uses “WAAS” for these three providers generically.

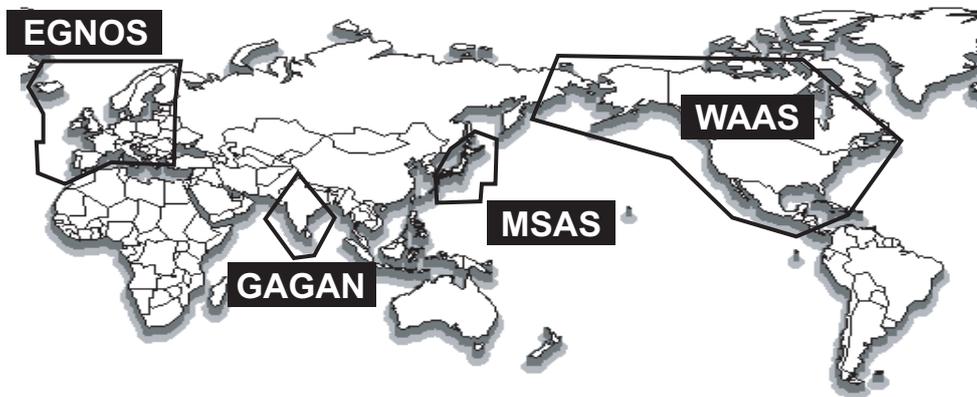

Provider	Satellite type	Longitude	Satellite No.
WAAS	Intelsat Galaxy XV	133°W	135
	TeleSat Anik F1R	107.3°	138
	Inmarsat-4-F3	98°W	133
EGNOS	Inmarsat-3-F2/AOR-E	15.5°W	120
	Artemis	21.5°E	124
	Inmarsat-4-F2	25°E	126
MSAS	MTSAT-1R	140°E	129
	MTSAT-2	145°E	137
GAGAN	Inmarsat-4-F1	64°E	127

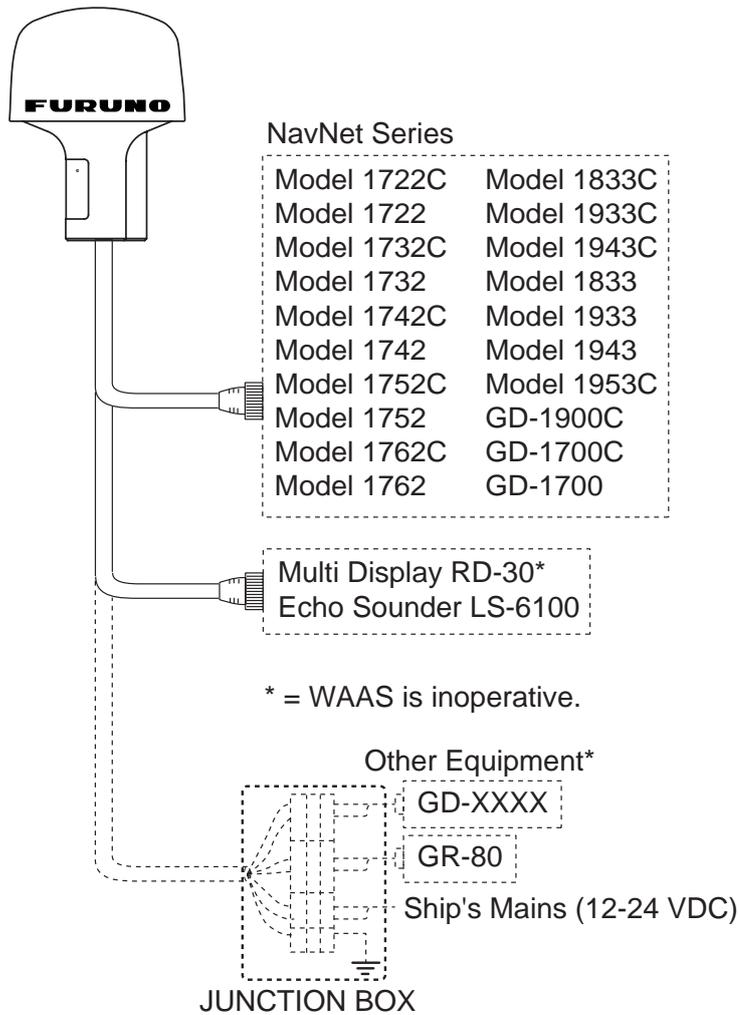

This GPS receiver complies with Canadian standard RSS-210 (Low Power License-Exempt Radio communication Devices).
 Operation is subject to the following two conditions:
 (1) this device may not cause interference, and
 (2) this device must accept any interference, including interference that may cause undesired operation of the device.

EQUIPMENT LISTS

Standard supply

Name	Type	Code No.	Qty	Remarks
GPS Receiver	GP-320B	—	1	With 10 m cable

Optional equipment

Name	Type	Code No.	Qty	Remarks
Cable Assembly	MJ-A7SPF/SRMD-100	000-144-534	1	7P-7P, straight, 10 m
Mast Mounting Kit	CP20-01111	004-365-780	1	
Right Angle Antenna Base	NO.13-QA330	000-803-239	1	
L-angle Antenna Base	NO.13-QA310	000-803-240	1	
Handrail-mount Antenna Base	NO.13-RC5160	000-806-114	1	

1. MOUNTING

NOTICE


Do not apply paint, anti-corrosive sealant or contact spray to coating or plastic parts of the equipment.

Those items contain organic solvents that can damage coating and plastic parts, especially plastic connectors.

Mounting considerations

Follow the guidelines below to choose a suitable mounting location for the antenna unit.

- The antenna may be mounted three ways: screwed into a pipe (local supply), fixed to a post with the optional mast mounting kit, or screwed into an optional mounting base. For fixing by the post or pipe, it is recommended to use stays to prevent damage to the GPS receiver.
- Select a location out of the radar beam. The radar beam will obstruct or prevent reception of the GPS signal.
- The location should be well away from a VHF antenna. A GPS receiver is interfered by a harmonic wave of a VHF antenna.
- The location should be well away from an Inmarsat antenna. Inmarsat transmission will obstruct or prevent reception of the GPS signal.
- There should be no interfering object within the line-of-sight to the satellites. Objects within line-of-sight to a satellite, for example, a mast, may block reception or prolong acquisition time.
- Mount the antenna unit as high as possible to keep it free of interfering objects and water spray, which can obstruct reception of the GPS signal if the water freezes.
- Observe the following minimum separation distances from other antenna units.

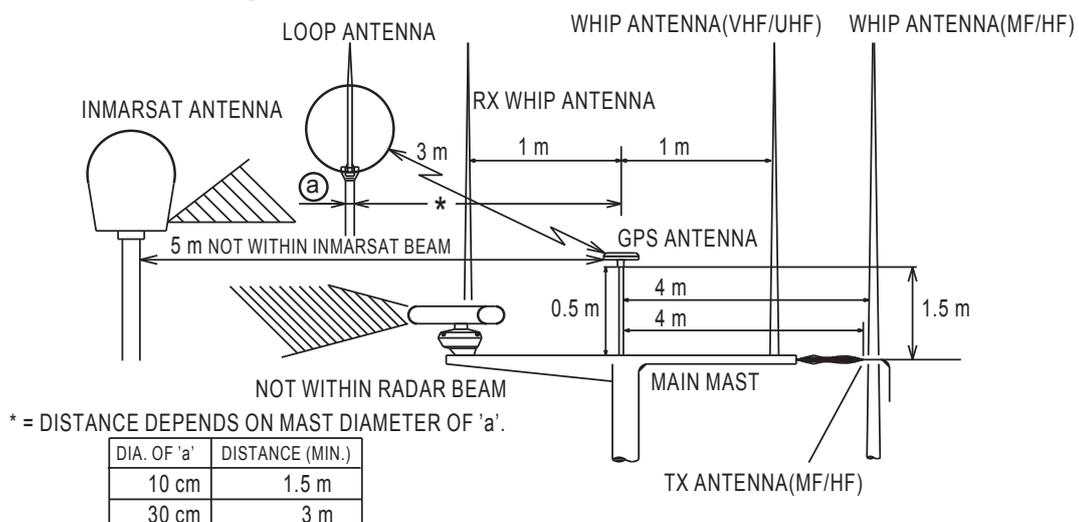

Mounting procedure

Install the antenna unit by referring to the installation diagram on page D-1.


2. WIRING

This unit outputs position and speed to external equipment. NavNet equipment, Multi Display RD-30 and Echo Sounder LS-6100 can be connected directly. For connection to other equipment, use a junction box (local supply) which has seven terminals.

The antenna cable is 10 meters long. If the distance between the antenna unit and the display monitor is more than 10 meters, use the optional cable assy. (10 m). Up to four extension cables can be connected serially.


Connecting to FURUNO NavNet equipment

Connect the antenna cable to the DATA1 port on NavNet equipment.

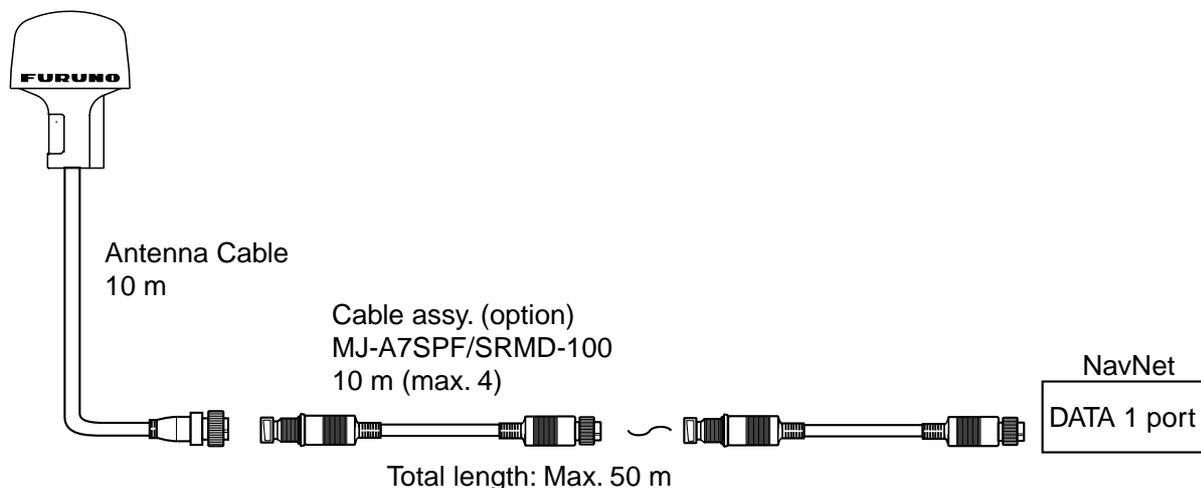


Waterproofing connectors

If you use the cable assy.(s), waterproof their connectors by wrapping them with vulcanizing tape and then vinyl tape. Bind tape ends with suitable cable-ties.

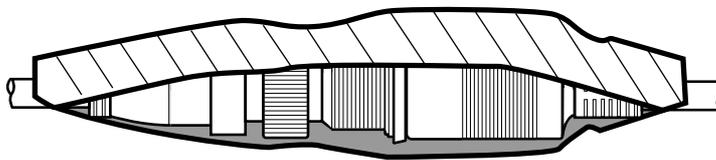


Connecting to Multi Display RD-30

WAAS is not operative in this installation.

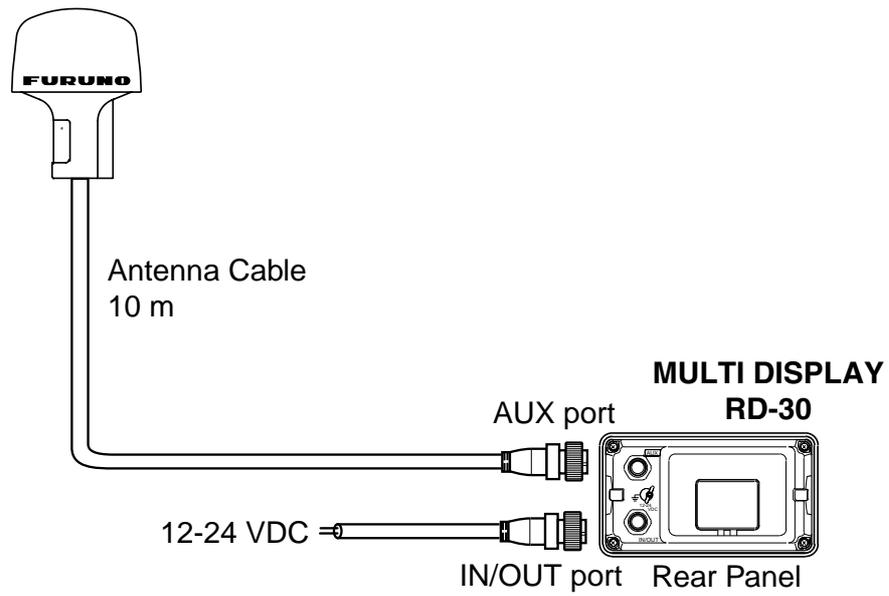


Connecting to Echo Sounder LS-6100

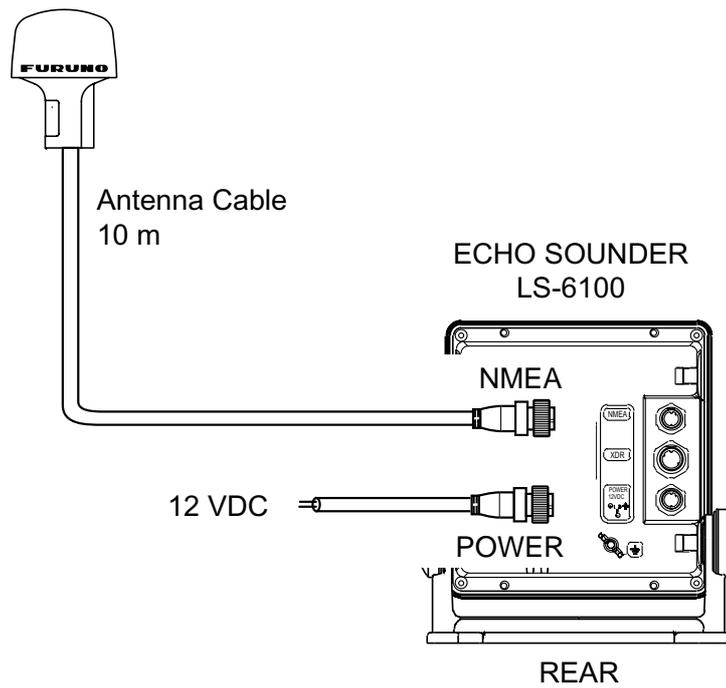

Connecting to other equipment

Remove the connector from the antenna cable and attach crimp-on lugs or similar terminals to the cable's cores. Connect the cores to the junction box as below.

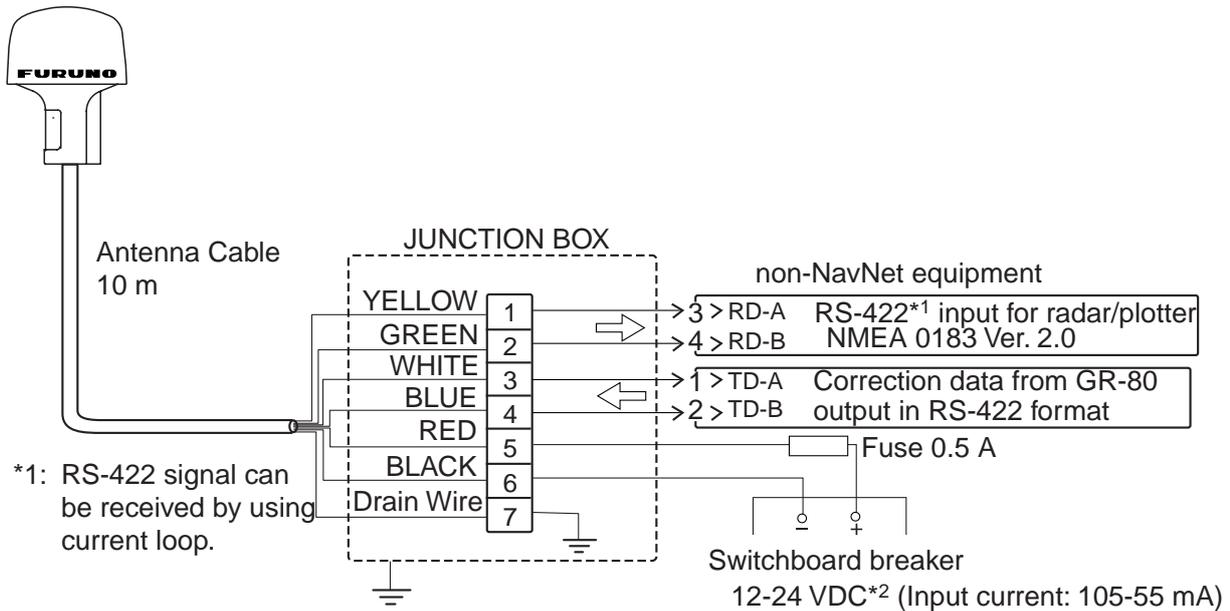

Note 1: When connecting FURUNO DGPS beacon receiver GR-80 to this unit, set it as follows:

Byte Format, 8-6; First Bit, LSB; Parity Bit, None; Stop Bit, 1; Bit Rate, 8.

Note 2: The signal ground and frame ground are separated, however the power line is not isolated. Therefore, do not connect the signal ground to the frame ground when other equipment is connected to a positive ground battery.

Note 3: WAAS function is inoperative when wiring as shown above.

Output/Input data sentences

Priority	Input Data		Output Data		Settable Output Cycle	Default Output
High ↑			GPDTM	Geometric datum	Yes	Yes
	XXGGA	GPS position status (time of fix, latitude, longitude, receive status, satellite used)	GPGGA	GPS fix data	Yes	Yes
	XXZDA	UTC date (time in minutes and seconds, day, month, year, time)	GPZDA	UTC time and date	Yes	Yes
	XXGLL	Position (latitude, longitude)	GPGLL	Geographic position, latitude and longitude	Yes	Yes
			GPVTG	Course over ground and ground speed	Yes	Yes
↓ Low	XXRMC	Navigation data (UTC time and latitude, longitude, ground speed, true course, year, month, day)	GPRMC	Recommended minimum specific GPS/TRANSIT data	Yes	Yes

Note 1: Data output from high to low priority.

Note 2: GPDTM data is attached in front of GPGGA, GPGLL and GPRMC when those sentences are output.

Note 3: "XX" means talker ID.

3. DEFAULT SETTINGS

	Setting	Default setting	Backup
GPS	Initial Latitude/Longitude	North=34°44.0000, East=135°21.0000	Yes
	Date, Time	2001/1/1, 00:00:13	Yes
	Antenna Height	0 m	Yes
	Almanac Data	—	Yes
	Ephemeris Data	—	Yes
RECEIVER	Local Zone Time	+0	Yes
	PDOP	6	Yes
	Geometric Datum	WGS84	Yes
	Mask Elevation	5°	Yes
	Disable Satellite	None	No
	Smoothing Coefficient	2 (Standard)	No
	Dynamic Coefficient	2 (Standard)	No
	Data Output (Cycle)	DTM, GGA, ZDA, GLL, VTG, RMC (1 s)	Yes
DGPS Setting Parameter	1 (LSB first)	Yes	
WAS	GEO Satellite, Provider ID	Auto: from 120, in sequential order	No
	WAAS Availability	OFF	No
	Type 0 Message	0: Correct data not output for 60 s	Yes

4. TROUBLESHOOTING, BATTERY

Troubleshooting

If the message “No position data” appears on the display of NavNet equipment, there may be a problem with the GPS receiver. Turn off the power and then check the following points:

- 1) Check for objects around the antenna which may interfere with reception.
- 2) Check that the antenna cable is firmly fastened.
- 3) If extension cable(s) are used, check for water leakage at junction point(s).
- 4) Check the antenna cable for damage.
- 5) Check the antenna for damage.

If the problem seems to be with the antenna cable or antenna, contact your dealer.

Battery

The antenna unit contains a lithium battery which preserves data when the power is turned off, and its life is approximately 20 years (operating rate 70%) for large vessels and 10 years (operating rate 20%) for small vessels. The equipment can be used when the voltage of the battery is low, however data is not backed up and the unit starts up in the “cold start” condition.

SPECIFICATIONS OF THE GPS RECEIVER GP-320B

1. GENERAL

1.1 Receiving Channels

GPS	12 channels parallel, 12 satellites tracking
WAAS	1 channel

1.2 Rx Frequency 1575.42 MHz

1.3 Rx Code C/A code, WAAS

1.4 Position Fixing System All in view, 8-state Kalman filter

1.5 Position Accuracy

GPS	10 m (95% of the time, HDOP 4)
DGPS	5 m (95% of the time, external data required)
WAAS	3 m (95% of the time)

1.6 Tracking Velocity 999 kt

1.7 Position-fixing Time Warm start: 12 s approx., Cold start: 90 s approx.

1.8 Position Update Interval 1 s

2. I/O INTERFACE

2.1 Data format IEC 61162-1 (NMEA 0183 Ver 2.30)

2.2 Output data DTM, GGA, ZDA, VTG, GLL, RMC

2.3 Input data DGPS: RTCM SC-104
Control command

3. POWER SUPPLY

12-24 VDC: 105-55 mA

4. ENVIRONMENTAL CONDITION

4.1 Ambient Temperature -25°C to +70°C

4.2 Relative Humidity 95% at 40°C

4.3 Water proofing IEC 60529: IPX6

4.4 Vibration IEC 60945

5. COATING COLOR



N9.5

PACKING LIST

20AW-X-9852 -1 1/1

GP-320B (E)

A-1

NAME	OUTLINE	DESCRIPTION/CODE No.	Q'TY
ユニット UNIT			
GPS受信機 GPS RECEIVER		GP-320B (E) 004-367-500-00	1
図書 DOCUMENT			
取扱説明書 OPERATOR'S MANUAL		OME-44220-* 000-809-291-1*	1

型式/コード番号が2段の場合、下段より上段に代わる過渡期品であり、どちらかが入っています。なお、品質は変わりません。


TWO TYPES AND CODES MAY BE LISTED FOR AN ITEM. THE LOWER PRODUCT MAY BE SHIPPED IN PLACE OF THE UPPER PRODUCT. QUALITY IS THE SAME.

(略図の寸法は、参考値です。DIMENSIONS IN DRAWING FOR REFERENCE ONLY.)


20AW-X-9852

寸法区分(mm) DIMENSION	公差(mm) TOLERANCE
0 < L ≤ 50	±1.5
50 < L ≤ 100	±2.5
100 < L ≤ 500	±3


表 1 TABLE 1

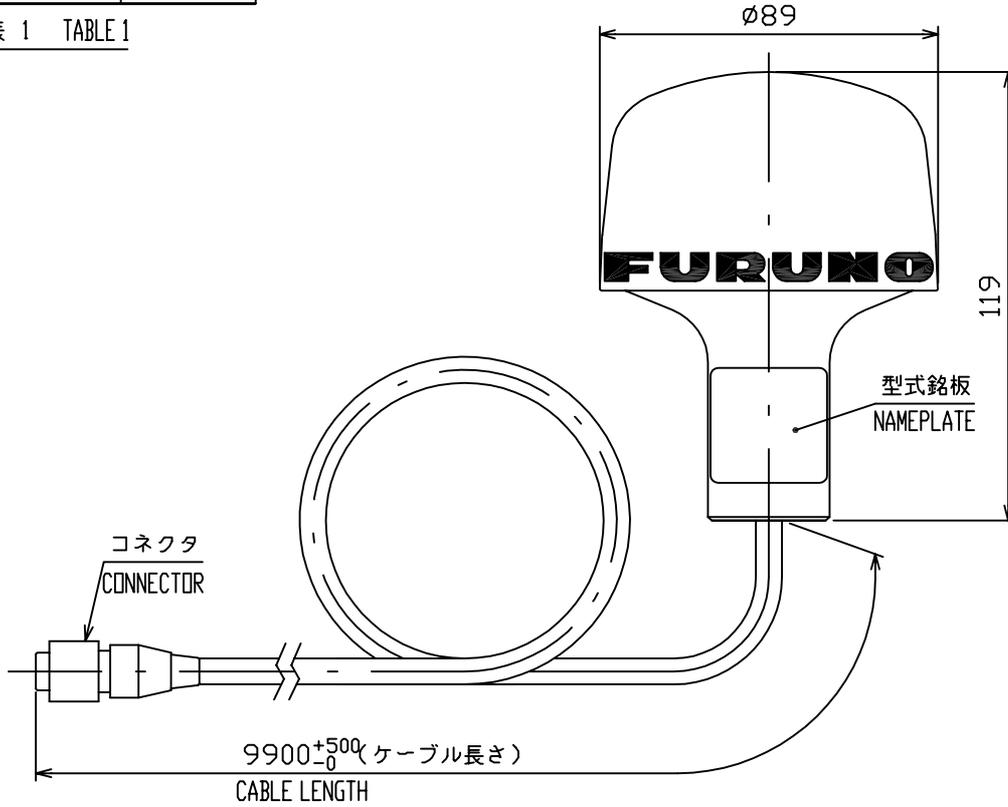

1-14UNS1B
 ねじ山数(25.4mmにつき): 14
 ピッチ: 1.8143 mm
 オネジ有効長さ: 15.17 mm
 オネジ有効径: 24.17 mm
 THREAD PER 25.4mm (1 INCH): 14
 PITCH: 1.8143 mm
 THREAD LENGTH: 15.17 mm
 PITCH DIAMETER: 24.17 mm

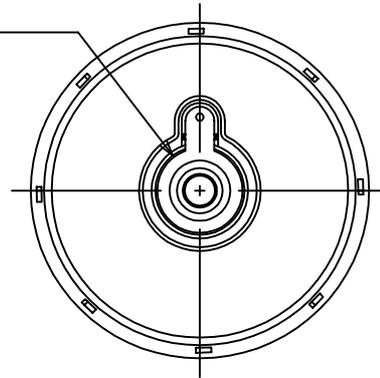

機器との接続 CONNECTION TO EQUIPMENT

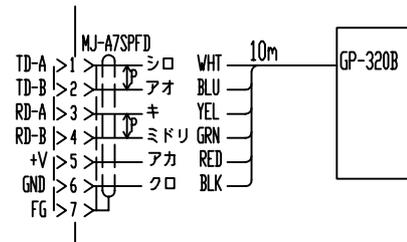

注記: 指定外の寸法公差は表 1 による
 NOTE: TABLE 1 INDICATES TOLERANCE OF DIMENSIONS.

DRAWN Sep. 20 '02 T.YAMASAKI		TITLE GP-320B
CHECKED Sep. 20 '02 Y.KIMURA		名称 GPS受信機
APPROVED Sep. 20 '02 Y. Kimura		外寸図
SCALE 1/2	MASS 0.80 kg	NAME GPS RECEIVER
DWG No. C4422-G01-C	質量はケーブルを含む。 MASS W/ CABLE 20-023-100G-1	OUTLINE DRAWING

FURUNO**FURUNO ELECTRIC CO., LTD.**

9-52 Ashihara-Cho, Nishinomiya City, 662-8580, Hyogo, Japan

Tel: +81 798-65-2111 Fax: +81 798-65-4200

Pub NO. DOC-461

Declaration of ConformityWe **FURUNO ELECTRIC CO., LTD.**-----
(Manufacturer)

9-52 Ashihara-Cho, Nishinomiya City, 662-8580, Hyogo, Japan

(Address)

declare under our sole responsibility that the product

GPS receiver Model GP-320B-----
(Model name, serial number)

is in conformity with the essential requirements as described in the Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment (R&TTE Directive) and satisfies all the technical regulations applicable to the product within this Directive

EN 60945: 1997-01 (IEC 60945 Third edition: 1996-11)

EN 60950: 2000 (IEC 60950: 1999-04)

(title and/or number and date of issue of the standard(s) or other normative document(s))

For assessment, see

- Statement of Opinion N° 02214062/AA/00 of 10 April 2002 issued by Telefication, The Netherlands
- EMC Test report FLI 12-02-004 of 25 February 2002 and Safety Test report FLI 12-02-005 of 28 February 2002 prepared by Furuno Labotech International Co., Ltd.

On behalf of Furuno Electric Co., Ltd.

Hiroaki Komatsu
Manager,
International Rules and Regulations

Nishinomiya City, Japan
June 17, 2002

(Place and date of issue)-----
(name and signature or equivalent marking of authorized person)

ECF

(Elemental Chlorine Free)

The paper used in this manual
is elemental chlorine free.

FURUNO ELECTRIC CO., LTD.

9-52 Ashihara-cho,
Nishinomiya, 662-8580, JAPAN

Telephone : +81-(0) 798-65-2111

Fax : +81-(0) 798-65-4200

• FURUNO Authorized Distributor/Dealer

All rights reserved. Printed in Japan

Pub. No. OME-44220-B2

(AKMU) GP-320B

A : APR. 2002

B2 : JAN. 13, 2011



* 0 0 0 8 0 9 2 9 1 1 0 *